

- LUCE -

MINI TRACK AM26A

surface/suspended system

Quickinfo

GENERAL
surface, suspended
IP20

ELECTRICAL
NON DIM, DIM DALI, BLE MESH
transparent feeder cable

PHYSICAL
aluminium
spray powder

RIFFETTORE



GRAFICA





GRIGLIA



Description

Extruded aluminium profile with 26mm width groove; for wall-/ceiling surface mounting or suspended mounting (1500 mm cable suspension); height adjustment without tools; incl. black feed; designed for continuous lighting systems, 90° angle connectors for flexible system design; with integrated power track profile for take off of supply voltage and DALI signal; surface spray powder black or white/black; can be installed flexibly and without tools by means of magnetic holders+locking; a maximum of 3 internal converters can be used in one system; degree of protection IP 20; PC I / PC II (power supply) or PC III (light insets); either non dimmable, DALI or BLE Mesh

- LUCE -



MINI TRACK AM26A suspended indirect

order installation track, light insets+ mounting accessories separately



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES



inset single control via KC BLE Mesh app

INSTALLATION TRACK

L (mm)		ORDER CODE
1000	channel	AM26A-10
2000	channel	AM26A-20
3000	channel	AM26A-30
100x100	channel corner* V90°	AM26A-V90
100x100	channel corner* H90°	AM26A-H90
100x100	channel corner* E90°	AM26A-E90.

POWER FEEDER UNIT

TYPE	ORDER CODE
2x2,5mm ² /2x2,5 + 2x0,5mm ² /cable length 500mm	AM26A-L01
2x2,5mm ² /2x2,5 + 2x0,5mm ² /cable length 2000mm	AM26A-L02

CONNECTOR SET

TYPE	ORDER CODE
linear flexible	AM26A-L03

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear connector surface+suspended	AM26A-L04

END CAPS

TYPE	ORDER CODE
end caps (pair)	AM26L-05

CEILING FASTENER/CABLE SUSPENSION/CANOPY

TYPE	L (mm)	ORDER CODE
ceiling fastener	20	
cable susp. (use every 2000mm)	2000	
canopy	35x22.5	AM26A-L06

TYPE	ORDER CODE
driver box choose one to install power supply	AM26A-L07

TYPE	ORDER CODE
driver box choose one to install power supply	AM26A-L08

MATERIAL COLOUR | BK ■ |

MATERIAL | AL |

- LUCE -

MINI TRACK AM26T

trimless system

Quickinfo

GENERAL
recessed trimless
IP20

ELECTRICAL
NON DIM, DIM DALI, BLE MESH

PHYSICAL
aluminium
spray powder

RIFLETTORE



GRAFICA



GRIGLIA



Description

Extruded aluminium profile with 26mm width groove; suitable for trimless installation in plasterboard ceilings with each ceiling of various thickness ; suitable for wall or ceiling mounting; designed for continuous lighting systems, 90° angle connectors for flexible system design; with integrated power track profile for take off of supply voltage and DALI signal; spray powder; can be installed flexibly and without tools by means of magnetic holders+locking; a maximum of 3 internal converters can be used in one system; degree of protection IP20; PC I / PC II (power supply) or PC III (light insets); either non dimmable, DALI or BLE Mesh control

- LUCE -



MINI TRACK AM26T Trimless

order installation track, light insets+ mounting accessories separately



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES



inset single control via KC BLE Mesh app

INSTALLATION TRACK

L (mm)		ORDER CODE
1000	channel	AM26T-10
2000	channel	AM26T-20
3000	channel	AM26T-30

		ORDER CODE
100x100	channel corner* V90°	AM26T-V90
100x100	channel corner* H90°	AM26T-H90
100x100	channel corner* E90°	AM26T-E90

POWER FEEDER UNIT

TYPE	ORDER CODE
2x2,5mm ² /2x2,5 + 2x0,5mm ² /cable length 500mm	AM26L-U1
2x2,5mm ² /2x2,5 + 2x0,5mm ² /cable length 2000mm	AM26L-U2

CONNECTOR SET

TYPE	ORDER CODE
linear flexible	AM26L-03

CONNECTOR SET

TYPE	ORDER CODE
mechanical linear connector surface+suspended	AM26L-04

END CAPS

TYPE	ORDER CODE
end caps (pair)	AM26L-05

CONVERTER BUILT-IN TRACK supply 220-240V AC, 48V, 50-60Hz, ENEC approved, incl. feeder cable 2000mm

MATERIAL COLOUR | BK ■ | MATERIAL | AL |

- LUCE -

MINI TRACK AM26R trim system

Quickinfo

GENERAL

recessed, trim
IP20

ELECTRICAL

NON DIM, DIM DALI, BLE MESH
transparent feeder cable

PHYSICAL

aluminium
spray powder

RIFLETTORE



GRAFICA




GRIGLIA



Description

Extruded aluminium profile with 26mm width groove; suitable for trimless installation in plasterboard ceilings with each ceiling of various thickness ; suitable for wall or ceiling mounting; designed for continuous lighting systems, 90° angle connectors for flexible system design; with integrated power track profile for take off of supply voltage and DALI signal; spray powder; can be installed flexibly and without tools by means of magnetic holders+locking; a maximum of 3 internal converters can be used in one system; degree of protection IP 20; PC I / PC II (power supply) or PC III (light insets); either non dimmable, DALI or BLE Mesh control

- LUCE -



MINI TRACK AM26R Trim

order installation track, light insets+ mounting accessories separately



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES



inset single control via KC BLE Mesh app

INSTALLATION TRACK

L (mm)

1000
2000
3000

channel
channel
channel

ORDER CODE

AM26R-10
AM26R-20
AM26R-30

100x100

channel corner* V90°

AM26R-V90

100x100

channel corner* H90°

AM26R-H90

100x100

channel corner* E90°

AM26R-E90

POWER FEEDER UNIT

TYPE

2x2,5mm ² /2x2,5 + 2x0,5mm ² /cable length 500mm
2x2,5mm ² /2x2,5 + 2x0,5mm ² /cable length 2000mm

ORDER CODE

AM26L-01
AM26L-02

CONNECTOR SET

TYPE

linear flexible

ORDER CODE

AM26L-03

CONNECTOR SET

TYPE

mechanical linear connector surface+suspended

ORDER CODE

AM26L-04

END CAPS

TYPE

end caps (pair)

ORDER CODE

AM26L-05

CONVERTER BUILT-IN TRACK supply 220-240V AC, 48V, 50-60Hz,
ENEC approved, incl. feeder cable 2000 mm

MATERIAL COLOUR | BK ■ |

MATERIAL | AL |

- LUCE -

MINI TRACK AM26E

trimless system

Quickinfo

GENERAL
recessed, trimless
IP20

ELECTRICAL
NON DIM, DIM DALI, BLE MESH
transparent feeder cable

PHYSICAL
aluminium
spray powder

RIFLETTORE



GRAFICA



GRIGLIA



Description

Extruded aluminium profile with 26mm width groove; suitable for trimless installation in plasterboard ceilings with each ceiling of various thickness ; suitable for wall or ceiling mounting; designed for continuous lighting systems, 90° angle connectors for flexible system design; with integrated power track profile for take off of supply voltage and DALI signal; spray powder; can be installed flexibly and without tools by means of magnetic holders+locking; a maximum of 3 internal converters can be used in one system; degree of protection IP20; PC I / PC II (power supply) or PC III (light insets); either non dimmable, DALI or BLE Mesh control



MINI TRACK AM26E Trimless

order installation track, light insets+ mounting accessories separately



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES



inset single control via KC BLE Mesh app

INSTALLATION TRACK

L (mm)

1000
2000
3000

channel
channel
channel

ORDER CODE

AM26E-10
AM26E-20
AM26E-30

100x100

channel corner* V90°

AM26E-V90.

100x100

channel corner* H90°

AM26E-H90

100x100

channel corner* E90°

AM26E-E90

POWER FEEDER UNIT

TYPE

2x2,5mm ² /2x2,5 + 2x0,5mm ² /cable length 500mm
2x2,5mm ² /2x2,5 + 2x0,5mm ² /cable length 2000mm

ORDER CODE

AM26L-01
AM26L-02

CONNECTOR SET

TYPE

linear flexible

ORDER CODE

AM26L-03

CONNECTOR SET

TYPE

mechanical linear connector surface+suspended

ORDER CODE

AM26L-04

END CAPS

TYPE

end caps (pair)

ORDER CODE

AM26L-U5

CONVERTER BUILT-IN TRACK supply 220-240V AC, 48V, 50-60Hz,
ENEC approved, incl. feeder cable 2000mm

MATERIAL COLOUR | BK ■ |

MATERIAL | AL |



MKIT



- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E

spotlight insets



MK/003/IT25-08A01

Power	3W
Beam angle	10°/15°/30°/36°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	48lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



MK/008/IT35-01A01

Power	8W
Beam angle	15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	57lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB



MK/016/IT35-01A02

Power	2*8W
Beam angle	15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	56lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB



COLOUR | BK ■ WH □ BK+GD ■ WH+GD ■ | MATERIAL | AL |

- LUCE -


MINI TRACK AM26A/AM26T/AM26R/AM26E

spotlight insets



MK/012/IT45-02A01

Power	12W
Beam angle	7°/15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	87lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB



MK/024/IT45-02A02


Power	2*12W
Beam angle	7°/15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	76lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh


FEATURES



COLOUR | BK ■ WH □ BK+GD ■ WH+GD ■ | MATERIAL | AL |



NEW
MKIT45

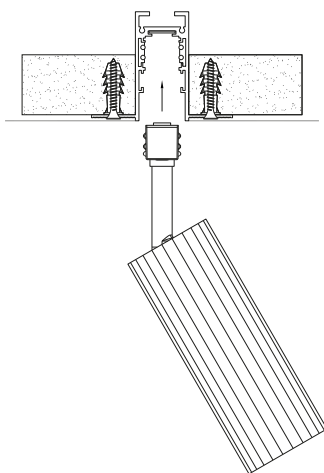

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E spotlight insets



MK/012/IT45-02B01

Power	12W
Beam angle	7°/15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	87lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB



MK/024/IT45-02B02


Power	2*12W
Beam angle	7°/15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	76lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB




OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh


FEATURES



MK/012/IT45-02B01



MK/024/IT45-02B02



COLOUR | BK ■ WH □ | MATERIAL | AL □ |

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E

spotlight insets



MK/015/IT55-03A01

Power	15W
Beam angle	15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	52lm/W
Color rendering index	≥90
Operating temperature	-25+50
Rated life hours	35,000-50,000H
LED chip	COB



MK/015/IT55-03B01

Power	15W
Beam angle	15°-36°/36°-60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	77lm/W
Color rendering index	≥90
Operating temperature	-25+50
Rated life hours	35,000-50,000H
LED chip	COB



MK/025/IT70-06A01

Power	25W
Beam angle	15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	102lm/W
Color rendering index	≥90
Operating temperature	-25+50
Rated life hours	35,000-50,000H
LED chip	COB



COLOUR | BK ■ WH □ BK+GD ■ WH+GD ■ | MATERIAL | AL |

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E

spotlight insets



MK/025/IT70-06B01



Power	25W
Beam angle	15°-36°/36°-60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	86lm/W
Color rendering index	≥90
Operating temperature	-25+50
Rated life hours	35,000-50,000H
LED chip	COB



OPTIONS

1	NODIM
2	DIM DALI
3	BLE Mesh

FEATURES

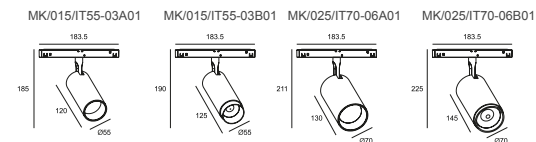

COLOUR | BK ■ WH □ BK+GD ■ WH+GD ■ | MATERIAL | AL |



MKTO

MINI TRACK AM26A/AM26T/AM26R/AM26E
spotlight insets





- LUCE -

MK/020/TO-05A01	
Power	20W
Beam angle	15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	100lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB
CE CB TUV   IP 20 48V   HOT PLUG SAFE   	

MK/020/TO-05B01	
Power	20W
Beam angle	wallwasher
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	42lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB
CE CB TUV   IP 20 48V   HOT PLUG SAFE   	

OPTIONS	
1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES	
	inset single control via KC BLE Mesh app



COLOUR | BK ■ WH □ | MATERIAL |  AL |



PIEGARE



- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E
spotlight insets



MK/010/PIE-07A06

Power	10W
Beam angle	10°/15°/30°/36°/10°30°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	91lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



MK/020/PIE-07A12

Power	20W
Beam angle	10°/15°/30°/36°/10°30°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	99lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



MK/008/PIE-07B06

Power	8W
Beam angle	112°
Color temperature	3000K-6000K
Light efficiency	50lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



COLOUR | BK ■ WH □ | MATERIAL | AL |

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E
spotlight insets




MK/015/PIE-07B12

Power	15W
Beam angle	112°
Color temperature	3000K-6000K
Light efficiency	45lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



OPTIONS	
1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES	
	Inset single control via KC BLE Mesh app

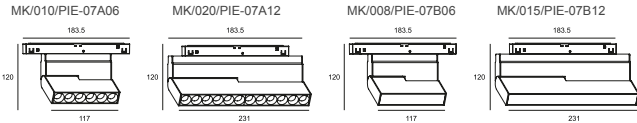

COLOUR | BK ■ WH □ | MATERIAL | AL |



GRIGLIA

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E griglia



MK/010/GRI-21A06	
Power	10W
Beam angle	10°/15°/30°/36°/10°*30°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	83lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



MK/020/GRI-21A12	
Power	20W
Beam angle	10°/15°/30°/36°/10°*30°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	85lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD




OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh


FEATURES



MK/010/GRI-21A06




MK/020/GRI-21A12



COLOUR | BK ■ WH □ | MATERIAL | AL

CORDA

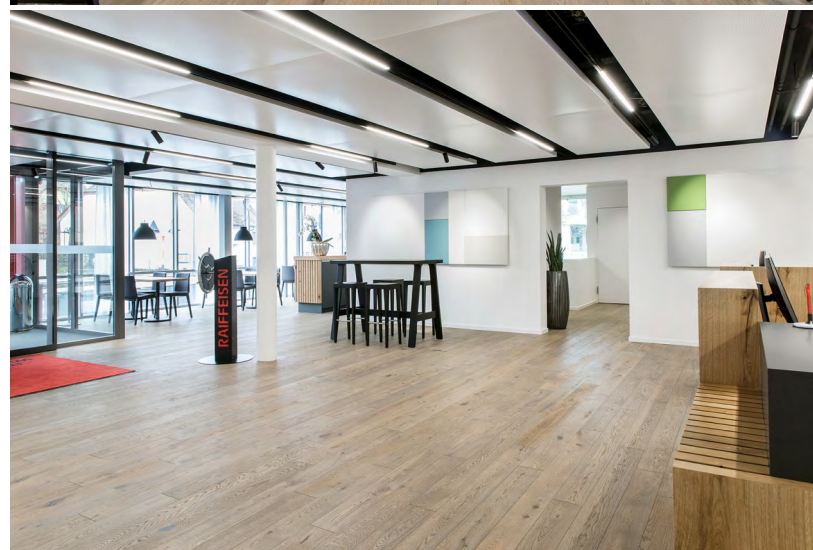

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E
graphic light insets



MK/010/COR-22A03

Power	10W
Beam angle	112°
Color temperature	3000-6000K
Light efficiency	61lm/W
Color rendering index	≥80
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



MK/020/COR-22A06

Power	20W
Beam angle	112°
Color temperature	3000-6000K
Light efficiency	65lm/W
Color rendering index	≥80
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



MK/030/COR-22A09

Power	30W
Beam angle	112°
Color temperature	3000-6000K
Light efficiency	66lm/W
Color rendering index	≥80
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



COLOUR | BK ■ | MATERIAL | AL |

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E
graphic light insets



MK/040/COR-22A12


Power	40W
Beam angle	112°
Color temperature	3000-6000K
Light efficiency	59lm/W
Color rendering index	≥80
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES

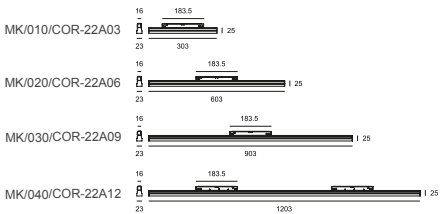

COLOUR | BK ■ | MATERIAL | AL |



FIORIRE

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E suspended



MK/003/FIO-34A01

Power	3W
Beam angle	112°
Color temperature	3000K
Light efficiency	50lm/W
Color rendering index	≥87
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	OLED



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES



inset single control via
KC BLE Mesh app





COLOUR | BK ■ WH □ | MATERIAL | AL |



NEW
PALLA

MINI TRACK AM26A/AM26T/AM26R/AM26E suspended



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

MK/006/PAL-35A01	
Power	6W
Beam angle	150°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	80lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD





MK/010/PAL-35A02	
Power	10W
Beam angle	150°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	96lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



MK/012/PAL-35A03	
Power	12W
Beam angle	150°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	90lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



FEATURES



COLOUR | BK ■ WH □ GD ■ CR ■ | MATERIAL | AL |



- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E suspended



MK/020/CON-36A01


Power	20W
Beam angle	15°/23°/36°/60°
Color temperature	3000K
Light efficiency	90lm/W
Color rendering index	≥87
Operating temperature	-25-+50
Rated life hours	35,000-50,000h
LED chip	COB



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES



COLOUR | BK+GD BK+WH | MATERIAL | AL

MINO

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E suspended




MK/010/MIN-32A33	
Power	10W
Beam angle	15°/23°/36°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	94lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB



OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES



COLOUR | BK ■ WH □ RD ■ GN ■ BU ■ YL ■ MATERIAL | AL

MINO

- LUCE -

MINI TRACK AM26A/AM26T/AM26R/AM26E suspended



MK/012/MIN-33A20

Power	12W
Beam angle	15°/23°/36°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	78lm/W
Color rendering index	≥90
Operating temperature	-25+50
Rated life hours	35,000-50,000H
LED chip	COB



MK/015/MIN-33A30

Power	15W
Beam angle	15°/23°/36°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	74lm/W
Color rendering index	≥90
Operating temperature	-25+50
Rated life hours	35,000-50,000H
LED chip	COB




OPTIONS

1	NO DIM
2	DIM DALI
3	BLE Mesh

FEATURES



MK/012/MIN-33A20



MK/015/MIN-33A30



COLOUR | BK ■ WH □ GD ■

MATERIAL | AL