

-LUCE-



-LUCE-

OUTDOOR

ADLIGHT sp. z o.o.
Arkadii 2
04-998 Warszawa
www.adlight.pl
tel: 22 100 55 74


OUTDOOR

2016
Summer

NEW
LED Light
Outdoor Light




Colors for selection



1 Graphite



2 Silver



3 Rusty



4 White

	ZH1421P1~P2		ZH5811P37~P38		ZH2691P71~P72		ZH2213P105~P106
	ZH1331P3~P4		ZH1501P39~P40		ZH2563P73~P74		ZH2383P107~P108
	ZH5764P5~P6		ZH1551P41~P42		ZH2562P75~P76		ZH2571P109~P110
	ZH5684P7~P8		ZH1571P43~P44		ZH2613P77~P78		ZH2441P111~P112
	ZH1363P9~P10		ZH1461P45~P46		ZH2621P79~P80		ZH2621P113~P116
	ZH1301P11~P12		ZH5643P47~P48		ZH2473P81~P82		ZH5671P117~P120
	ZH2263P13~P14		ZH5701P49~P52		ZH871P83~P84		ZH5731P121~P124
	ZH5751P15~P16		2661-LED.....P53~P54		ZH1241P85~P86		ZH5443P125~P126
	ZH1291P17~P18		ZH2661P55~P56		ZH1251P87~P88		ZH5713P127~P130
	ZH1393P19~P20		ZH1341P57~P58		ZH1151P89~P90		ZH5845P131~P134
	ZH5801P21~P22		ZH1511P59~P60		ZH1152P91~P92		ZH1111P135~P138
	ZH5651P23~P24		ZH2671P61~P62		ZH2542P93~P94		ZH1351P139~P140
	ZH1221P25~P26		ZH2811P63~P64		ZH2541P95~P98		ZH2721P141~P142
	ZH5781P27~P28		ZH2631P65~P66		ZH1541P99~P100		ZH2722P143~P146
	ZH5791P29~P30		ZH2891P67~P68		ZH1531P101~P102		ZH1202P147~P148
	ZH1143P31~P36		ZH2553P69~P70		ZH2841P103~P104		ZH2834P149~P152

	ZH2492	P153~P156
	ZH2501	P157~P160
	ZH1171	P161~P162
	ZH1401	P163~P164
	ZH2713	P165~P166
	ZH2733	P167~P170
	ZH2753	P171~P172
	ZH5853	P173~P174
	ZH8443	P175~P178
	ZH8453	P179~P182
	ZH8456	P183~P186
	ZH8463	P187~P188
	ZH8433	P189~P192
	ZH1222	P193~P196
	ZH5833	P197~P198
	ZH1431	P199~P200

	ZH1471	P201~P202
	ZH1491	P203~P206
	ZH1261	P207~P208
	ZH1262	P209~P210
	ZH8403	P211~P212
	ZH8404	P213~P214
	ZH8413	P215~P216
	ZH8414	P217~P218
	ZH1272	P219~P220
	ZH1271	P221~P222
	ZH5821	P223~P224
	ZH1102	P225~P226
	ZH5871	P227~P228
	ZH2741	P229~P232
	ZH2591	P233~P234
	ZH26811	P235~P236

	ZH2861	P237~P238
	ZH2202	P239~P240
	ZH1381	P241~P242
	ZH1441	P243~P244
	ZH2701	P245~P246
	ZH2581	P247~P248
	ZH2511	P249~P250
	ZH25211	P251~P252
	ZH1133	P253~P256
	ZH1131	P257~P258
	ZH1123	P259~P260
	ZH1121	P261~P262
	ZH2791	P263~P264
	ZH2771	P265~P266
	ZH1391	P267~P268
	ZH1281	P269~P270


	ZH1211	P271~P274
	ZH2792	P275~P276
	ZH1161	P277
	ZH2641	P278~P280
	ZH2251	P281
	ZH2273	P282
	ZH7371	P283~P284
	ZH2291	P285
	ZH2101	P286



Ceiling light





ZH1421

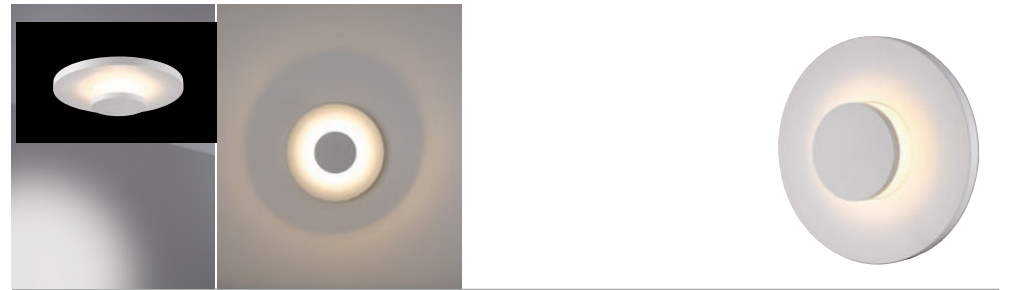

Item No.	Watt(18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/1421	24x0.75W SMD	3000K	876lm	160°	81	⊕ 200-240V~ 50Hz	0.99	IP54 

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver

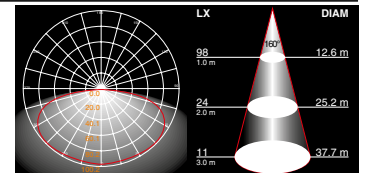





ZH1331



Item No.	Watt(18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/1331	86x0.2W SMD	3000K	1112lm	116°	84	⊕ 200-240V~ 50Hz	0.93	IP54 ⚡ ⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver







ZH5764



ZH5774





ZH5764



ZH5774

Item No.	Watt(18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/5764	86x0.2W SMD	3000K	927lm	106°	84	⊕ 200-240V~ 50Hz	0.93	IP54 ⚠ ⚡
ZH/018/5774	86x0.2W SMD	3000K	808lm	106°	84	⊕ 200-240V~ 50Hz	0.93	IP54 ⚠ ⚡

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver






ZH5683





ZH5693




Item No.	Watt (18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/5683	86x0.2W SMD	3000K	591lm	108°	85	⊕ 200-240V~ 50Hz	0.93	IP54 ⚡ ⚠
ZH/018/5693	86x0.2W SMD	3000K	600lm	109°	85	⊕ 200-240V~ 50Hz	0.93	IP54 ⚡ ⚠


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver



Razio mini

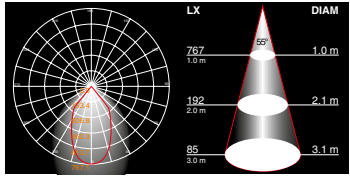

ZH1363



ZH1364

Ceiling light




ZH1363

ZH1364



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/1363	1x9W COB	3000K	633lm	55°	83	⊕ 200-240V~ 50Hz	0.95	IP65 ⚡ ⚡ ⚡
ZH/015/1364	1x15W COB	3000K	854lm	55°	80	⊕ 200-240V~ 50Hz	0.88	IP65 ⚡ ⚡ ⚡

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek






ZH1301





20° Adjustable

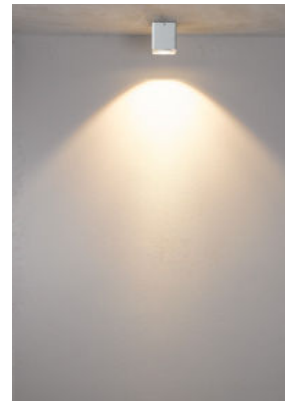

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/1301	1x9W CREE	3000K	655lm	43°	82	200-240V~ 50Hz	0.94	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

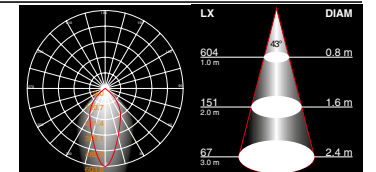





Ceiling light




ZH2236



ZH2386

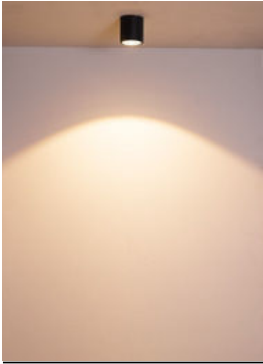


ZH2236




ZH2386

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2236	1x7W CREE	3000K	480lm	17°	82	⊕ 200-240V~ 50Hz	0.53	IP54
ZH/007/2386	1x7W CREE	3000K	444lm	19°	82	⊕ 200-240V~ 50Hz	0.53	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek




ZH2236



ZH2386

Isobar

Wall light


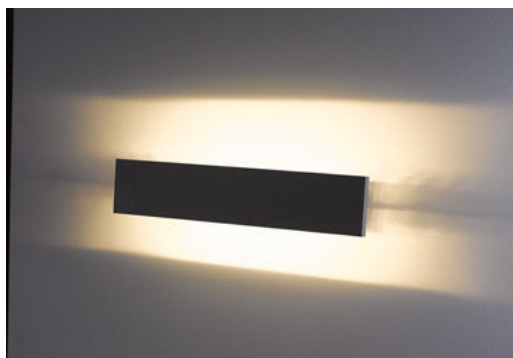


ZH5751



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/020/5751	10x2W CREE	3000K	396lm	98°	83	200-240V~ 50Hz	0.90	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- LED driver certified by Intertek

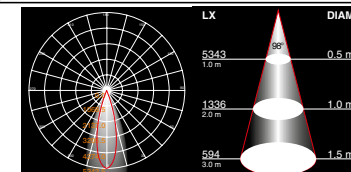

Nodus





ZH1291



Item No.	Watt(36W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/036/1291	172x0.2W SMD	3000K	2232lm	107°	84	⊕ 200-240V~ 50Hz	0.99	IP65



- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver



ZH1292

Item No.	Watt(18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/1292	86x0.2W SMD	3000K	1188lm	107°	84	⊕ 200-240V~ 50Hz	0.99	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver

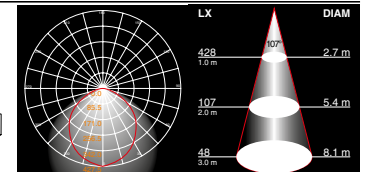

Nodus mini



ZH1294





ZH1293





Item No.	Watt(18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/1293	24x0.75W SMD	3000K	1086lm	110°	84	⊕ 200-240V~ 50Hz	0.97	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver



Item No.	Watt(9W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/1294	12x0.75W SMD	3000K	548lm	110°	84	⊕ 200-240V~ 50Hz	0.97	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver



Polied



Wall light





ZH5801



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/036/5801	18x2W CREE	3000K	1964lm	28°	84	200-240V~ 50Hz	0.89	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

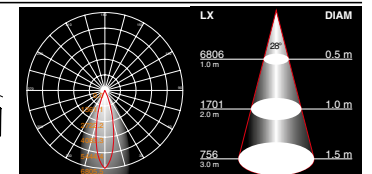





ZH5651



ZH5652

Item No.	Watt		Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/5652	6x3W		3000K	392lm	47°	77	⊕ 200-240V~ 50Hz	0.92	IP54

- ▲ 5651: E27 max.18 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

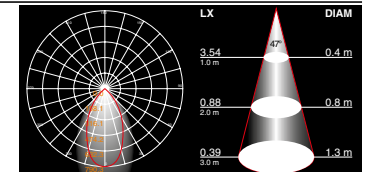





ZH1521



Item No.	Watt(15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1521	24x0.6W SMD	3000K	567lm	101°	83	⊕ 200-240V~ 50Hz	0.97	IP54 ⚡ ⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- AC LED, without driver





Zed

Wall light





ZH5781




Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/012/5781	4x3W CREE	3000K	426lm	65°	81	200-240V~ 50Hz	0.83	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek





Wall light


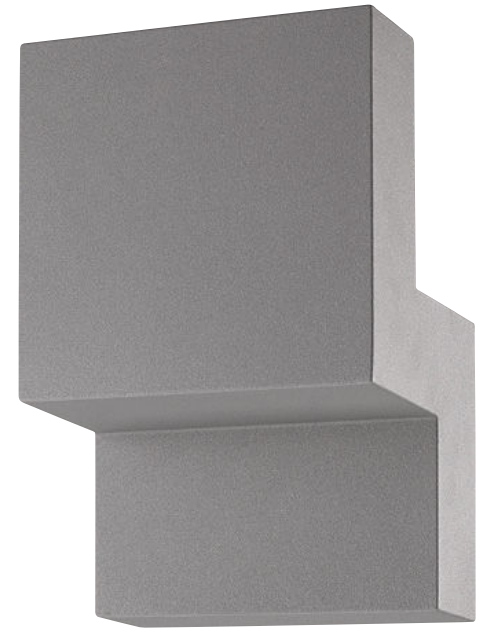


ZH5791



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/012/5791	4x3W CREE	3000K	366lm	64°	82	200-240V~ 50Hz	0.84	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

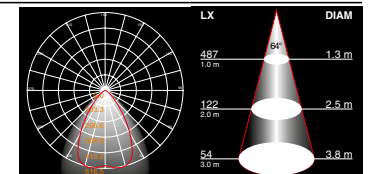



Wall light





ZH1143



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1143 1x15W	CREE	3000K	718lm	97°	82	200-240V~ 50Hz	0.88	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- LED driver certified by Intertek

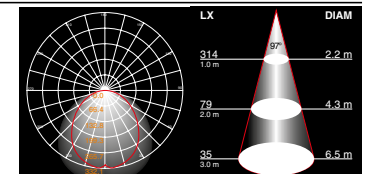





Wall light



ZH1141


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/1141	1x7W CREE	3000K	434lm	98°	83	⊕ 200-240V~ 50Hz	0.90	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- LED driver certified by Intertek







ZH1142

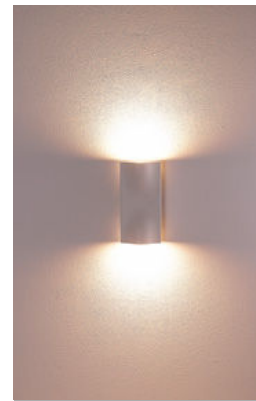

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/014/1142	2x7W CREE	3000K	811lm	98°	83	⊕ 200-240V~ 50Hz	0.9	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- LED driver certified by Intertek

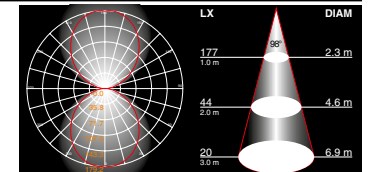





ZH5811



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/010/5811	10x1W CREE	3000K	422lm	360°	84	200-240V~ 50Hz	0.86	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek

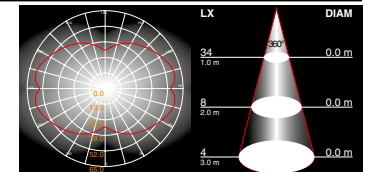

Cover



Wall light



ZH1502





ZH1501



Item No.	Watt(18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/1501	24x0.75W SMD	3000K	300lm	360°	83	200-240V~ 50Hz	0.98	IP54

- ▲ H1502: E27 max.2x15 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- AC LED, without driver



ISO





ZH1551



Item No.	Watt(15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1551	86x0.17W SMD	3000K	893lm	131°	85	200-240V~ 50Hz	0.94	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- AC LED, without driver



Spoiler





ZH1571



Item No.	Watt(15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1571	24x0.6W SMD	3000K	1031lm	72°	83	⊕ 200-240V~ 50Hz	0.97	IP54 ⚡ ⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- AC LED, without driver






ZH1461



- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- ⚡ 220V-240V~ 50Hz
- 💡 E27 max.15 Watt
- IP54 ⚡ ⚠



MOBI

Wall light



ZH5642




ZH5643




Movement Grid

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- Reflector made of oxidized aluminium
- ⚡ 220V-240V~ 50Hz
- 🔌 E27 max.2x15 Watt
- IP54



ZH5642




ZH5643




ZH5701

ZH5704

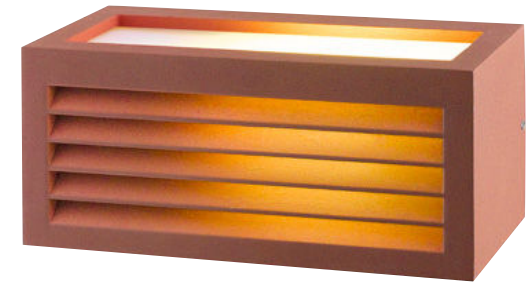


ZH5703

ZH5706




ZH5704



ZH5706


Item No.	Watt (18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/5704	86x0.2W SMD	3000K	371lm	112°	83	⊕ 200-240V~ 50Hz	0.99	IP54 ⚠
ZH/018/5706	86x0.2W SMD	3000K	396lm	112°	83	⊕ 200-240V~ 50Hz	0.99	IP54 ⚠

- ▲ 5701/5703: E27 max.18 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver



ZH5701

ZH5704



ZH5703


ZH5706



ZH5702





ZH5705

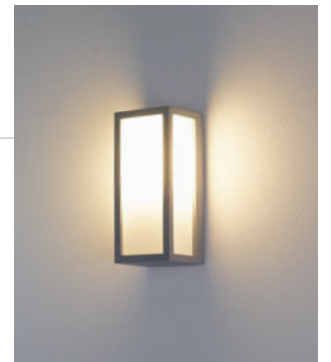


Item No.	Watt(18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/5705	86x0.2W SMD	3000K	662lm	112°	83	⊕ 200-240V~ 50Hz	0.99	IP54

- ▲ 5702: E27 max. 18 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver

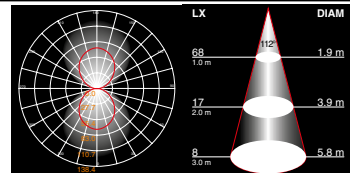





ZH2661




Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2661	1x7W CREE	3000K	275lm	120°	83	⊕ 200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- LED driver certified by Intertek

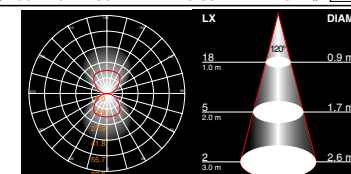





ZH1581



Item No.	Watt(9W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/1581	12x0.75W SMD	3000K	411lm	107°	86	⊕ 200-240V~ 50Hz	0.98	IP54 ⚡

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- AC LED, without driver



Card



Wall light





ZH1341



Item No.	Watt (15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1341	88x0.17W SMD	3000K	1088lm	108°	83	⊕ 200-240V~ 50Hz	0.93	IP54 ⚡

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver








ZH1511




Item No.	Watt(15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1511	88x0.17W SMD	3000K	1036lm	110°	85	200-240V~ 50Hz	0.97	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver




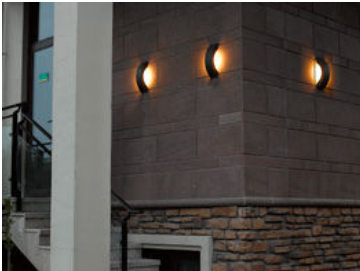


ZH2671

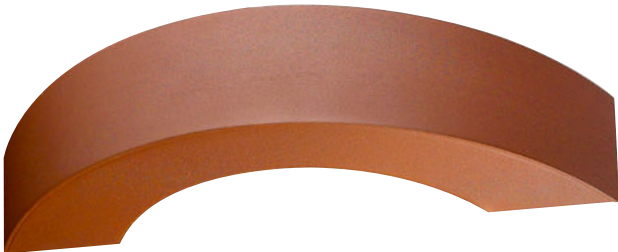


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2671	3x3W CREE	3000K	238lm	100°	85	⊕ 200-240V~ 50Hz	0.79	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek







ZH2811

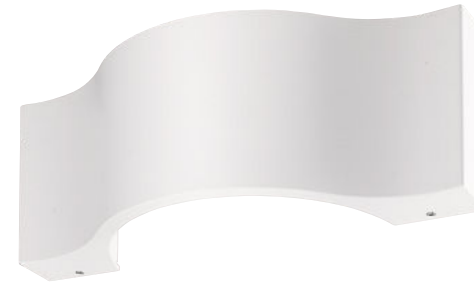


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2811	1x7W CREE	3000K	457lm	100°	82	200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek

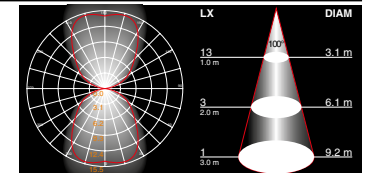






ZH2631





Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/012/2631	4x3W CREE	3000K	385lm	102°	80	⊕ 200-240V~ 50Hz	0.85	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

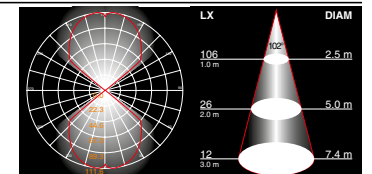





ZH2891

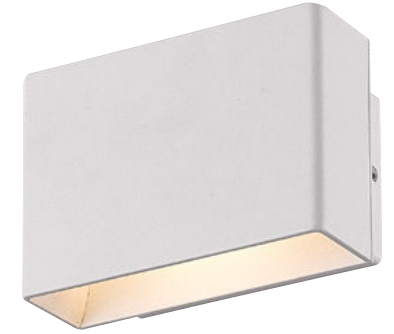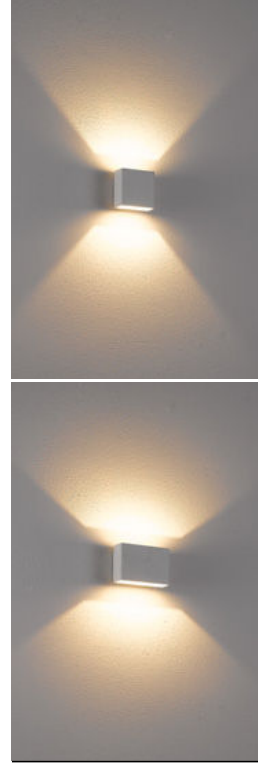

ZH2892




ZH2891




ZH2892

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/005/2891	1x5W	3000K	158lm	96°	85	⊕ 200-240V~ 50Hz	0.9	IP54
ZH/005/2892	1x5W	3000K	173lm	107°	85	⊕ 200-240V~ 50Hz	0.9	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- AC LED, without driver



ZH2891



ZH2892





ZH2553




Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2553	2x4.5W CREE	3000K	105lm	15°/78°	80	⊕ 200-240V~ 50Hz	0.93	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

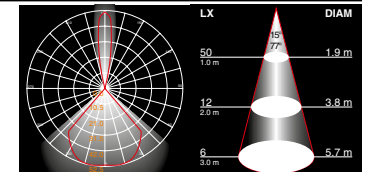






ZH2691



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2691	1x7W CREE	3000K	344lm	108°	82	⊕ 200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- LED driver certified by Intertek

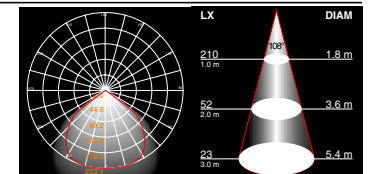


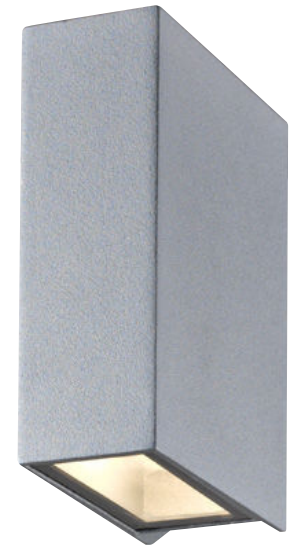



ZH2563



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2563	2x4.5W CREE	3000K	210lm	50°	78	⊕ 200-240V~ 50Hz	0.92	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

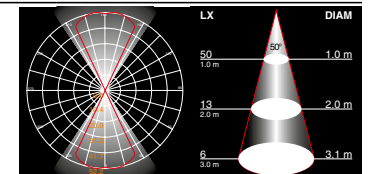


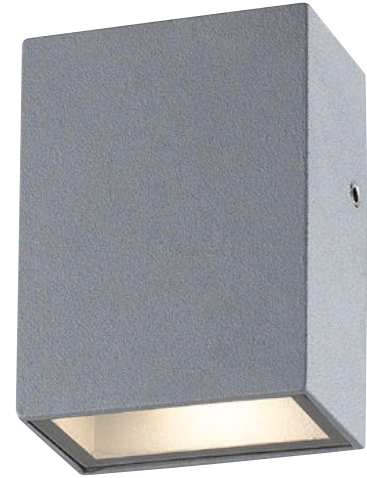




ZH2562



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/2562	1x3W CREE	3000K	68lm	101°	101	⊕ 200-240V~ 50Hz	0.53	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

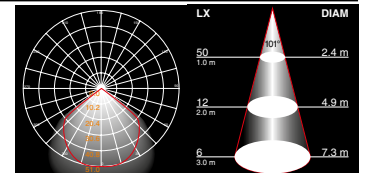

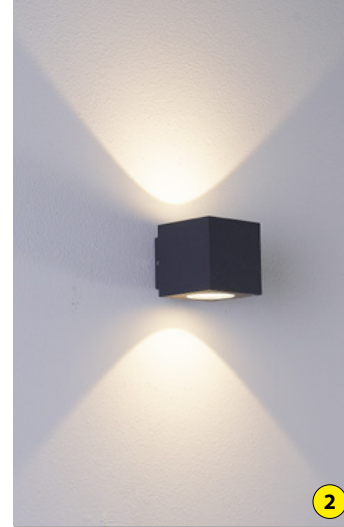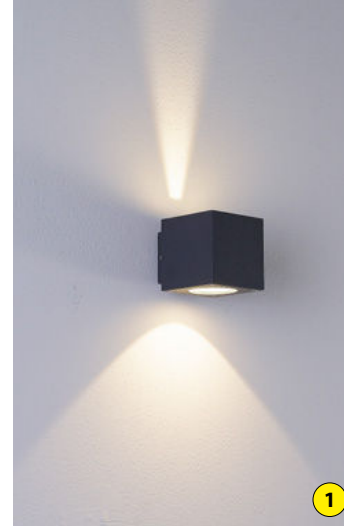

ZH2613






Spare reflector, fixed or unfixed reflector can have different light effect

1 reflector included **2** reflector excluded


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2613	2x4.5W CREE	3000K	285lm	22°/90°	78	⊕ 200-240V~ 50Hz	0.93	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- Reflector included
- LED driver certified by Intertek

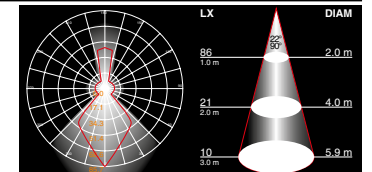





ZH2621



ZH2622

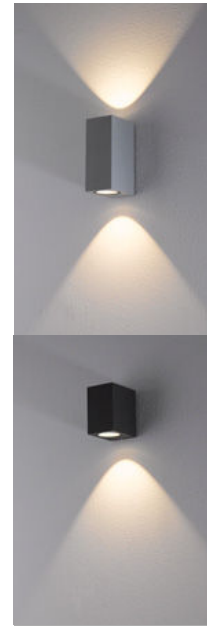


ZH2622

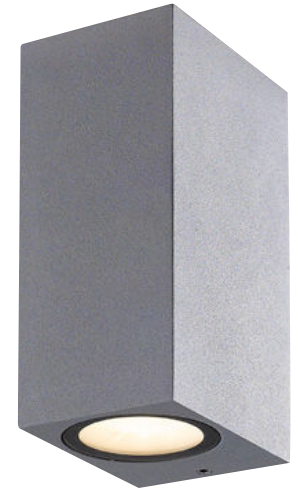


ZH2621

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/014/2621 2x7W	CREE	3000K	928lm	73°	82	⊕ 200-240V~ 50Hz	0.93	IP54 ⚠
ZH/007/2622 1x7W	CREE	3000K	519lm	72°	82	⊕ 200-240V~ 50Hz	0.88	IP54 ⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



ZH2621





ZH2622




ZH2473



ZH2474




ZH2473




ZH2474

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/2473 1x3W CREE		3000K	85lm	86°	82	⊕ 200-240V~ 50Hz	0.5	IP54
ZH/006/2474 2x3W CREE		3000K	160lm	87°	82	⊕ 200-240V~ 50Hz	0.53	IP54


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek




ZH2473



ZH2474



ZH2871



ZH2872




ZH2871



ZH2872


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2871	1x7W CREE	3000K	353lm	18°	82	⊕ 200-240V~ 50Hz	0.88	IP54 ⚠ ⚡
ZH/006/2872	3x2W CREE	3000K	218lm	24°	80	⊕ 200-240V~ 50Hz	0.82	IP54 ⚠ ⚡

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek








ZH1241

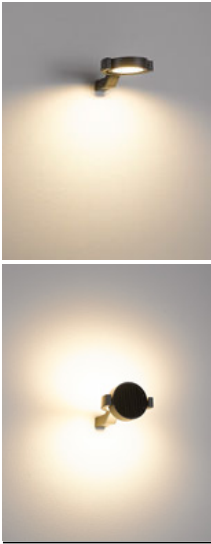


Item No.	Watt (15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1241	56x0.27W SMD	3000K	940lm	107°	83	⊕ 200-240V~ 50Hz	0.99	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver




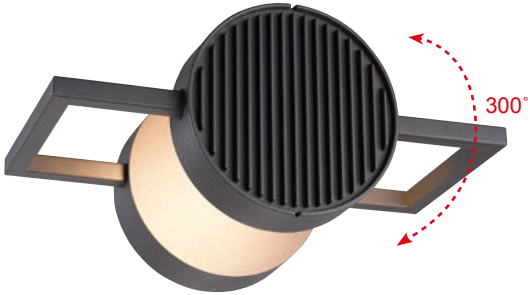


ZH1251

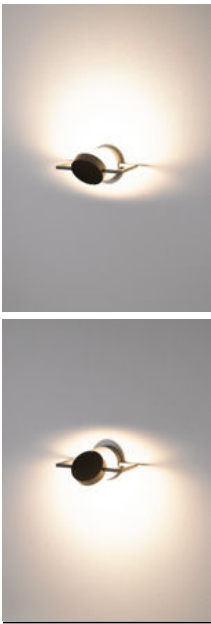

Item No.	Watt (15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1251	56x0.27W SMD	3000K	739lm	105°	83	⊕ 200-240V~ 50Hz	0.99	IP54



- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver



Swing





ZH1151




Item No.	Watt (7W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/1151	48x0.15W SMD	3000K	339m	112°	82	⊕ 200-240V~ 50Hz	0.88	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

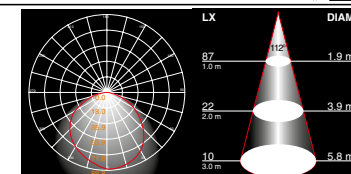









ZH1152



Item No.	Watt (14W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/014/1152	96x0.15W SMD	3000K	491lm	111°	82	⊕ 200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

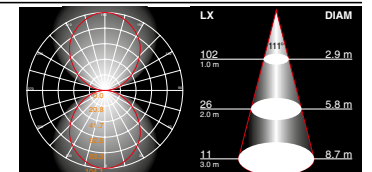



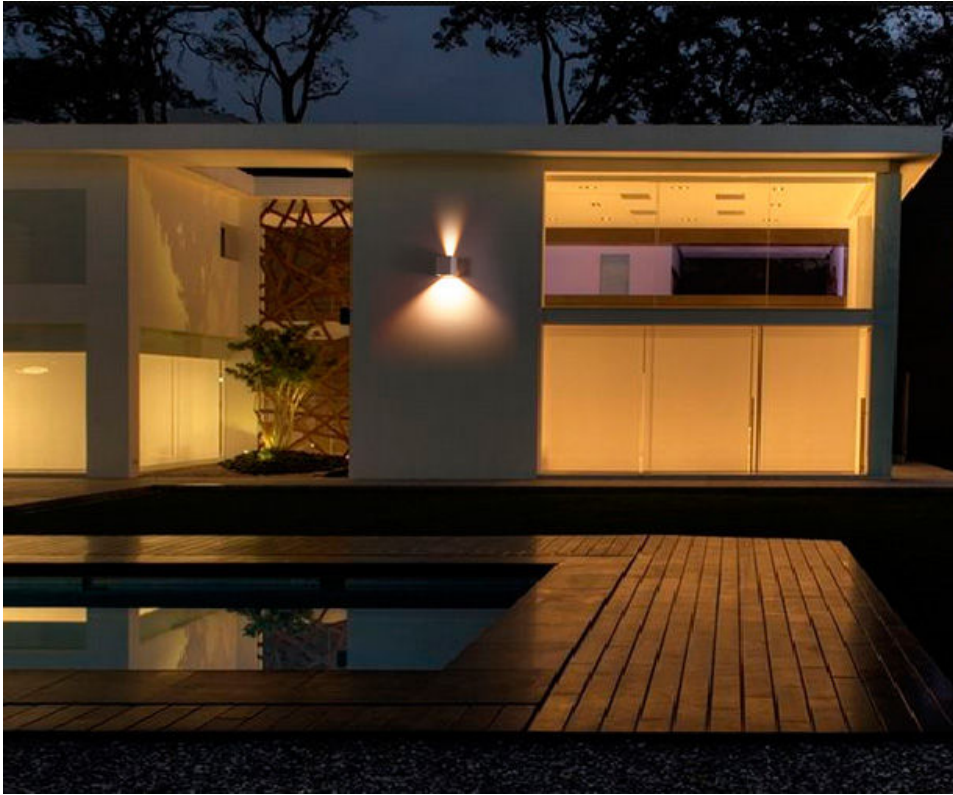


ZH2542

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/010/2542	2x5W CREE	3000K	816lm	104°	82	⊕ 200-240V~ 50Hz	0.9	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

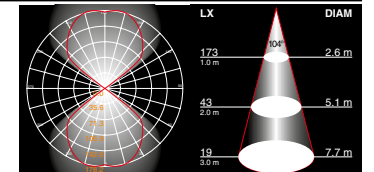





ZH2541


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/012/2541	12x1W	3000K	936lm	24°	81	200-240V~ 50Hz	0.90	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



ZH2541


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- 220V-240V~ 50Hz
- GX53 max.2x11 Watt
- IP54





ZH2541

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- Reflector included
- ⚡ 220V-240V~ 50Hz
- G9 max.40 Watt
- IP54



ZH2541





Spare reflector, fixed or unfixed reflector can have different light effect

1 reflector included

2 reflector excluded

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/014/2541	2x7W CREE	3000K	705lm	21°	84	⚡ 200-240V~ 50Hz	0.90	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

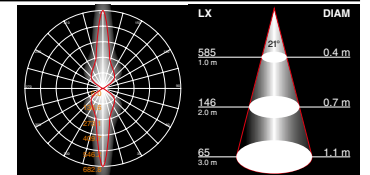

Puck



Wall light





ZH1541

ZH1542



Item No.	Watt(30W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/030/1541	112x0.27W SMD	3000K	1233lm	109°	82	⊕ 200-240V~ 50Hz	0.99	IP54

- ▲ H1542: E27 max.15 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- AC LED, without driver



Nami

Wall light




ZH1531

ZH1532



Item No.	Watt(18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/1531	86x0.2W SMD	3000K	864lm	55°	84	200-240V~ 50Hz	0.93	IP54

- ▲ H1532: E27 max.15 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- AC LED, without driver







ZH2841



ZH2851

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/014/2841-2851	2x7W CREE	3000K	890lm	37°	82	⊕200-240V~ 50Hz	0.92	IP54

- Body and bracket in extrusion aluminium
- Brushed anodised for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

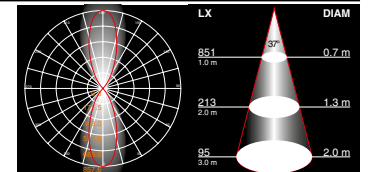



ZH2213





ZH2223




ZH2214



ZH2224

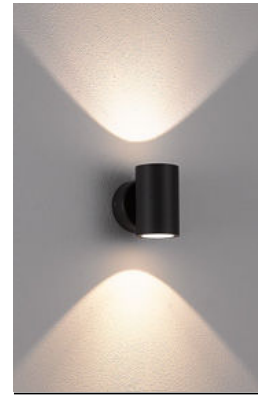


ZH2213




ZH2223

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2213	2x4.5W CREE	3000K	427lm	44°	83	⊕ 200-240V~ 50Hz	0.92	IP54
ZH/005/2214	1x4.5W CREE	3000K	200lm	36°	82	⊕ 200-240V~ 50Hz	0.81	IP54
ZH/009/2223	2x4.5W CREE	3000K	373lm	44°	83	⊕ 200-240V~ 50Hz	0.93	IP54
ZH/005/2224	1x4.5W CREE	3000K	193lm	38°	81	⊕ 200-240V~ 50Hz	0.82	IP54


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek




ZH2213




ZH2214



ZH2223



ZH2224

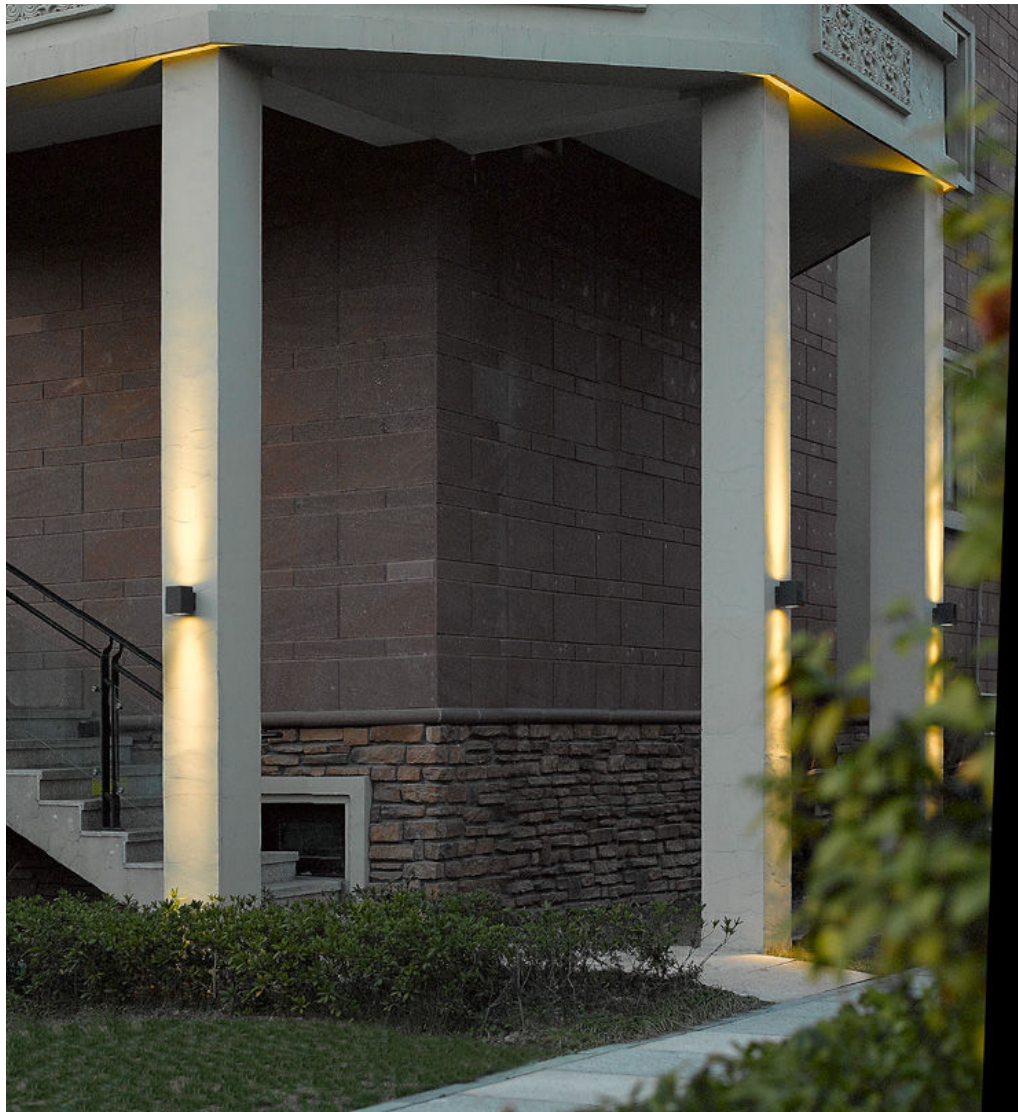

Wall light



ZH2233




ZH2383




ZH2234



ZH2384




ZH2233




ZH2383

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/014/2233	2x7W CREE	3000K	719lm	23°	81	⊕ 200-240V~ 50Hz	0.91	IP54
ZH/007/2234	1x7W CREE	3000K	360lm	25°	81	⊕ 200-240V~ 50Hz	0.53	IP54
ZH/014/2383	2x7W CREE	3000K	839lm	21°	82	⊕ 200-240V~ 50Hz	0.92	IP54
ZH/007/2384	1x7W CREE	3000K	541lm	25°	82	⊕ 200-240V~ 50Hz	0.53	IP54


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek




ZH2233



ZH2234



ZH2383



ZH2384






ZH2571





Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH//06/2571	2x3W CREE	3000K	261lm	30°	82	⊕ 200-240V~ 50Hz	0.53	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

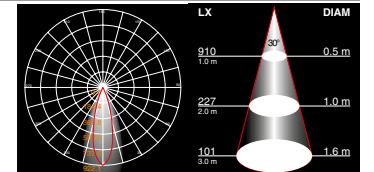

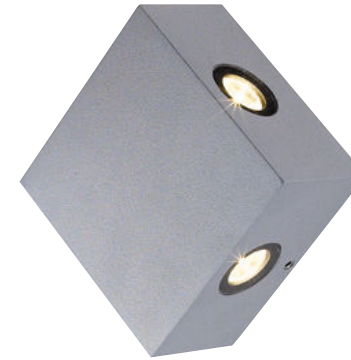

ZH2441

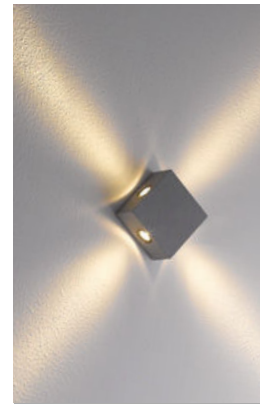

ZH2442

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/004/2441	4x1W CREE	3000K	321lm	11°	80	⊕ 200-240V~ 50Hz	0.53	IP54


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



2441A-LED



2442A-LED

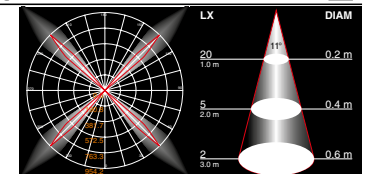

Wave

Wall & post light



Nature prefers soft, curved, circular shapes.


A wave from the wall. Wave was born elegant and discreet, waterproof and dustproof. Therefore suitable for illumination outdoor spaces. Due to its shape, it does not dazzle, but it spreads its light just where you need it.




ZH5621



- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- Reflector made of oxidized aluminium
- ⚡ 220V-240V~ 50Hz
- 🔌 E27 max. 2x15 Watt
- IP54




Wave mini

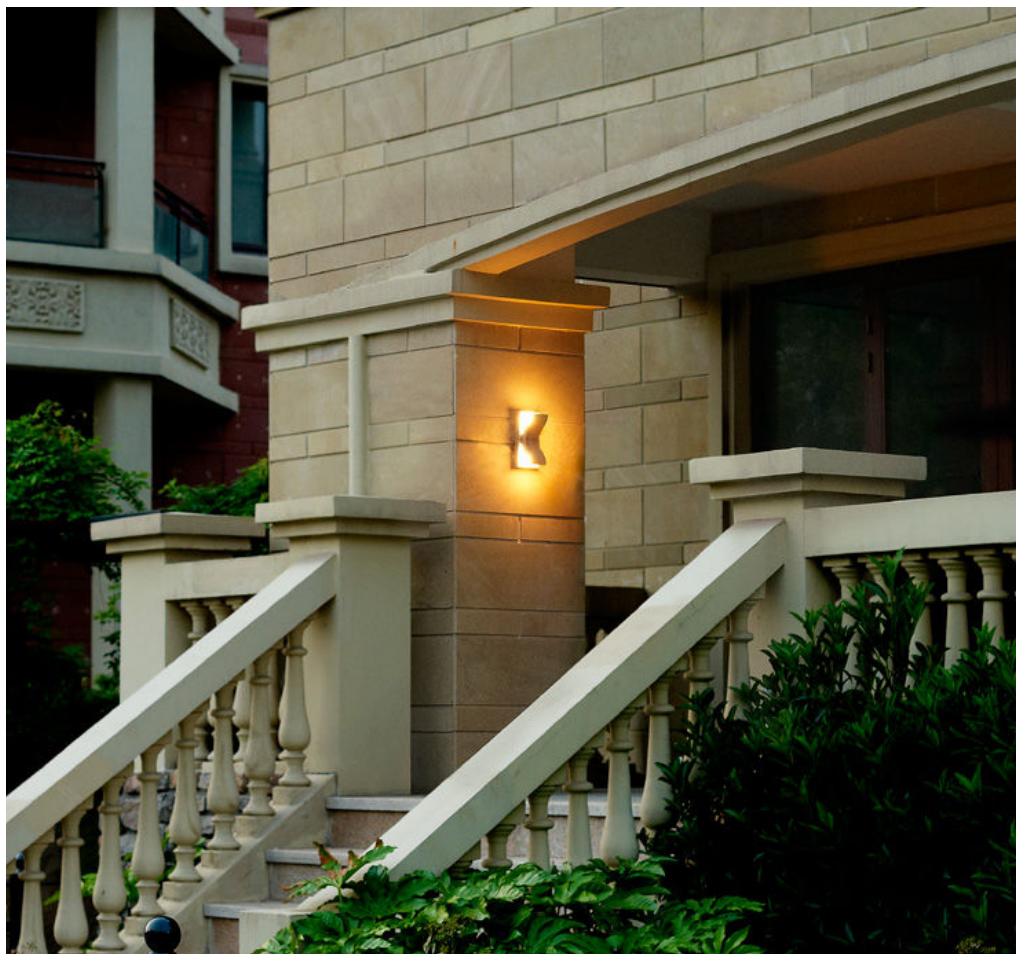

There is also the small version, Wave mini, particularly suitable for stairs and walkways. Wave mini gives his best when paired adjacent, one pointing up and one down. With this setup the basic concept of wave is highlighted and strengthened, creating a complete lighting source. This arrangement will grant a 360° light diffusion with an up-down issue.

Wave mini exists in two versions: G9 light bulbs version or the new LEDs version.

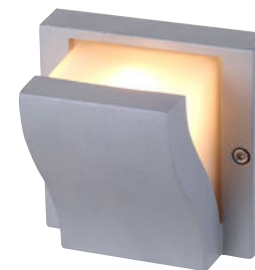



ZH5631




ZH5631

Item No.	Watt (7W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/5631	12x0.58W SMD	3000K	174lm	197°	83	⊕ 200-240V~ 50Hz	0.99	IP54


- ▲ 5631:  G9 max.40 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- AC LED, without driver

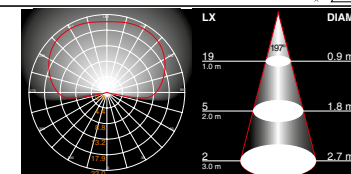

Pictus mini





ZH5671



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/5671	3x1W	3000K	119lm	201°	80	⊕ 200-240V~ 50Hz	0.53	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- LED driver certified by Intertek



Pictus mini pole



Wall & post light





ZH5673



Item No.	Watt		Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/5673	3x1W		3000K	117lm	37°	80	⊕ 200-240V~ 50Hz	0.53	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- LED driver certified by Intertek



Eclissi Ground



Wall & post light





ZH5731



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/010/5731	10x1W 	3000K	364lm	360°	80	200-240V~ 50Hz	0.92	IP54 

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek





Wall & post light





ZH5733-220




ZH5733-750

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/010/5733	10x1W	3000K	253lm	197°	81	200-240V~ 50Hz	0.92	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek

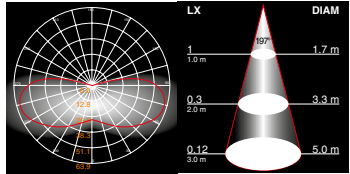

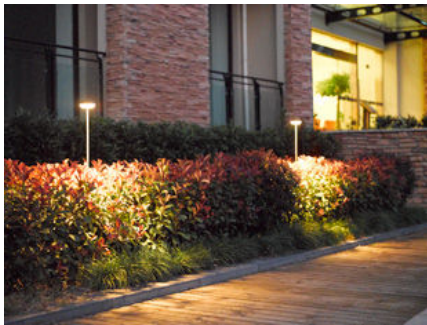



Wall & post light



ZH5743-750										ZH5743									
Item No.	Watt		Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type	Item No.	Watt		Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/006/5743	6x1W	CREE	3000K	467lm	36°	81	⊕ 200-240V~ 50Hz	0.53	IP54	ZH/006/5743	6x1W	CREE	3000K	467lm	36°	81	⊕ 200-240V~ 50Hz	0.53	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- LED driver certified by Intertek


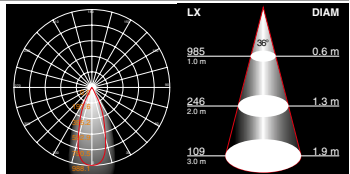


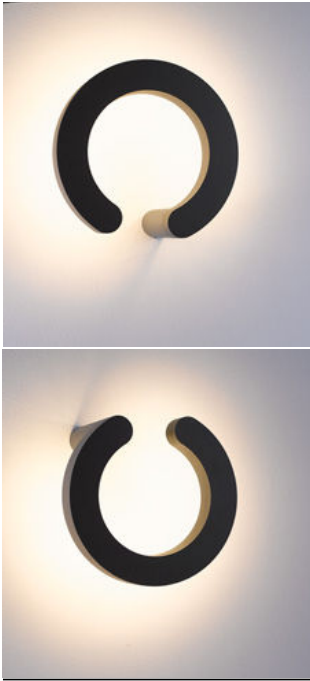

ZH5711


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/006/5711	6x1W CREE	3000K	229lm	360°	85	⊕ 200-240V~ 50Hz	0.53	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek



Curvus








ZH5713-2200



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/024/5713	12x2W 	3000K	732lm	54°	81	200-240V~ 50Hz	0.94	IP54 



- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek

Mira big





Wall & post light

ZH5845-2200



Item No.	Watt (36W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/036/5845	172x0.2W SMD	3000K	1104lm	110°	84	⊕ 200-240V~ 50Hz	0.99	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver







ZH5844-900


Item No.	Watt (18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/5844	86x0.21W SMD	3000K	511lm	107°	83	⊕ 200-240V~ 50Hz	0.99	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver







ZH1111

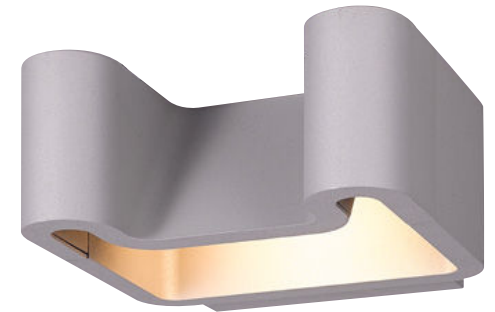

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/1111	1x7W CREE	3000K	172lm	57°	84	⊕ 200-240V~ 50Hz	0.89	IP65


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek

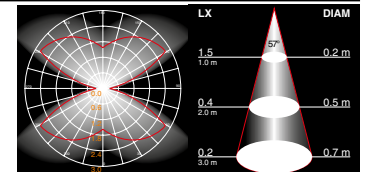

Tape





Wall & post light

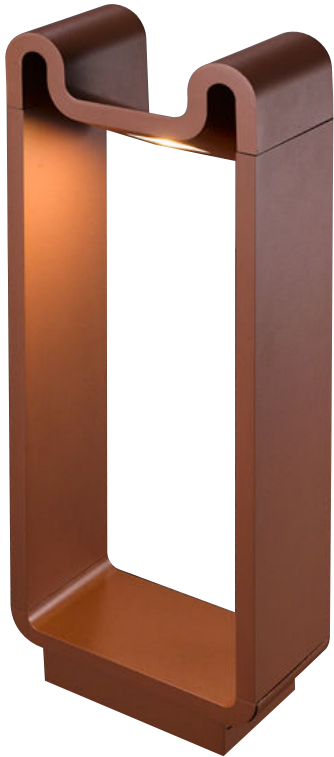

ZH1112

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/1112	1x7W	3000K	198lm	74°	84	⊕ 200-240V~ 50Hz	0.89	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek

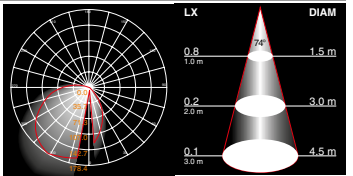





ZH1351



Item No.	Watt(18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/1351	24x0.75W SMD	3000K	570lm	28°	83	⊕ 200-240V~ 50Hz	0.99	IP65 

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- AC LED, without driver






Wall & post light






ZH2721




Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2721	1x7W CREE	3000K	448lm	40°	82	200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek




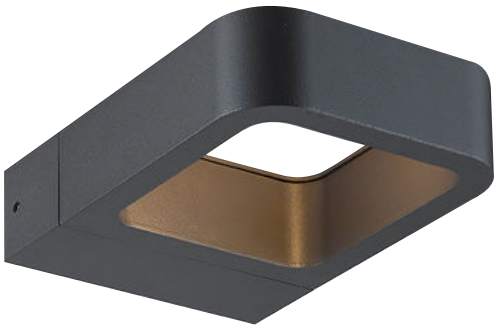



ZH2722

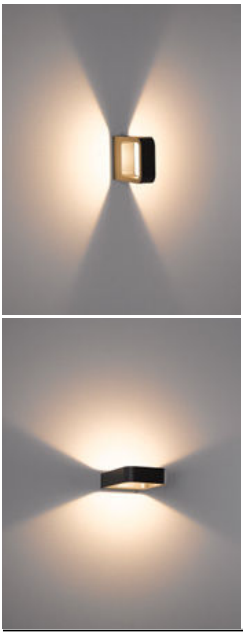


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2722	1x7W CREE	3000K	290lm	160°	82	200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek




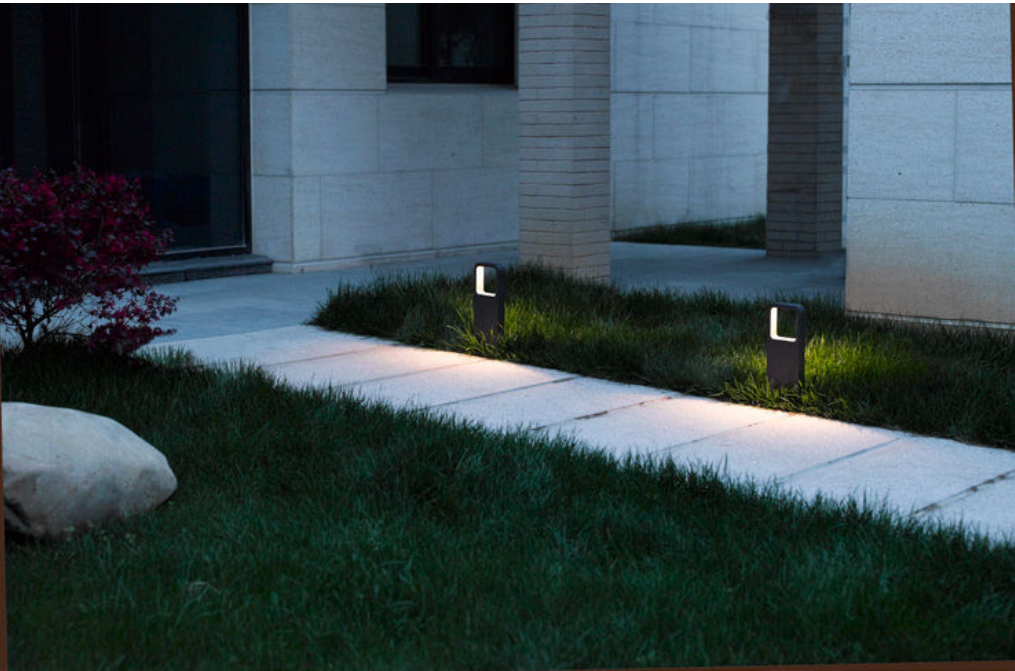

Wall & post light

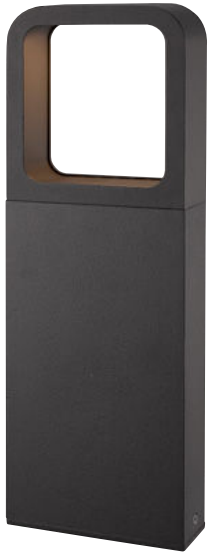



ZH2723-350

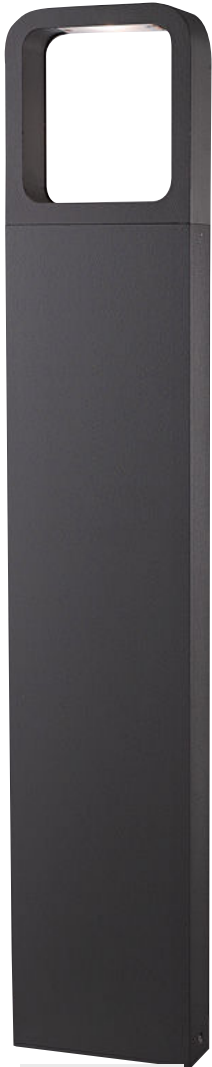

ZH2723-650

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/07/2723	1x7W	3000K	290lm	45°	82	200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek







ZH1202



ZH1201

Item No.	Watt (7W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/1201-02	24x0.25 SMD	3000K	218lm	49°	82	⊕ 200-240V~ 50Hz	0.5	IP54 ⚡ ⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- LED driver certified by Intertek





Wall & post light





ZH2835



Item No.	Watt (8W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/008/2835	12x0.7W SMD	3000K	389lm	120°	83	⊕ 200-240V~ 50Hz	0.99	IP54 ⚡

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- AC LED, without driver





Wall & post light





ZH2834



ZH2836

Item No.	Watt (8W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/008/2834	12x0.7W SMD	3000K	367lm	106°	82	200-240V~ 50Hz	0.99	IP54



- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- AC LED, without driver





Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2492A	3x3W CREE	3000K	209lm	88°	80	⊕ 200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek






Wall & post light




ZH2491

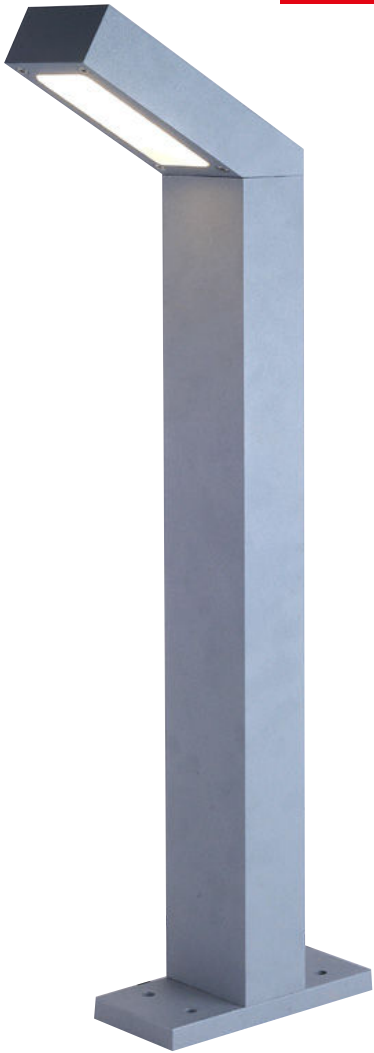

ZH2493-650


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2491-93	3x3W	3000K	169lm	79°	79	200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek



2491A-LED

2493ALED-650






ZH2501




ZH2504



ZH2505




2504-COB




2505-COB


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2504	1x7W CREE	3000K	440lm	19°	81	⊕ 200-240V~ 50Hz	0.90	IP54
ZH/007/2505	1x7W CREE	3000K	538lm	25°	82	⊕ 200-240V~ 50Hz	0.89	IP54

- ▲ 2501: GX53 max.11Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek





2506COB-750



2507COB-750




ZH2506-750

ZH2507-750

ZH2503-750

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2506	1x7W CREE	3000K	440lm	25°	81	⊕ 200-240V~ 50Hz	0.90	IP54 ⚠
ZH/007/2507	1x7W CREE	3000K	538lm	25°	82	⊕ 200-240V~ 50Hz	0.89	IP54 ⚠

- ▲ 2503A-750: GX53 max. 11Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek






ZH1171

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/1171	1x7W CREE	3000K	278lm	33°	82	⊕ 200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek





Bandy



ZH1401-400

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/004/1401	1x4W CREE	3000K	317lm	70°	84	200-240V~ 50Hz	0.53	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- LED driver certified by Intertek





Wall & post light






ZH2713-250



ZH2713-650


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2713	1x7W CREE	3000K	139lm	36°	83	200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- LED driver certified by Intertek



ZH2713-250


ZH2713-650

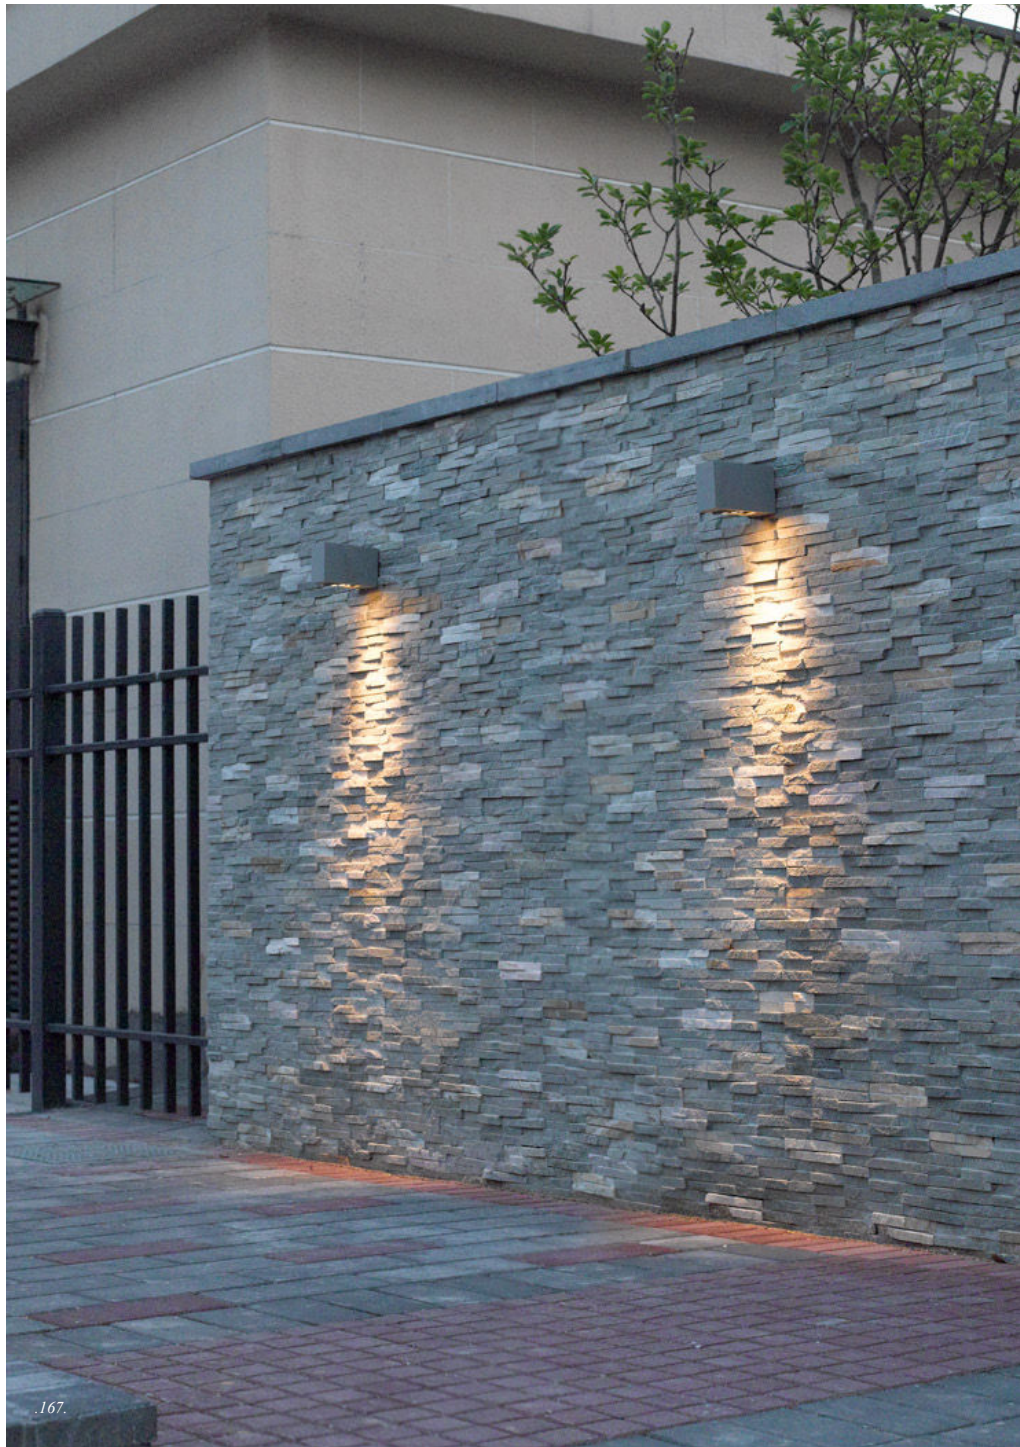

Wall & post light





ZH2731

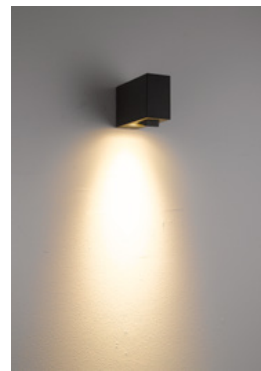

Item No.	Watt		Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2731	3x3W		3000K	259lm	27°	79	⊕ 200-240V~ 50Hz	0.8	IP54


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

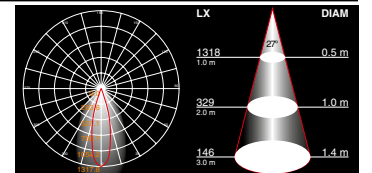



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2733	3x3W	3000K	259lm	27°	79	⊕ 200-240V~ 50Hz	0.8	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek







Wall & post light



ZH2753-650

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/2753	3x3W	3000K	95lm	70°	80	⊕ 200-240V~ 50Hz	0.81	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek






Wall & post light




ZH5853-400

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/5853	1x7W CREE	3000K	303lm	50°	82	200-240V~ 50Hz	0.89	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- LED driver certified by Intertek




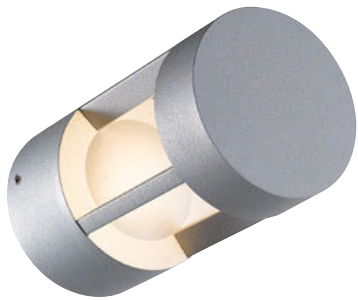

ZH8441




ZH8443-200




Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/8441	1x7W CREE	3000K	359lm	40°	82	⊕ 200-240V~ 50Hz	0.89	IP54 ⚠
ZH/007/8443	1x7W CREE	3000K	397lm	41°	82	⊕ 200-240V~ 50Hz	0.89	IP54 ⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



ZH8441



ZH8443-200





Wall & post light




ZH8443-650


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/8443	1x7W CREE	3000K	397lm	41°	82	⊕ 200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Convex glass
- Silicon rubber gasket
- LED driver certified by Intertek






ZH8451

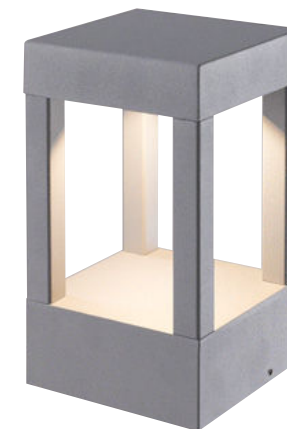


ZH8453-200




Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/8451	1x7W CREE	3000K	353lm	36°	82	⊕ 200-240V~ 50Hz	0.89	IP54
ZH/007/8453	1x7W CREE	3000K	400lm	38°	82	⊕ 200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



ZH8451



ZH8453-200





Wall & post light




ZH8453-650

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/8453	1x7W CREE	3000K	442lm	44°	82	⊕ 200-240V~ 50Hz	0.89	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Convex glass
- Silicon rubber gasket
- LED driver certified by Intertek




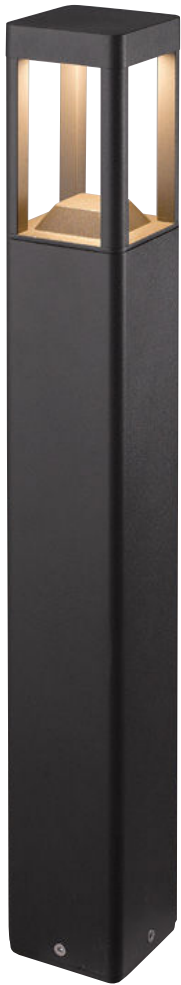


ZH8456-600

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/8456	1x7W CREE	3000K	412lm	42°	87	⊕ 200-240V~ 50Hz	0.9	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



8456LED-600







ZH8455-600

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/8455	1x7W	3000K	258lm	41°	86	⊕ 200-240V~ 50Hz	0.9	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



8455LED-600






Wall & post light



ZH8461







ZH8463

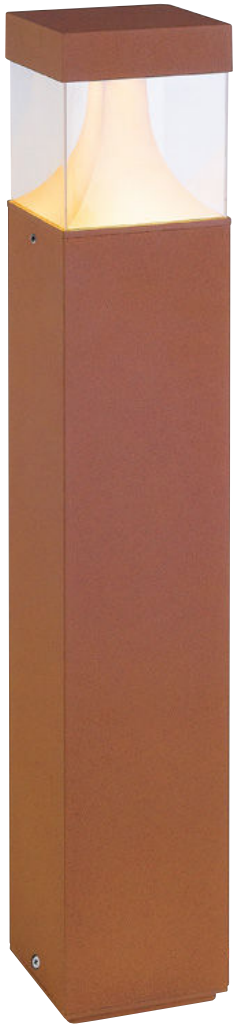

ZH8463-650

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/012/8461	4x3W CREE	3000K	112lm	15°	79	⊕ 200-240V~ 50Hz	0.84	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- LED driver certified by Intertek







ZH8431
ZH8432



Item No.	Watt (15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/8432	86x0.17W SMD	3000K	461lm	270°	84	⊕ 200-240V~ 50Hz	0.99	IP54 ⚡ ⚠

- ▲ 8431:  E27 max.20 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver








ZH8433-265
ZH8434-265



ZH8433-650
ZH8434-650

Item No.	Watt (15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/8434	86x0.17W SMD	3000K	461lm	270°	84	⊕ 200-240V~ 50Hz	0.99	IP54

- ▲ 8433-265/650: E27 max.20 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver



Follow me





Wall & post light



ZH1222
ZH1232

Item No.	Watt (18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/1222	86x0.2W SMD	3000K	737lm	81°	84	⊕ 200-240V~ 50Hz	0.93	IP65

- ▲ H1232: E27 max.20 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver



Follow me





ZH1221

ZH1231

Item No.	Watt (18W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/018/1221	86x0.2W SMD	3000K	737lm	81°	84	⊕ 200-240V~ 50Hz	0.93	IP65

- ▲ H1231: E27 max.20 Watt
- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Opal PC
- Silicon rubber gasket
- AC LED, without driver





Wall & post light



ZH5833-250





ZH5833-600



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/012/5833	6x2W CREE	3000K	230lm	101°	80	24V DC	0.65	IP54


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket



Reflex




Wall & post light

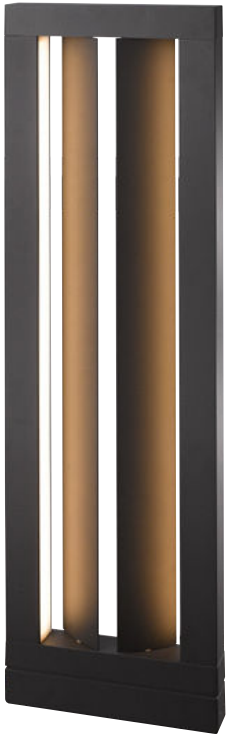

ZH1431-900




ZH1431-1350



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/024/1431	172x0.14W SMD(24W)	3000K	1152lm	101°	85	⊕ 200-240V~ 50Hz	0.94	IP65 ⚠⚠⚠
ZH/036/1431	172x0.21W SMD(36W)	3000K	1500lm	101°	85	⊕ 200-240V~ 50Hz	0.94	IP65 ⚠⚠⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- AC LED, without driver





Oneway



ZH1471-900

Item No.	Watt(16W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/016/1471	20x0.8W SMD	3000K	900lm	35°	83	⊕ 200-240V~ 50Hz	0.89	IP65 

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



Retro



ZH1491-500





ZH1491-720




Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/012/1491	22x0.54W SMD(12W)	3000K	500lm	98°	83	⊕ 200-240V~ 50Hz	0.97	IP65 ⚡⚡⚡
ZH/015/1491	36x0.42W SMD(15W)	3000K	773lm	98°	83	⊕ 200-240V~ 50Hz	0.97	IP65 ⚡⚡⚡

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- AC LED, without driver



Retro

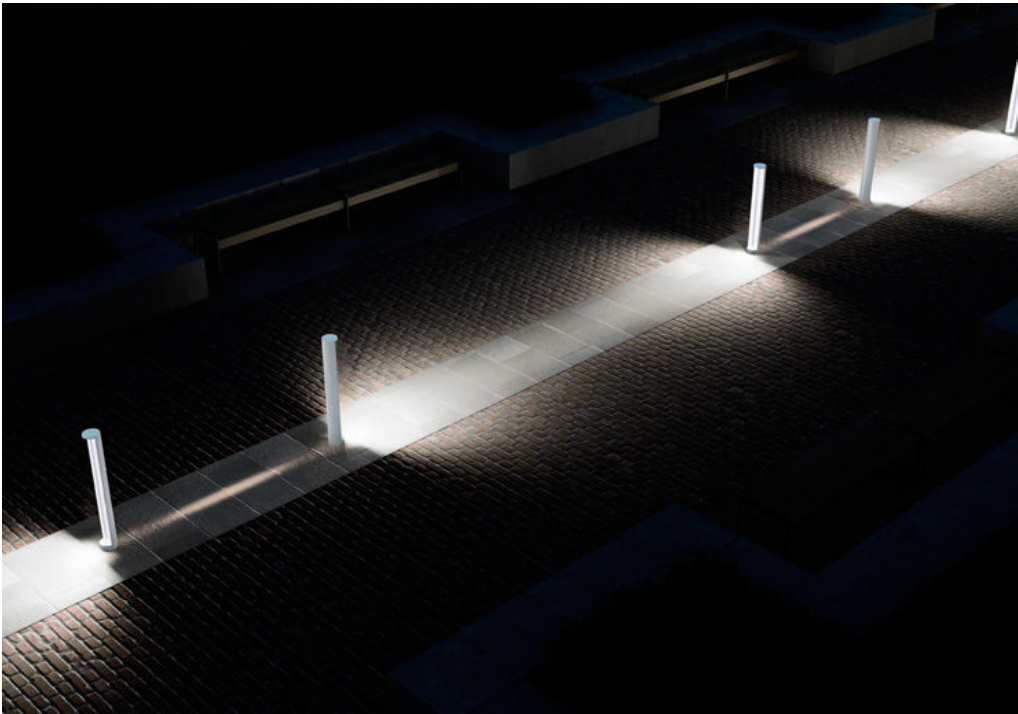


Wall & post light



ZH1481-1320

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/030/1481	72x0.42W SMD(30W)	3000K	1339lm	98°	83	⊕ 200-240V~ 50Hz	0.97	IP65 ⚡ ⚡

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- AC LED, without driver



hugme





Wall & post light



Item No.	Watt (15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1261	56x0.27W SMD	3000K	722lm	46°	84	⊕ 200-240V~ 50Hz	0.93	IP65 

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver

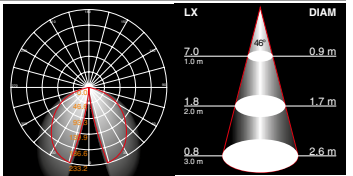



Holdme

Wall & post light



Item No.	Watt (15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1262	56x0.27W SMD	3000K	742lm	58°	84	⊕ 200-240V~ 50Hz	0.93	IP65 ⚡ ⚡

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver





ZH8401

Wall & post light



ZH8403-900

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- Reflector made of oxidized aluminium
- ⚡ 220V-240V~ 50Hz
- 🔌 E27 max.20 Watt
- IP54 ⚡ ⚠



ZH8401



ZH8403-900



Wall & post light



ZH8402





ZH8404 -265



ZH8404-650

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/8402	1x15W	3000K	568lm	52°	82	200-240V~ 50Hz	0.92	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- Reflector made of oxidized aluminium
- LED driver certified by Intertek

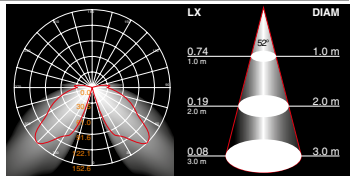




ZH8411



Wall & post light

ZH8413-900

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- Reflector made of stainless steel
- ⚡ 220V-240V~ 50Hz
- 🔌 E27 max.20 Watt
- IP54 ⚡ ⚠



ZH8411



ZH8413-900



Wall & post light



ZH8412



ZH8414



ZH8414

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/8412-14	1x15W	3000K	368lm	82°	82	200-240V~ 50Hz	0.88	IP54

- Body and bracket in die-cast aluminium - Powder coated with pretreatment for outdoor use - Clear PC - Silicon rubber gasket - Reflector made of oxidized aluminium - LED driver certified by Intertek			
--	--	--	--



Regulus




ZH1272

Item No.	Watt (52W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/052/1272	20x2.6W CREE	3000K	2170lm	28°	80	200-240V~ 50Hz	0.89	IP65



- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



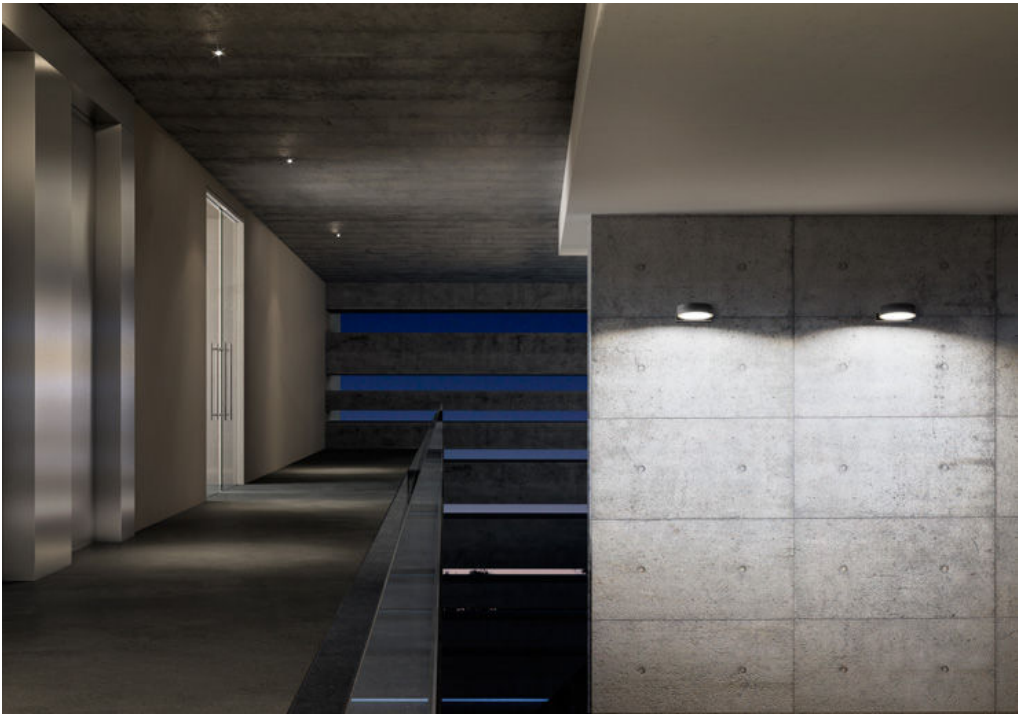


Item No.	Watt (47W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/047/1271	18x2.6W CREE	3000K	1861lm	29°	80	200-240V~ 50Hz	0.89	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

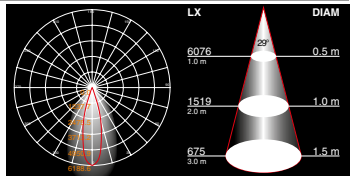





ZH5821

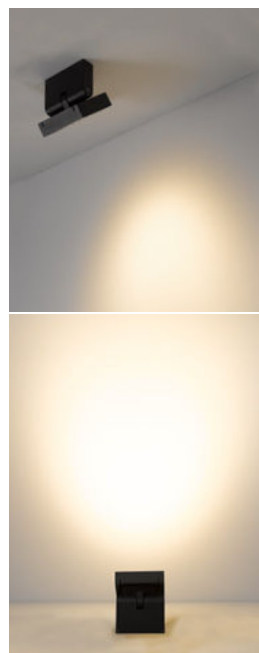


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/016/5821	16x1W CREE	3000K	1001lm	45°	82	200-240V~ 50Hz	0.94	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

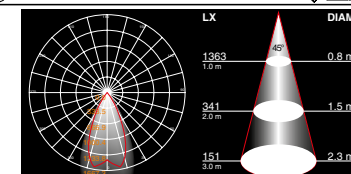




Spot light



ZH1101



ZH1102



ZH1101




ZH1102



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1101	1x15W CREE	3000K	921lm	24°	81	⊕ 200-240V~ 50Hz	0.88	IP65
ZH/024/1102	12x2W CREE	3000K	1000lm	29°	81	⊕ 200-240V~ 50Hz	0.94	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



Phanes





ZH5871



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/012/5871	1x12W CREE	3000K	760lm	41°	82	⊕ 200-240V~ 50Hz	0.86	IP65

- Body and bracket in die-cast aluminium
- Brushed anodised for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek







ZH2741



Plastic spike included


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/008/2741	4x2W CREE	3000K	430lm	27°	83	⊕ 200-240V~ 50Hz	0.77	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

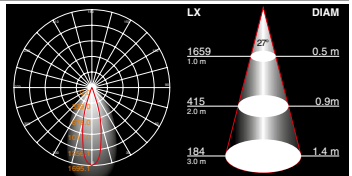





ZH2742



Plastic spike included

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2742	1x7W CREE	3000K	546lm	39°	82	⊕ 200-240V~ 50Hz	0.88	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

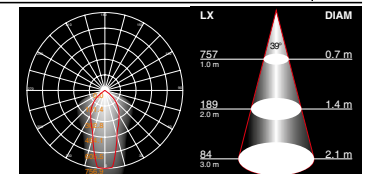





ZH2591



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/006/2591	6x1W CREE	3000K	491lm	25°	80	⊕ 200-240V~ 50Hz	0.89	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek

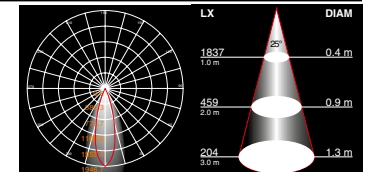




ZH2681

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2681	1x7W CREE	3000K	554lm	95°	82	⊕ 200-240V~ 50Hz	0.89	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek







ZH2861

ZH2863


ZH2862



ZH2861




ZH2862




ZH2863


Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2861	1x7W	3000K	372lm	37°	82	200-240V~ 50Hz	0.54	IP65
ZH/006/2862	3x2W	3000K	240lm	24°	80	200-240V~ 50Hz	0.54	IP65
ZH/015/2863	1x15W	3000K	607lm	45°	81	200-240V~ 50Hz	0.88	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek





ZH2201

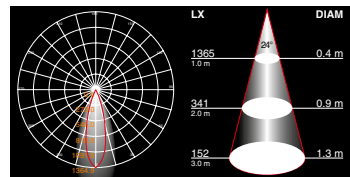

ZH2202




ZH2201

ZH2202

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2201	1x7W CREE	3000K	369lm	39°	82	⊕ 200-240V~ 50Hz	0.89	IP65 ⚠ ⚠ ⚠
ZH/006/2202	3x2W CREE	3000K	280lm	24°	82.5	⊕ 200-240V~ 50Hz	0.88	IP65 ⚠ ⚠ ⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



Marker

Recessed light







ZH1381



Item No.	Watt(7W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/1381	12x0.58W SMD	3000K	208lm	90°	83	⊕ 200-240V~ 50Hz	0.97	IP65 

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- AC LED, without driver



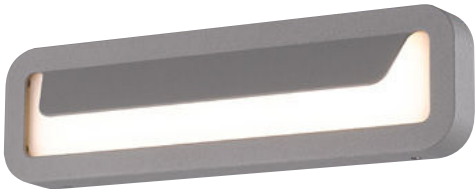
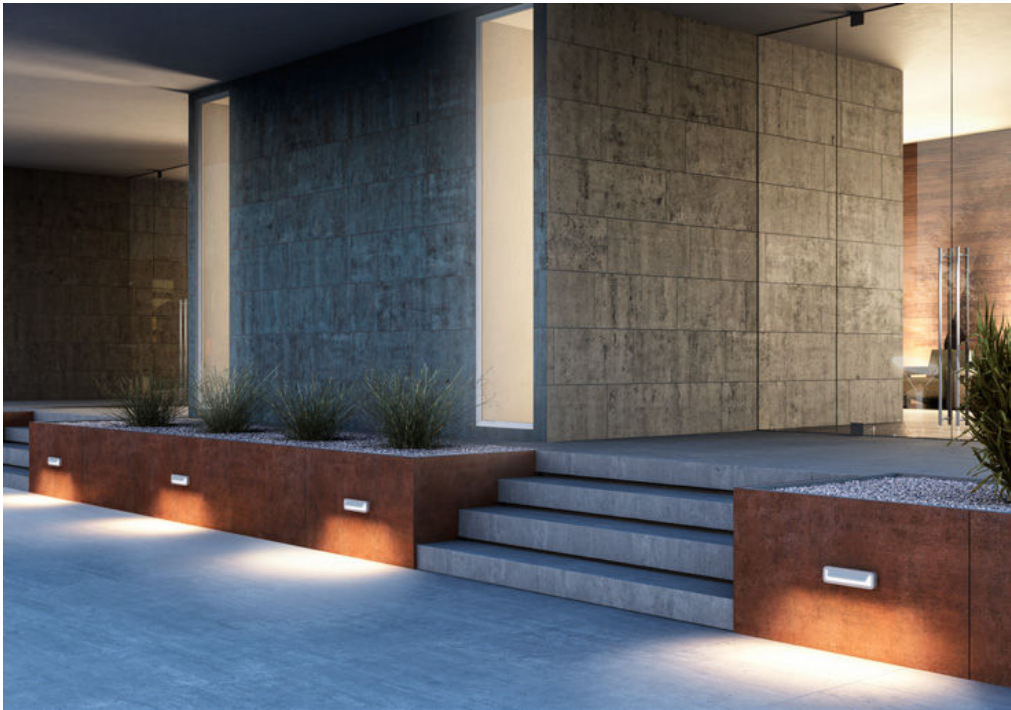


ZH1441



Item No.	Watt(15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1441	86x0.17W SMD	3000K	360lm	74°	82	⊕ 200-240V~ 50Hz	0.99	IP65 

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- AC LED, without driver








ZH2701

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/004/2701	4x1W CREE	3000K	160lm	72°	81	⊕ 200-240V~ 50Hz	0.53	IP54

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost PC
- Silicon rubber gasket
- LED driver certified by Intertek



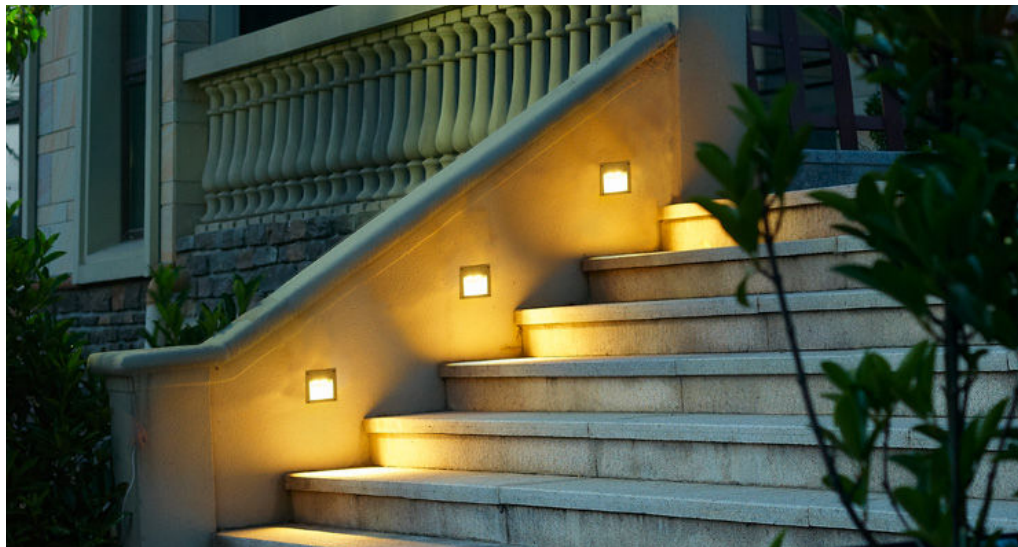


ZH2581




ZH2582




ZH2583



ZH2581




ZH2582




ZH2583

Item No.	Watt		Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/002/2581	2x1W		3000K	169lm	29°	80	⊕ 200-240V~ 50Hz	0.53	IP65
ZH/004/2582	4x1W		3000K	327lm	31°	80	⊕ 200-240V~ 50Hz	0.53	IP65
ZH/006/2583	6x1W		3000K	529lm	29°	80	⊕ 200-240V~ 50Hz	0.53	IP65


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- Recessed plastic box
- LED driver certified by Intertek




ZH2581



ZH2582




ZH2583

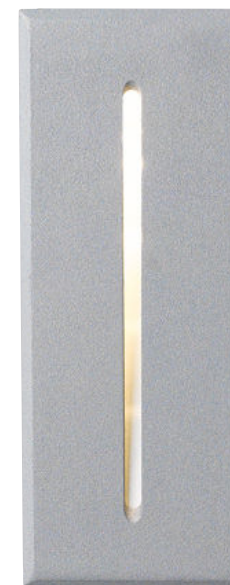

ZH2511






ZH2513

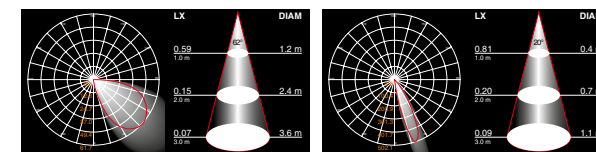

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/2511	1x3W CREE	3000K	8lm	62°	80	⊕ 200-240V~ 50Hz	0.53	IP65
ZH/003/2513	1x3W CREE	3000K	59lm	20°	83	⊕ 200-240V~ 50Hz	0.53	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- Recessed plastic box
- LED driver certified by Intertek




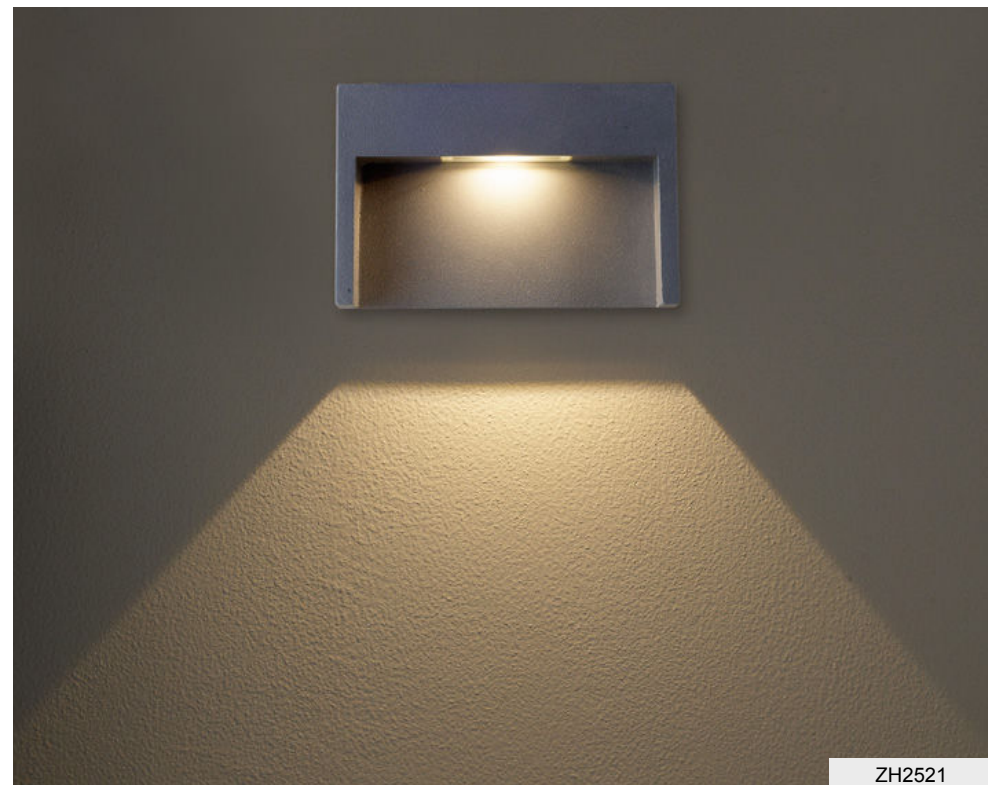


ZH2521



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/03/2521	1x3W CREE	3000K	61lm	84°	77	⊕ 200-240V~ 50Hz	0.53	IP65


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- Recessed plastic box
- LED driver certified by Intertek

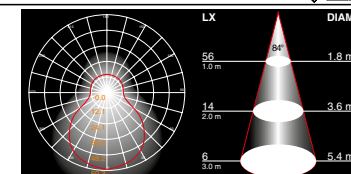


Gyro



Recessed light






ZH1133



Item No.	Watt (3.6W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/004/1133	12x0.3W SMD	3000K	147lm	102°	80	⊕ 200-240V~ 50Hz	0.52	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- Recessed plastic box
- LED driver certified by Intertek

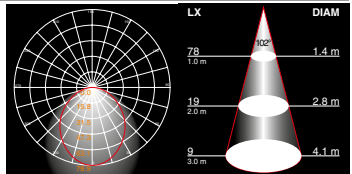


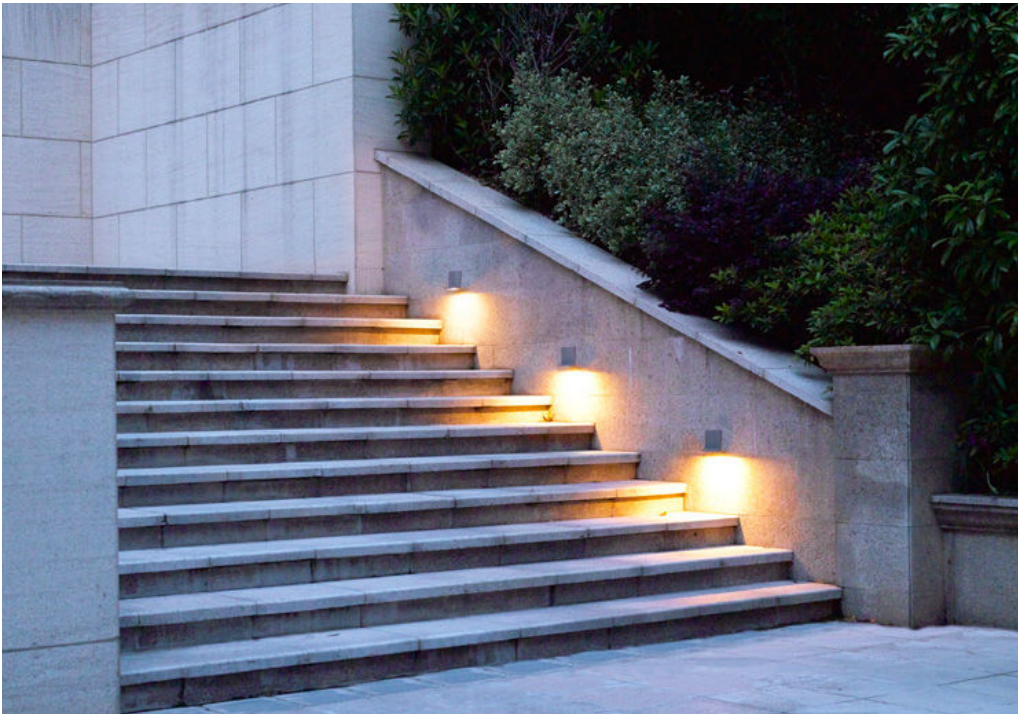


ZH1132




Item No.	Watt (3.6W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/004/1132	12x0.3W SMD	3000K	195lm	96°	80	⊕ 200-240V~ 50Hz	0.53	IP65 

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Frost glass
- Silicon rubber gasket
- Recessed plastic box
- LED driver certified by Intertek





Minus

Recessed light





ZH1131



Item No.	Watt (3.6W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/004/1131	12x0.3W SMD	3000K	46lm	56°	80	⊕ 200-240V~ 50Hz	0.55	IP65

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass + frost PC
- Silicon rubber gasket
- Recessed plastic box
- LED driver certified by Intertek

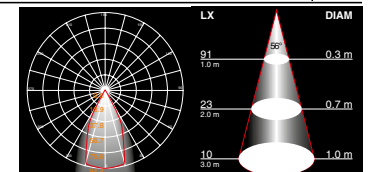


Minima maxi



Recessed light





ZH1123



Item No.	Watt(8.5W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/009/1123	40x0.21W SMD	3000K	190lm	42°	82	⊕ 200-240V~ 50Hz	0.90	IP65 


- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- LED driver certified by Intertek



Minima




Recessed light

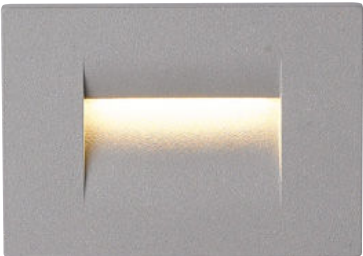


ZH1121



ZH1122





ZH1121





ZH1122

Item No.	Watt (3.6W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/004/1121	12x0.3W SMD	3000K	75lm	33°	80	⊕ 200-240V~ 50Hz	0.56	IP65 ⚠ ⚠ ⚠
ZH/004/1122	12x0.3W SMD	3000K	99lm	48°	80	200-240V~ 50Hz	0.55	IP65 ⚠ ⚠ ⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- Recessed plastic box
- LED driver certified by Intertek




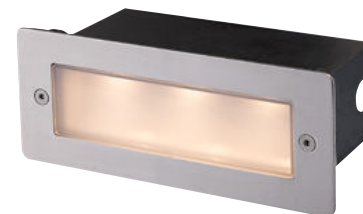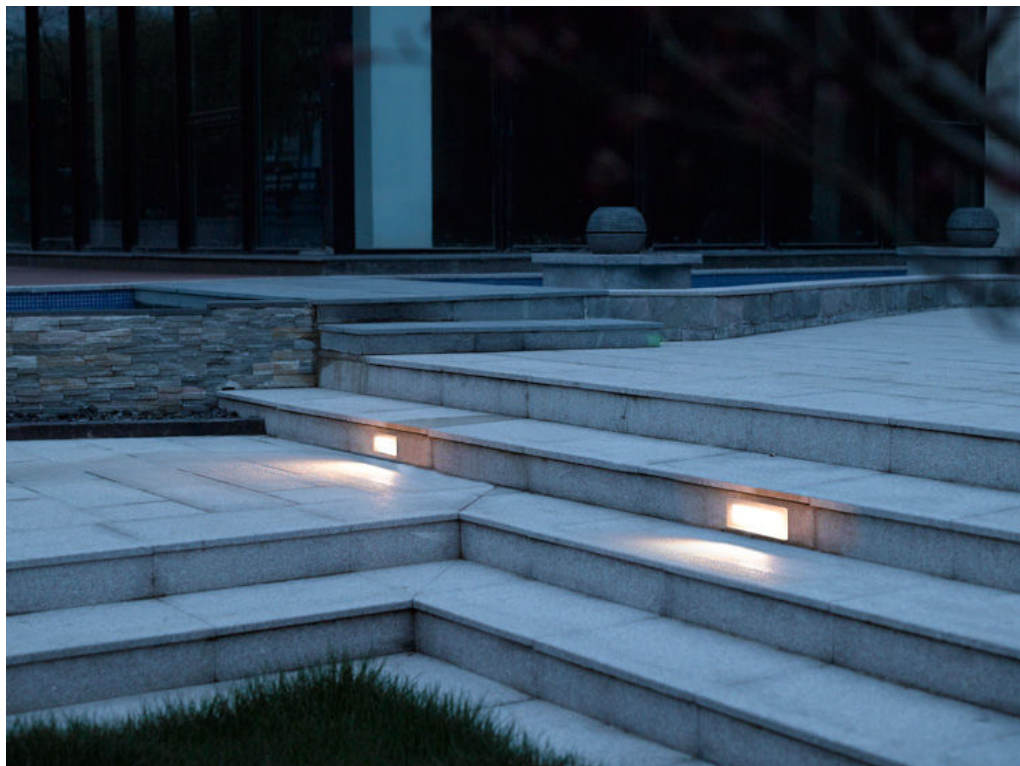


ZH2791



ZH2801




ZH2791

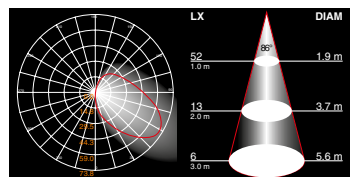


ZH2801

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/2791	3x1W CREE	3000K	89lm	84°	88	⊕ 200-240V~ 50Hz	0.53	IP65
ZH/005/2801	5x1W CREE	3000K	157lm	86°	88	⊕ 200-240V~ 50Hz	0.53	IP65

- 304 grade stainless steel cover, aluminium body
- Frost PC diffuser
- Silicon rubber gasket
- Recessed plastic box
- LED driver certified by Intertek



ZH2791



ZH2801






Recessed light



ZH2771



ZH2772




Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/2771-72	1x3W CREE	3000K	54lm	62°	79	⊕ 200-240V~ 50Hz	0.53	IP65
304 grade stainless steel cover, aluminium body - Clear glass - Silicon rubber gasket - Recessed plastic box - LED driver certified by Intertek								
								
ZH2771		ZH2772						



ZH2781



ZH2782

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/2781-82	1x3W CREE	3000K	23lm	56°	80	⊕ 200-240V~ 50Hz	0.53	IP65
304 grade stainless steel cover, aluminium body - Clear glass - Silicon rubber gasket - Recessed plastic box - LED driver certified by Intertek								
								
ZH2781		ZH2782						

Slot





ZH1282



Item No.	Watt(15W)	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1391	1x15W COB	3000K	616lm	102°	82	⊕ 200-240V~ 50Hz	0.89	IP65 

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek



Dryup



Underground light



ZH1281




ZH1281




ZH1282



ZH1282




ZH1281



ZH1282

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/015/1281	1x15W CREE	3000K	551lm	35°	82	⊕ 200-240V~ 50Hz	0.91	IP65 ⚠⚠⚠
ZH/015/1282	1x15W CREE	3000K	886lm	25°	82	⊕ 200-240V~ 50Hz	0.91	IP65 ⚠⚠⚠

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear glass
- Silicon rubber gasket
- LED driver certified by Intertek








ZH1211



ZH1212

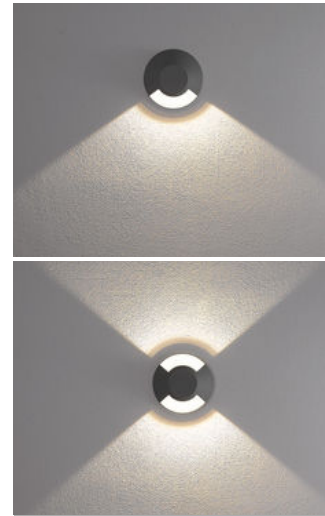


ZH1211



ZH1212

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/1211	1x7W CREE	3000K	67lm	110°	82	⊕ 200-240V~ 50Hz	0.89	IP67
ZH/007/1212	1x7W CREE	3000K	135lm	99°	82	⊕ 200-240V~ 50Hz	0.89	IP67

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- Recessed plastic box
- 500kg static weight allowed
- LED driver certified by Intertek







ZH1214



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/1214	1x7W CREE	3000K	188lm	70°	82	⊕ 200-240V~ 50Hz	0.89	IP67

- Body and bracket in die-cast aluminium
- Powder coated with pretreatment for outdoor use
- Clear PC
- Silicon rubber gasket
- Recessed plastic box
- 500kg static weight allowed
- LED driver certified by Intertek







ZH2792



ZH2802




ZH2792




ZH2802

Item No.	Watt		Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/2792	3x1W		3000K	198lm	31°	81	⊕ 200-240V~ 50Hz	0.53	IP67
ZH/005/2802	5x1W		3000K	310lm	30°	81	⊕ 200-240V~ 50Hz	0.53	IP67


- 304 grade stainless steel cover in 4mm thickness, body in die-cast aluminium
- Tempered clear glass in 8mm thickness
- Silicon rubber gasket
- Recessed plastic box
- 500kg static weight allowed
- LED driver certified by Intertek



ZH2792



ZH2802

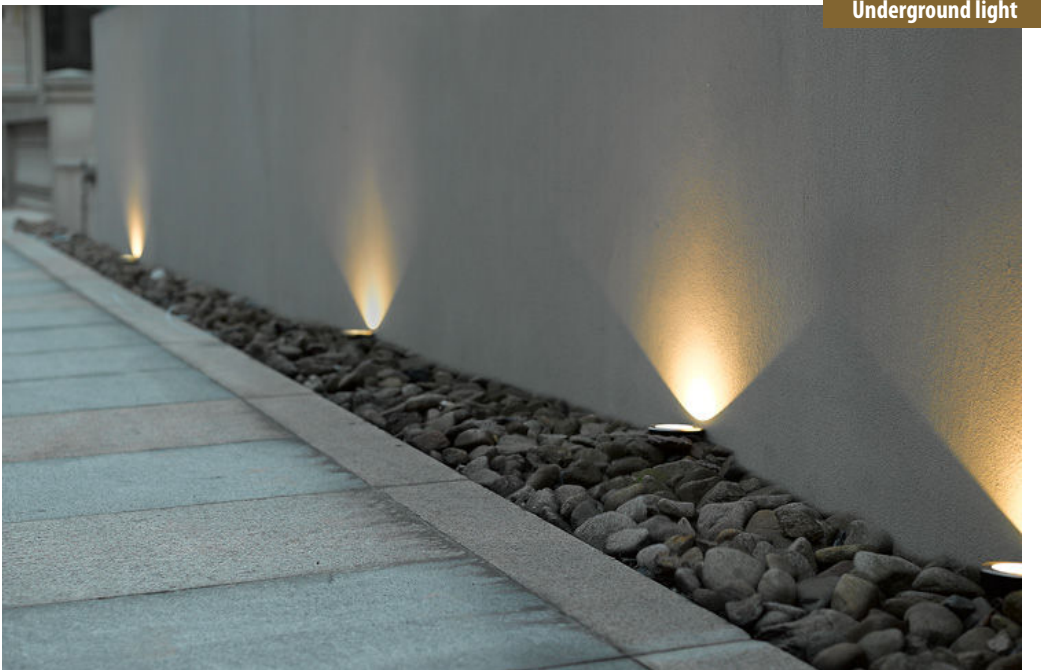




Underground light



ZH1161

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/024/1161	24x1W CREE	3000K	905lm	30°	82	200-240V~ 50Hz	0.94	IP67

- 304 grade stainless steel cover in 4mm thickness, body in die-cast aluminium
- Tempered clear glass in 8mm thickness
- Silicon rubber gasket
- Recessed plastic box
- 500kg static weight allowed
- LED driver certified by Intertek

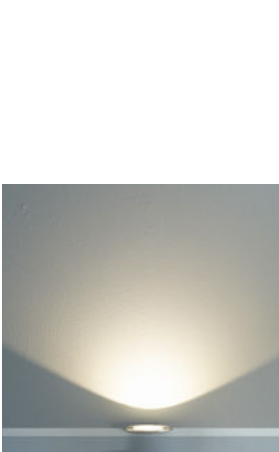

ZH2641




ZH2642

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/007/2641-42	1x7W CREE	3000K	473lm	24°	81	200-240V~ 50Hz	0.89	IP67


- 304 grade stainless steel cover in 4mm thickness, body in die-cast aluminium
- Tempered clear glass in 8mm thickness
- Silicon rubber gasket
- Recessed plastic box
- 500kg static weight allowed
- LED driver certified by Intertek




2641-COB



2642-COB

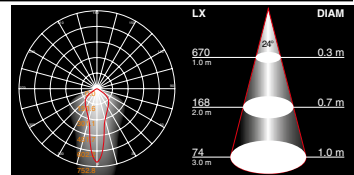

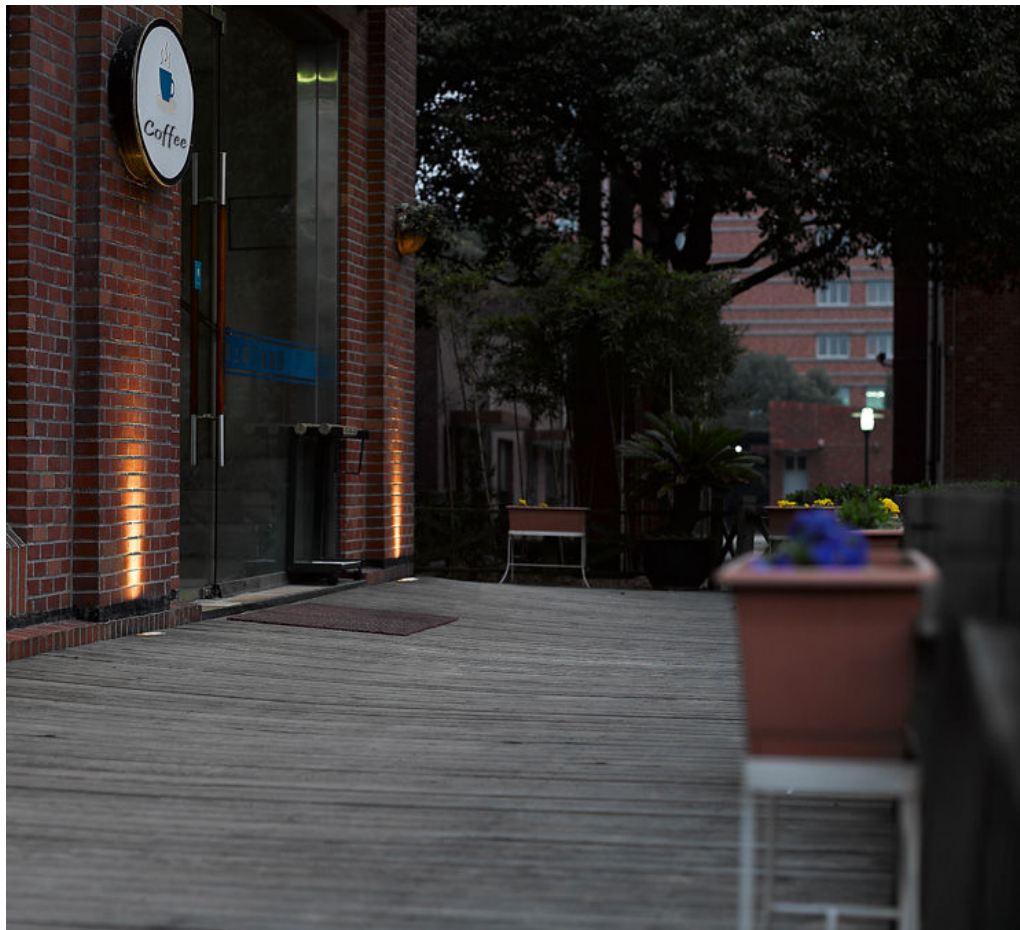

ZH2651



ZH2652




Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/006/2651	6x1W CREE	3000K	416lm	23°	83	200-240V~ 50Hz	0.53	IP67


- 304 grade stainless steel cover in 4mm thickness, body in die-cast aluminium
- Tempered clear glass in 8mm thickness
- Silicon rubber gasket
- Recessed plastic box
- 500kg static weight allowed
- LED driver certified by Intertek



2651-LED



2652-LED

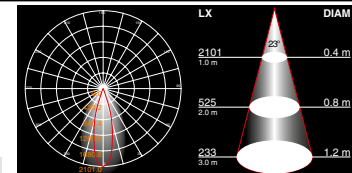



ZH2251






ZH2252



Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/006/2251-52	6x1W CREE	3000K	443lm	25°	80	200-240V~ 50Hz	0.53	IP67

- 304 grade stainless steel cover in 4mm thickness, body in die-cast aluminium
- Tempered clear glass in 8mm thickness
- Silicon rubber gasket
- Recessed plastic box
- 500kg static weight allowed
- LED driver certified by Intertek

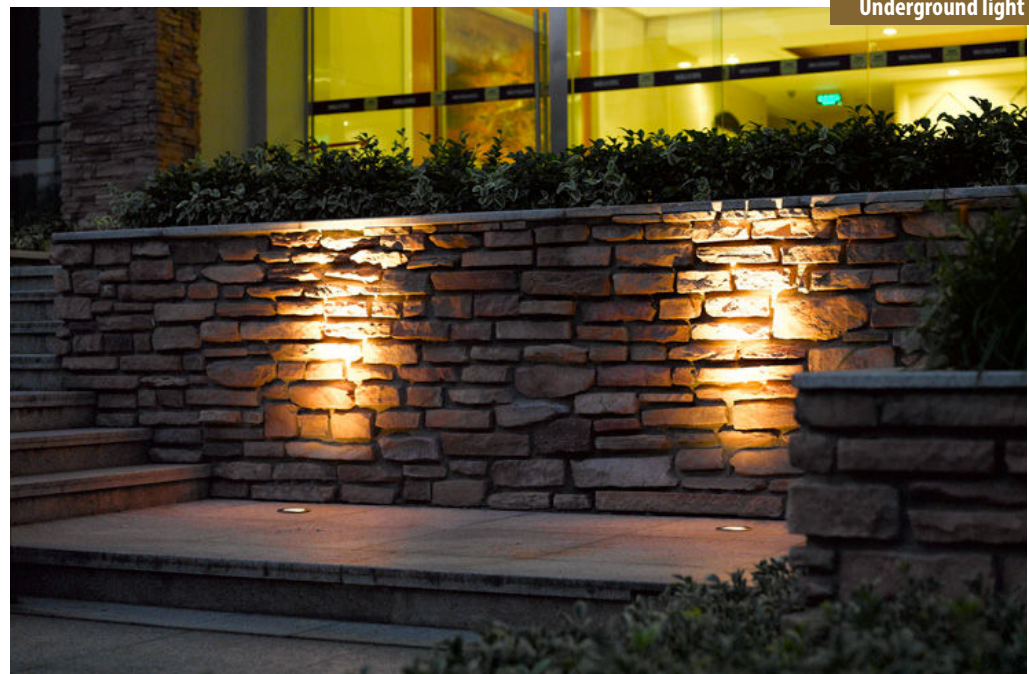

Adjustable





ZH2273



ZH2274

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/006/2273-74	3x2W CREE	3000K	270lm	25°	80	200-240V~ 50Hz	0.82	IP67

- 304 grade stainless steel cover in 4mm thickness, body in die-cast aluminium
- Tempered clear glass in 8mm thickness
- Silicon rubber gasket
- Recessed plastic box
- 500kg static weight allowed
- LED driver certified by Intertek

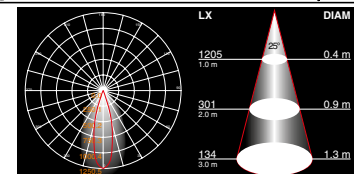



ZH7371

7371





ZH7372

7372

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/003/7371	3x1W CREE	3000K	175lm	26°	81	⊕ 200-240V~ 50Hz	0.53	IP67

▲ 7371 / 7372: GU10 max.35 Watt
 ● 304 grade stainless steel cover in 4mm thickness, body in die-cast aluminium
 ● Tempered clear glass in 8mm thickness
 ● Silicon rubber gasket
 ● Recessed plastic box
 ● 500kg static weight allowed
 ● LED driver certified by Intertek



ZH2291



ZH2292

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/001/2291-92	1x1W CREE	3000K	68lm	28°	80	⊕ 200-240V~ 50Hz	0.5	IP67
304 grade stainless steel cover in 4mm thickness, body in die-cast aluminium - Tempered clear glass in 8mm thickness - Silicon rubber gasket - Recessed plastic box 500kg static weight allowed - LED driver certified by Intertek								



Underground light



ZH2101



ZH2102

Item No.	Watt	Kelvin	Luminous flux	Beam Angle	CRI	Input	Power factor	Safety type
ZH/001/2101-02	1x1W CREE	3000K	72lm	20°	80	⊕ 200-240V~ 50Hz	0.5	IP65
- Body and bracket in oxydized aluminium - Tempered clear glass - Silicon rubber gasket - LED driver certified by Intertek ⊕ 220V-240V~ 50Hz - LED max. 1x1 Watt - IP65								