


SURFACE MOUNT COLLECTION



- LUCE -

RETICOLO

Usually used in the exhibition place for basic lighting and important lighting.
For a simple and fashionable design style and widely used in clothes shop, furniture shop, leisure place, business centre etc.

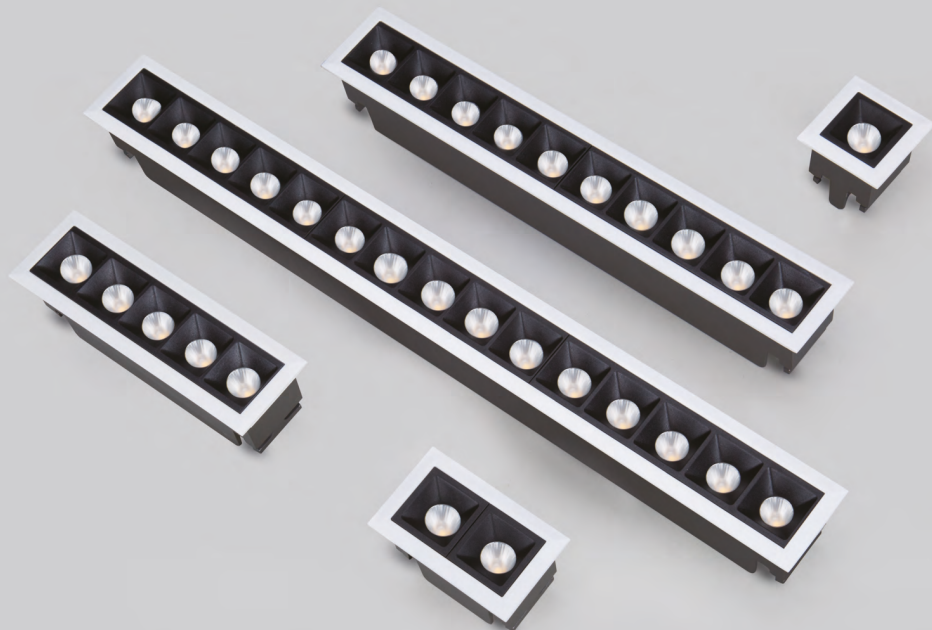

shiny silver



rose gold



gold



matt black



matt white

- LUCE -



-LUCE-



RETICOLO

BK/002/180-A01

Power	2W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	45lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



RETICOLO

BK/020/180-A10

Power	20W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	61lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



RETICOLO

BK/004/180-A02

Power	4W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	60lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



RETICOLO

BK/030/180-A15

Power	30W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	75lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



RETICOLO

BK/006/180-A03

Power	6W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	50lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



RETICOLO

BK/010/180-A05

Power	10W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	54lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD




OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

ACCESSORIES

ROUND SPREAD LENS	RECTANGLE SPREAD LENS	SQUARE SPREAD LENS

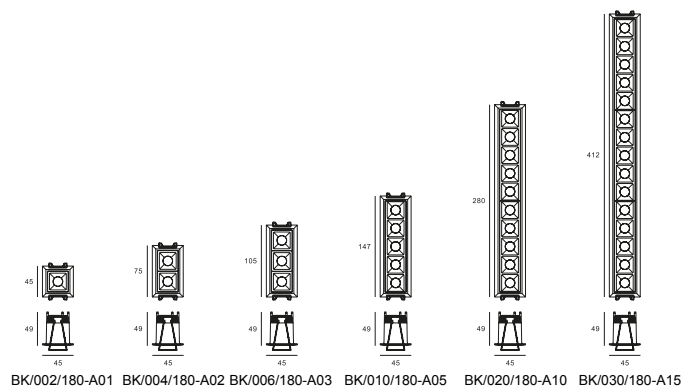

BK/002/180-A01 BK/004/180-A02 BK/006/180-A03 BK/010/180-A05 BK/020/180-A10 BK/030/180-A15

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

- LUCE -

RETICOLO

shiny silver rose gold gold matt black matt white



OPTIONS	
1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

- LUCE -

RETICOLO BK/010/180-A05	
Power	10W
Beam angle	wallwasher
Color temperature	2700K/3000K/3500K/4000K/5000K/RGBW
Light efficiency	43lm/W
Color rendering index	≥90
Operating temperature	-25+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TUV CCC 220-240V IP 20 Voltage 140*37mm UGR<19 Wall washer

RETICOLO BK/020/180-A10	
Power	20W
Beam angle	wallwasher
Color temperature	2700K/3000K/3500K/4000K/5000K/RGBW
Light efficiency	48lm/W
Color rendering index	≥90
Operating temperature	-25+50
Rated life hours	35,000-50,000H
LED chip	SMD


CE CB TUV CCC 220-240V IP 20 Voltage 273*37mm UGR<19 Wall washer

RETICOLO BK/030/180-A15	
Power	30W
Beam angle	wallwasher
Color temperature	2700K/3000K/3500K/4000K/5000K/RGBW
Light efficiency	50lm/W
Color rendering index	≥90
Operating temperature	-25+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE CB TUV CCC 220-240V IP 20 Voltage 405*37mm UGR<19 Wall washer


BK/010/180-A05		BK/020/180-A10		BK/030/180-A15	
45		45		45	
52		52		52	
	147		280		412

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

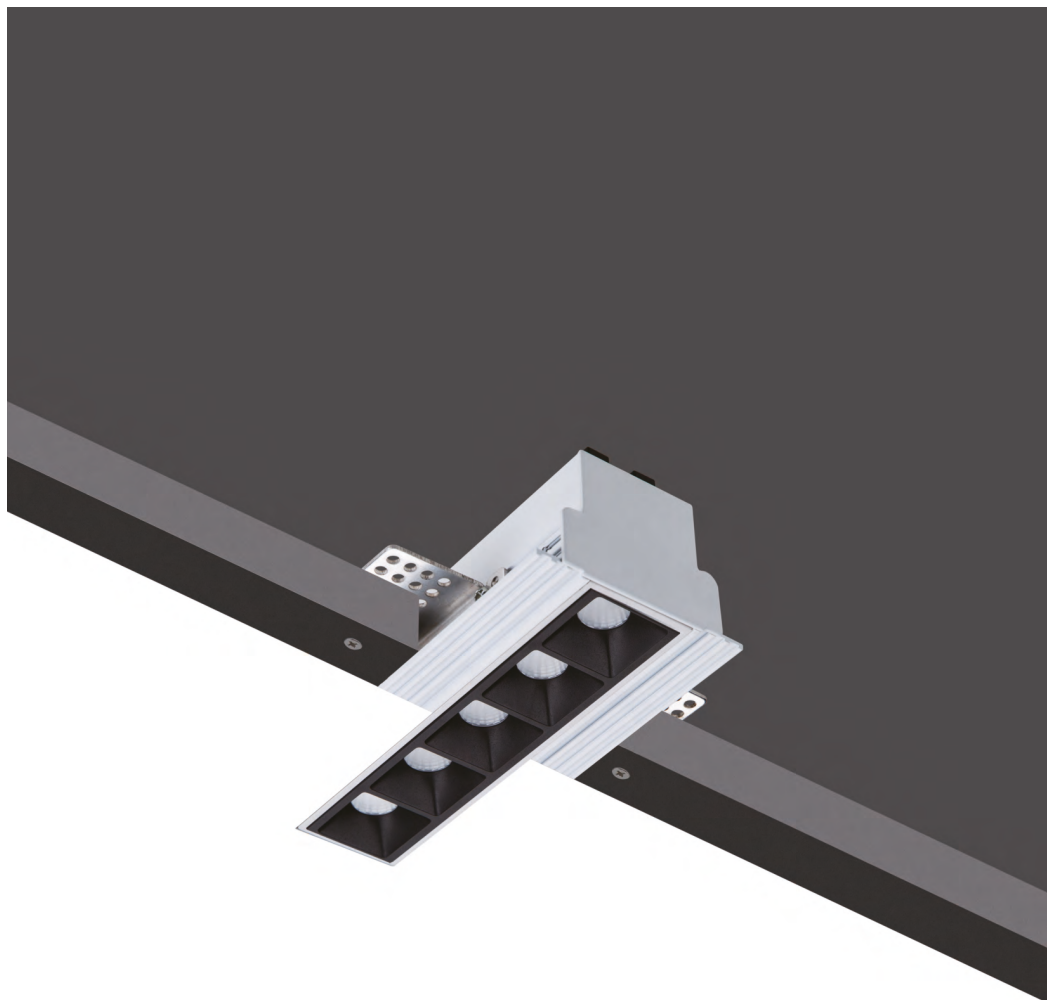

shiny silver rose gold gold matt black matt white

RETICOLO TRIMLESS

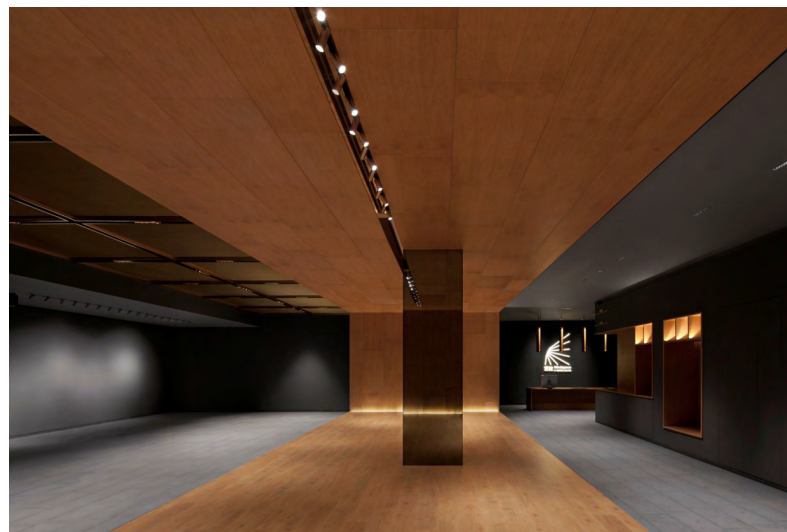

- LUCE -



RETICOLO TRIMLESS

BK/004/180-B02

Power	4W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	60lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



220-240V Voltage 75*70mm UGR<19 Fixed



RETICOLO TRIMLESS

BK/030/180-B15

Power	30W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	75lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



220-240V Voltage 410*70mm UGR<19 Fixed



RETICOLO TRIMLESS

BK/006/180-B03

Power	6W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	50lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



220-240V Voltage 105*70mm UGR<19 Fixed



RETICOLO TRIMLESS

BK/010/180-B05

Power	10W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	54lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



220-240V Voltage 145*70mm UGR<19 Fixed



LATTICE TRIMLESS

BK/020/180-B10

Power	20W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	61lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



220-240V Voltage 278*70mm UGR<19 Fixed

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |


- LUCE -

OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

ACCESSORIES

ROUND SPREAD LENS	RECTANGLE SPREAD LENS	SQUARE SPREAD LENS

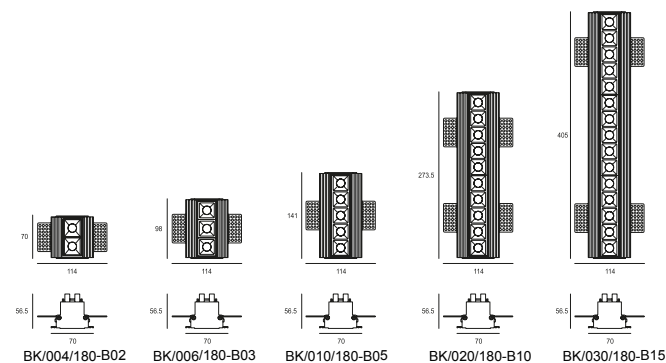

BK/004/180-B02 BK/006/180-B03 BK/010/180-B05 BK/020/180-B10 BK/030/180-B15

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

RETICOLO ADJUSTABLE



shiny silver



rose gold




gold



matt black



matt white

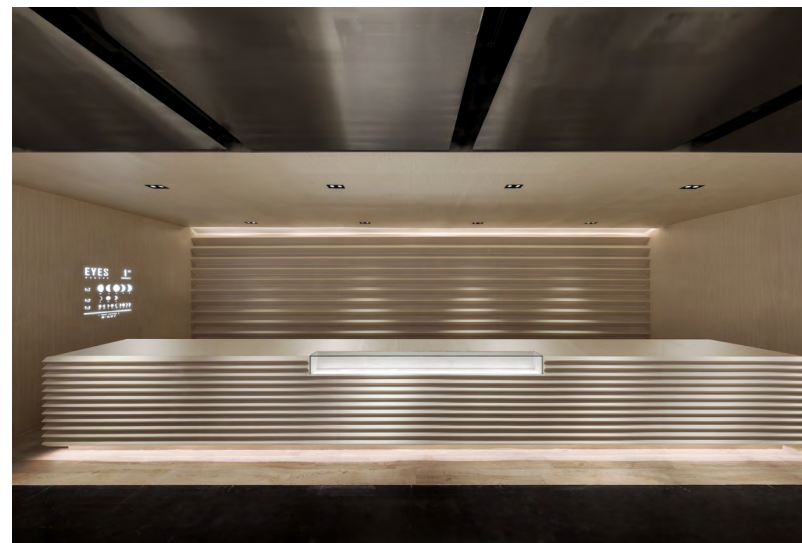

- LUCE -



RETICOLO ADJUSTABLE BK/002/180-C01

Power	2W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	45lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



Voltage 220-240V Adjustable 55*45mm UGR<19 Adjustable



RETICOLO ADJUSTABLE BK/020/180-C10

Power	20W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	61lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



Voltage 220-240V Adjustable 290*45mm UGR<19 Adjustable



RETICOLO ADJUSTABLE BK/004/180-C02

Power	4W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	60lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



Voltage 220-240V Adjustable 75*45mm UGR<19 Adjustable



RETICOLO ADJUSTABLE BK/030/180-C15

Power	30W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	75lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



Voltage 220-240V Adjustable 420*45mm UGR<19 Adjustable



RETICOLO ADJUSTABLE BK/006/180-C03

Power	6W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	50lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



Voltage 220-240V Adjustable 110*45mm UGR<19 Adjustable



RETICOLO ADJUSTABLE BK/010/180-C05

Power	10W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	54lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD




Voltage 220-240V Adjustable 155*45mm UGR<19 Adjustable

OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

ACCESSORIES

ROUND SPREAD LENS	RECTANGLE SPREAD LENS	SQUARE SPREAD LENS

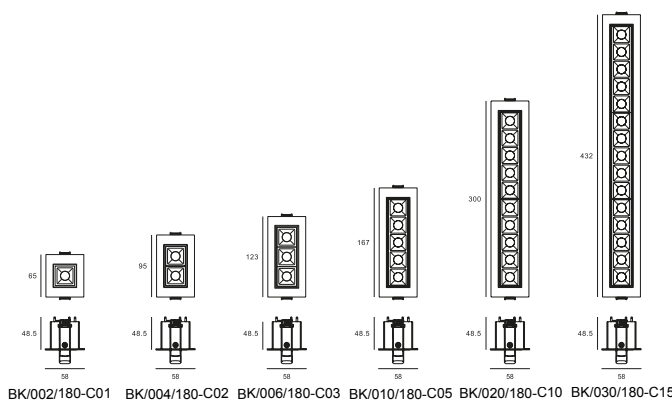


BK/002/180-C01 BK/004/180-C02 BK/006/180-C03 BK/010/180-C05 BK/020/180-C10 BK/030/180-C15

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

RETICOLO L

shiny silver rose gold gold matt black matt white

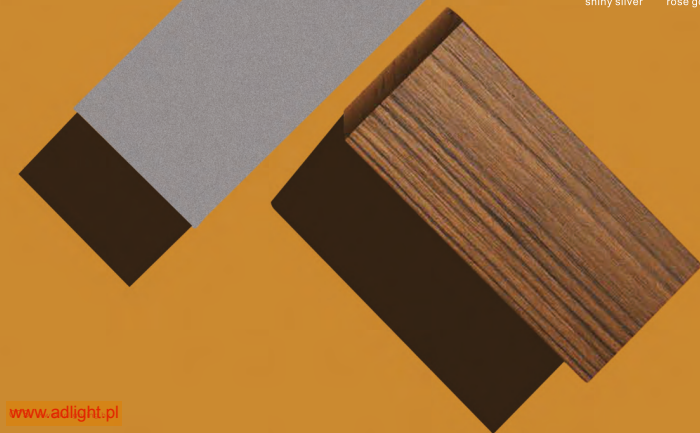

www.adlight.pl



OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

RETICOLO L

BK/010/011-A01

Power	10W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	>85lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB

CE CB TUV CCC



220-240V Voltage 75*75mm UGR<19 Fixed

RETICOLO L

BK/020/011-A02

Power	20W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	>85lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB

CE CB TUV CCC



220-240V Voltage 145*75mm UGR<19 Fixed

RETICOLO L

BK/030/011-A03

Power	30W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	>85lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB

CE CB TUV CCC




220-240V Voltage 218*75mm UGR<19 Fixed


ACCESSORIES

ROUND SPREAD LENS	RECTANGLE SPREAD LENS	SQUARE SPREAD LENS


BK/010/011-A01



BK/020/011-A02



BK/030/011-A03



COLOUR | BK ■ WH □

MATERIAL | AL

www.adlight.pl



RETICOLO L

- LUCE -





RETICOLO L	BK/006/832-A01	
Power	6W/8W	
Beam angle	15°/23°/36°	
Color temperature	2700K/3000K/3500K/4000K/5000K	
Light efficiency	80lm/W	
Color rendering index	≥90	
Operating temperature	-25-+50	
Rated life hours	35,000-50,000H	
LED chip	COB	

CE CB TUV CCC


RETICOLO L	BK/012/832-A02	
Power	12W/16W	
Beam angle	15°/23°/36°	
Color temperature	2700K/3000K/3500K/4000K/5000K	
Light efficiency	67lm/W	
Color rendering index	≥90	
Operating temperature	-25-+50	
Rated life hours	35,000-50,000H	
LED chip	COB	

CE CB TUV CCC

OPTIONS	
1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC



COLOUR | BK ■ WH □ | MATERIAL | AL |

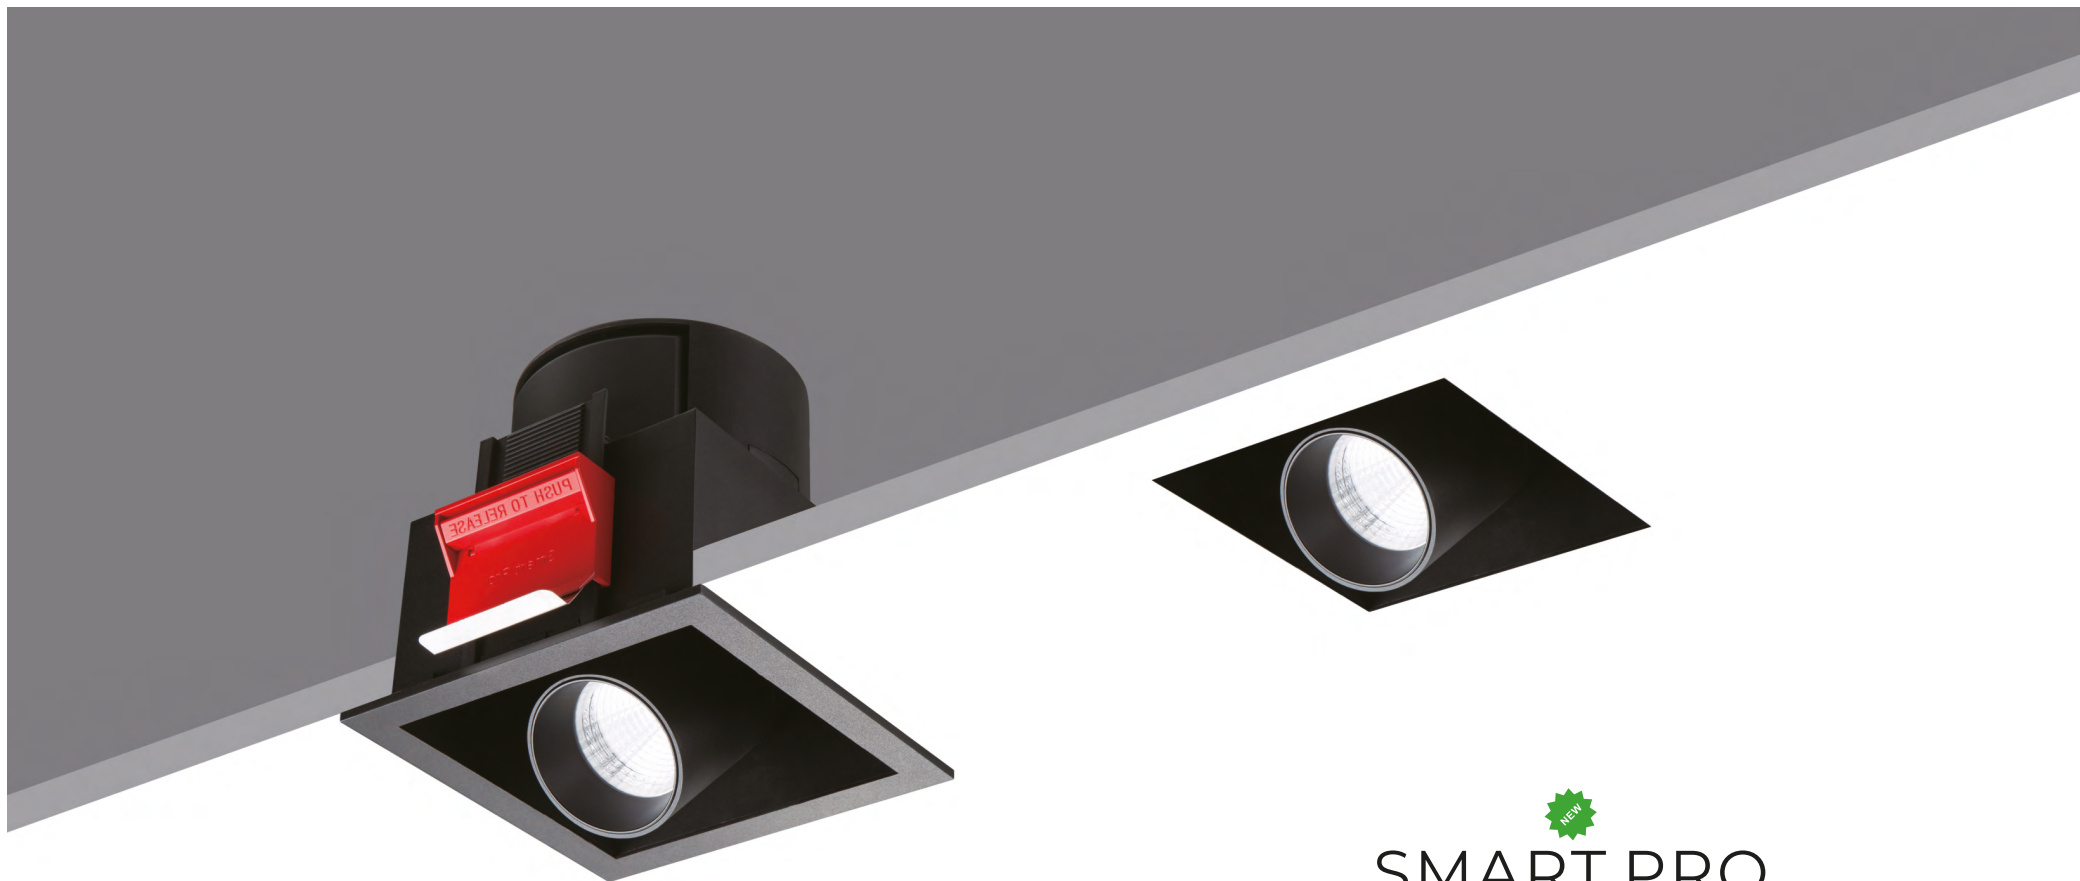


SMART PRO

- LUCE -





SMART PRO		BK/020/833-A01
	Power	20W
	Beam angle	15°/23°/36°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	75lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE	CB	TUV
Tunable white	Voltage	Adjustable
		Adjustable
		135*135mm
		UGR<19
		Adjustable



SMART PRO		BK/020/833-A01-PE
	Power	20W
	Beam angle	15°/23°/36°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	75lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE	CB	TUV
Tunable white	Voltage	Adjustable
		Adjustable
		135*135mm
		UGR<19
		Adjustable

OPTIONS	
1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC



COLOUR | BK ■ WH □ | MATERIAL | AL |

- LUCE -





SMART PRO		BK/040/833-A02
	Power	40W
	Beam angle	15°/23°/36°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	77lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE	CB	TUV
Tunable white	Voltage	Adjustable
		Adjustable
		135*255mm
		UGR<19
		Adjustable



SMART PRO		BK/040/833-A02-PE
	Power	40W
	Beam angle	15°/23°/36°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	77lm/W
	Color rendering index	≥90
	Operating temperature	-25-+50
	Rated life hours	35,000-50,000H
	LED chip	COB
CE	CB	TUV
Tunable white	Voltage	Adjustable
		Adjustable
		135*255mm
		UGR<19
		Adjustable


OPTIONS	
1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC




COLOUR | BK ■ WH □ | MATERIAL | AL |

shiny silver rose gold gold matt black matt white

RETICOLO SOFFITTO

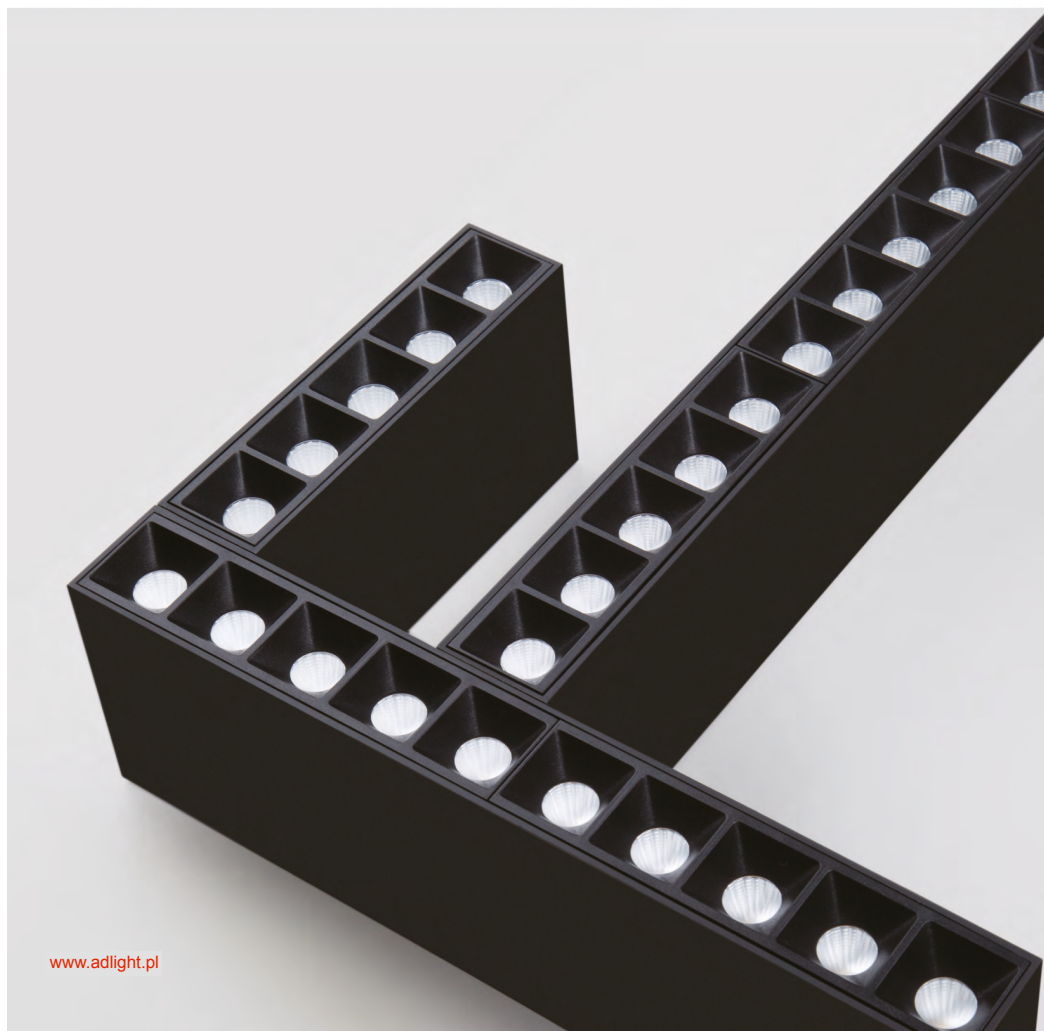

- LUCE -



RETICOLO SOFFITTO **BK/004/180-D02**

Power	4W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	48lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



RETICOLO SOFFITTO **BK/030/180-D15**

Power	30W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	70lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



RETICOLO SOFFITTO **BK/010/180-D05**

Power	10W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	55lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



RETICOLO SOFFITTO **BK/020/180-D10**

Power	20W
Beam angle	15°/30°/45°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	70lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD



COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |


- LUCE -

OPTIONS

1	NO DIM
2	TRIAC

ACCESSORIES

ROUND SPREAD LENS	RECTANGLE SPREAD LENS	SQUARE SPREAD LENS

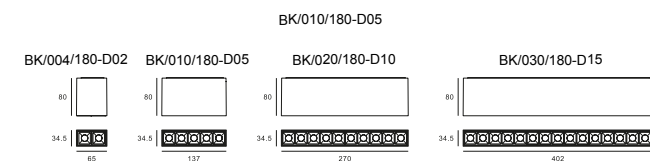

COLOUR | BK ■ WH □ | MATERIAL | AL | ABS+PC |

- LUCE -



SESAMO	BK/006/001-A03
Power	6W
Beam angle	15°/20°/30°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	70lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	SMD

CE

CB

TUV

IP 20

220-240V

Adjustable


3500K

Adjustable

UGR<19

Fixed

OPTIONS	
1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC



COLOUR | WH □ BK ■ | MATERIAL | AL |

ROUL



- LUCE -

ROUL	BK/010/183-A01	
	Power	10W
	Beam angle	15°/23°/36°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	78lm/W
	Color rendering index	≥90
	Operating temperature	-25...+50
	Rated life hours	35,000-50,000H
	LED chip	COB

CE CB TÜV CCC Δ IP 20 | 220-240V UGR<19 Fixed

ROUL	BK/015/183-A02	
	Power	15W
	Beam angle	15°/23°/36°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	59lm/W
	Color rendering index	≥90
	Operating temperature	-25...+50
	Rated life hours	35,000-50,000H
	LED chip	COB


CE CB TÜV CCC Δ IP 20 | 220-240V UGR<19 Fixed

ROUL	BK/025/183-A03	
	Power	25W/30W
	Beam angle	15°/23°/36°
	Color temperature	2700K/3000K/3500K/4000K/5000K
	Light efficiency	64lm/W
	Color rendering index	≥90
	Operating temperature	-25...+50
	Rated life hours	35,000-50,000H
	LED chip	COB


CE CB TÜV CCC Δ IP 20 | 220-240V UGR<19 Fixed

OPTIONS	
1	NO DIM
2	DIM 1-10V
3	TRIAC

BK/010/183-A01 BK/015/183-A02 BK/025/183-A03



COLOUR | WH □ BK ■ | MATERIAL | AL |

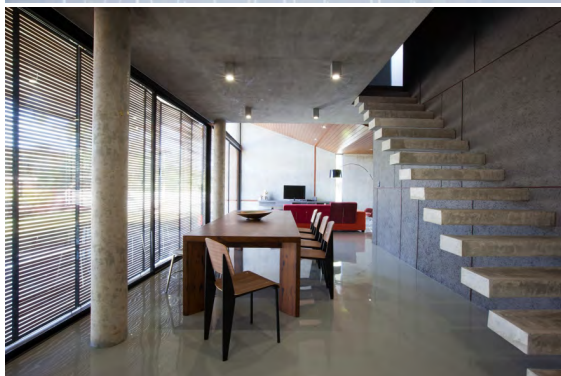

SOUL



SOUL		
BK/010/183-B01		
Power	10W	
Beam angle	15°/30°/45°	
Color temperature	2700K/3000K/3500K/4000K/5000K	
Light efficiency	68lm/W	
Color rendering index	≥90	
Operating temperature	-25-+50	
Rated life hours	35,000-50,000H	
LED chip	COB	

CE CB TUV CCC IP 20 Voltage UGR<19 Fixed




SOUL		
BK/015/183-B02		
Power	15W	
Beam angle	15°/30°/45°	
Color temperature	2700K/3000K/3500K/4000K/5000K	
Light efficiency	80lm/W	
Color rendering index	≥90	
Operating temperature	-25-+50	
Rated life hours	35,000-50,000H	
LED chip	COB	

CE CB TUV CCC IP 20 Voltage UGR<19 Fixed

OPTIONS	
1	NO DIM
2	DIM 1-10V
3	TRIAC

BK/010/183-B01 BK/015/183-B02




COLOUR | WH □ BK ■ | MATERIAL | AL |

- LUCE -



HERA	BK/010/005-A01	
Power	10W/12W	
Beam angle	23°	
Color temperature	2700K/3000K/3500K/4000K/5000K	
Light efficiency	79lm/W	
Color rendering index	≥90	
Operating temperature	-25-+50	
Rated life hours	35,000-50,000H	
LED chip	COB	
CE CB TUV IP 20 220-240V 0W-12W 3500K UGR<19		
Voltage Adjustable Adjustable UGR<19 Adjustable		


OPTIONS	
1	NO DIM
2	TRIAC



HERA

COLOUR | WH □ BK ■ | MATERIAL | AL |

BAMBOO

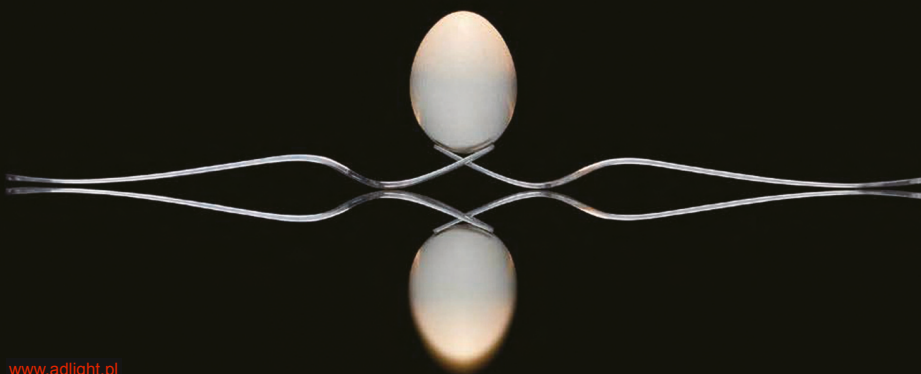

www.adlight.pl

- LUCE -



BAMBOO	BK/012/098	
Power	12W/15W	
Beam angle	15°/23°/36°/60°	
Color temperature	2700K/3000K/3500K/4000K/5000K	
Light efficiency	69lm/W	
Color rendering index	≥90	
Operating temperature	-25-+50	
Rated life hours	35,000-50,000H	
LED chip	COB	



black+gold




Chrome



white+gold


OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC



COLOUR | BK+GD ■ CR ■ WH+BK ■ | MATERIAL | AL |

www.adlight.pl

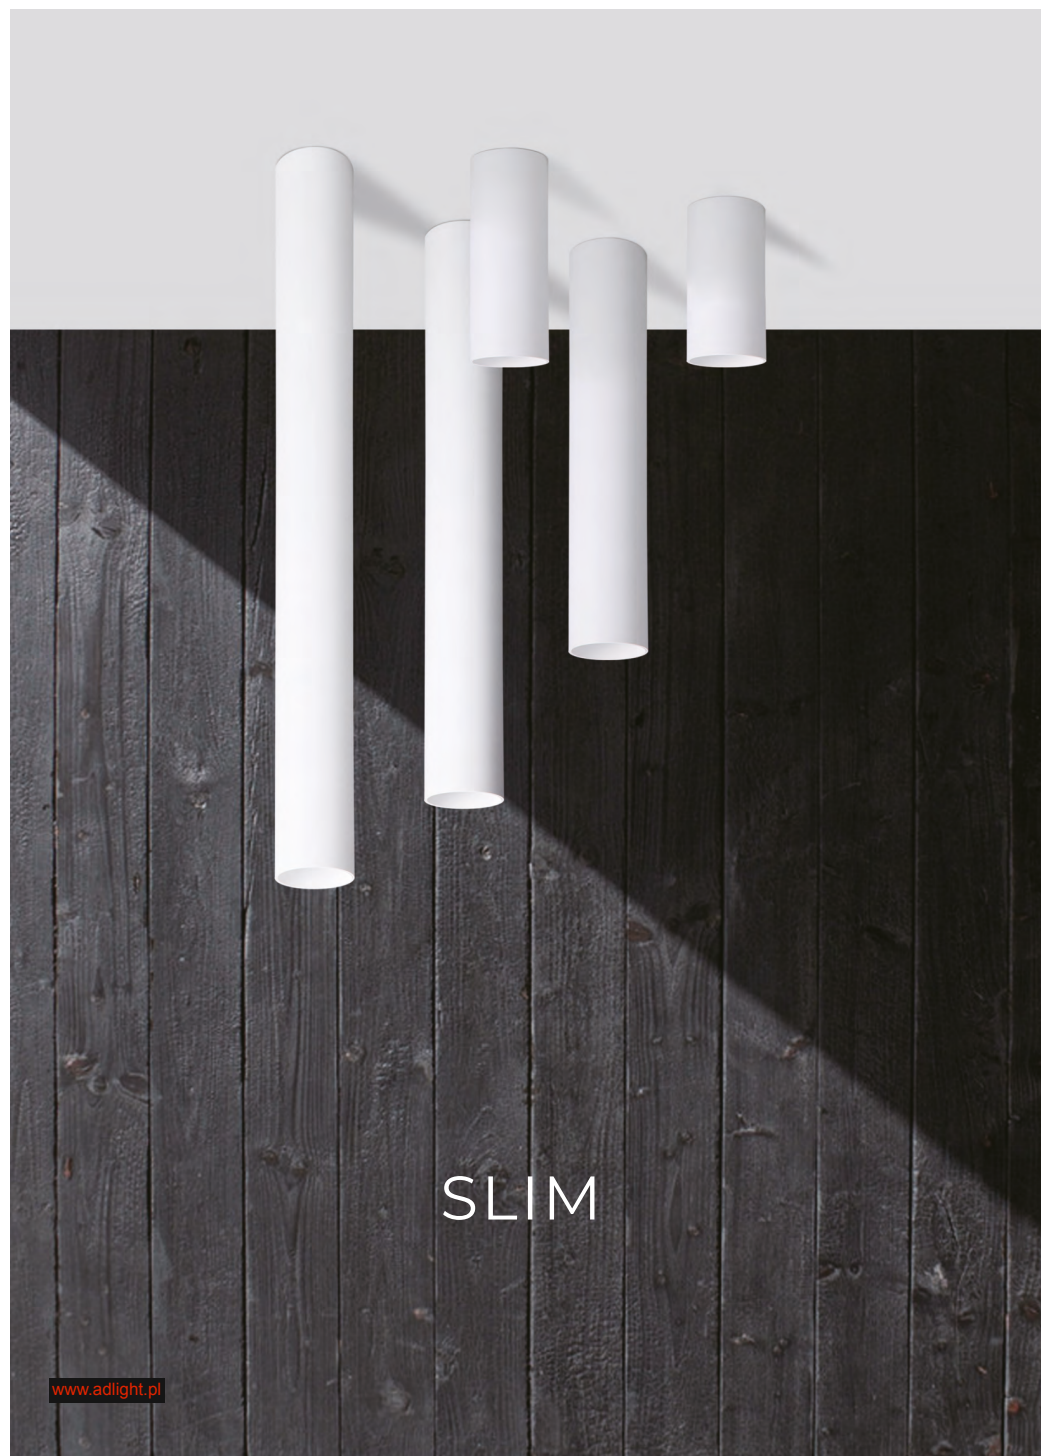

- LUCE -




SLIM	BK/012/197A
Power	12W/15W
Beam angle	15°/23°/36°/60°
Color temperature	2700K/3000K/3500K/4000K/5000K
Light efficiency	87lm/W
Color rendering index	≥90
Operating temperature	-25-+50
Rated life hours	35,000-50,000H
LED chip	COB



OPTIONS

1	NO DIM
2	DIM 1-10V
3	DIM DALI
4	TRIAC

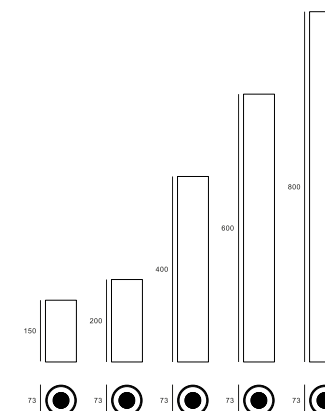

COLOUR | BK ■ WH □ | MATERIAL | AL |



MINO

Mino is a suspended luminaire for accent lighting applications. Its stylish and elegant geometry and its solid body of machined aluminium define a piece of a highly decorative character and perceived high quality. Its light beam, strictly defined by a micro-reflector, optimises the light beam of the LED, in order to obtain a relatively elevated illuminance at the working plane, thanks to a remarkable utilization of the lumen gross flow.

www.adlight.pl




- LUCE -

MINO	BK/003/007A	
Power	3W	
Beam angle	12°/20°	
Color temperature	2700K/3000K/3500K/4000K/5000K	
Light efficiency	55lm/W	
Color rendering index	≥90	
Operating temperature	-25-+50	
Rated life hours	35,000-50,000H	
LED chip	SMD	
CE CB TÜV CCC ENEC IP 20 220-240V Voltage 0°/180° Adjustable 352° Adjustable Ø35mm UGR<19 Adjustable		


MINO	BK/003/007B	
Power	3W	
Beam angle	12°/20°	
Color temperature	2700K/3000K/3500K/4000K/5000K	
Light efficiency	55lm/W	
Color rendering index	≥90	
Operating temperature	-25-+50	
Rated life hours	35,000-50,000H	
LED chip	SMD	
CE CB TÜV CCC ENEC IP 20 220-240V Voltage 0°/180° Adjustable 352° Adjustable UGR<19 Adjustable		

OPTIONS	
1	NO DIM

BK/003/007A



BK/003/007B




COLOUR | BK ■ WH □

MATERIAL | AL

www.adlight.pl


- LUCE -

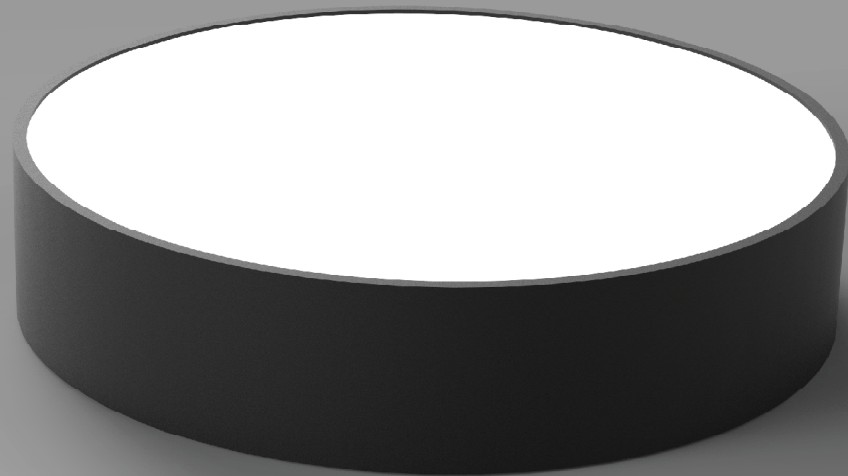

Size(mm) Φ 250x65

BK/024/108


Power	24W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD



Size(mm) Φ 300x65

BK/030/108

Power	30W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD



Size(mm) Φ 350x65

BK/036/108


Power	36W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD



Size(mm) Φ 450x65


BK/048/108

Power	48W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD




Finish : ☐ Sand White ☐ Sand Silver ☐ Sand Black

- LUCE -

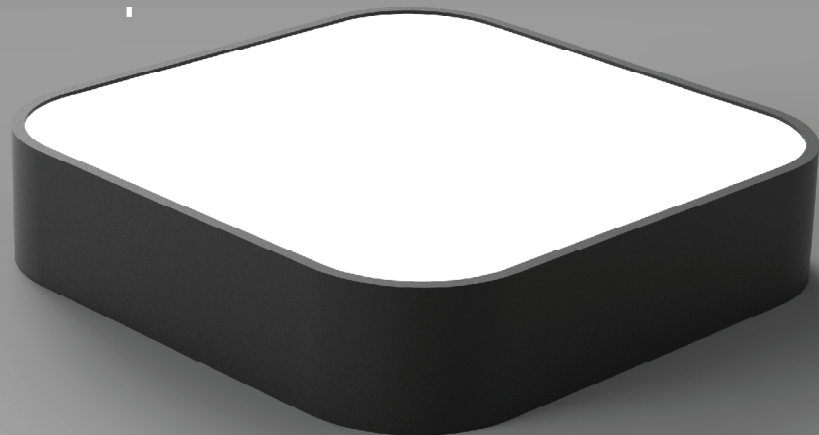

Finish : ☐ Sand White ☐ Sand Silver ☐ Sand Black



Size(mm) 250x250x65


NK/024/189

Power	24W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD

CE CB TUV  

NK/030/189




Size(mm) 300x300x65

Power	30W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD

CE CB TUV  

NK/036/189




Size(mm) 350x350x65

Power	36W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD

CE CB TUV  

NK/048/189




Size(mm) 450x450x65

Power	48W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD

CE CB TUV  

BK/030/103

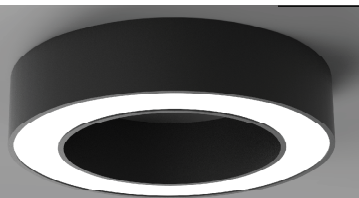


Power	30W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD

Size(mm)

Φ300x65




BK/036/103

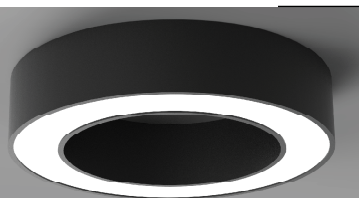


Power	36W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD

Size(mm)

Φ350x65




BK/048/103

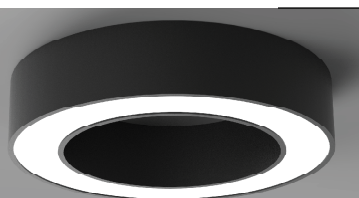

Power	48W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD


Size(mm)

Φ450x65

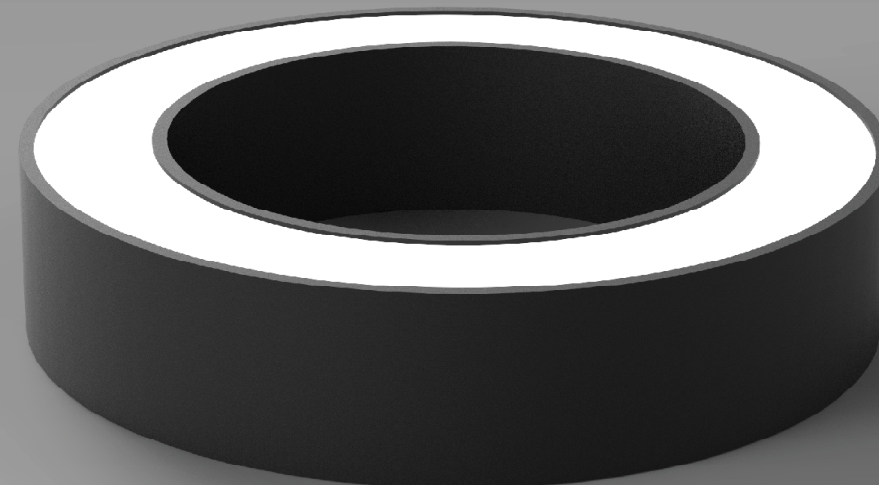


Finish : Sand White Sand Silver Sand Black

-LUCE-

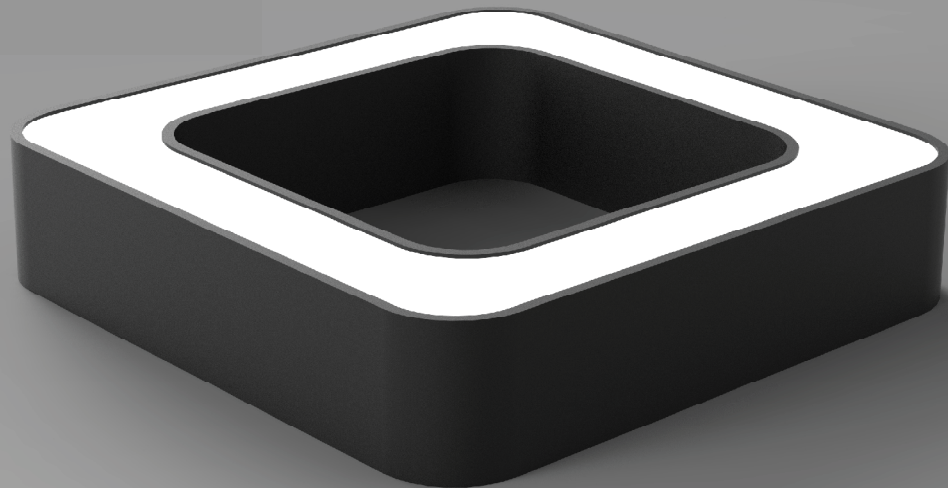

Finish :  Sand White  Sand Silver  Sand Black

BK/030/110

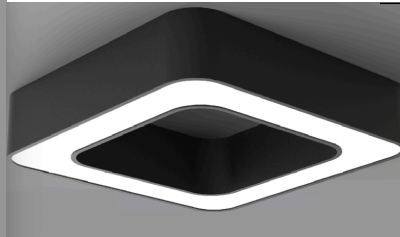


Power	30W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD

Size(mm)

300x300x65



BK/036/110

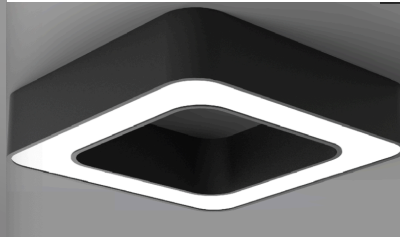


Power	36W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD

Size(mm)

350x350x65



BK/048/110

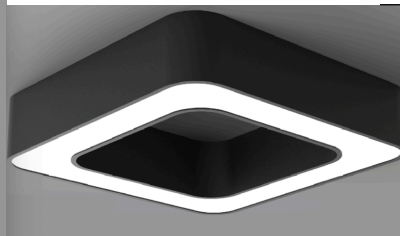

Power	48W
Beam angle	120°
Color temperature	3000/4000/6000K
Light efficiency	100lm/W
Color rendering index	>80
Operating temperature	-25-+50c
Rated life hours	35,000-50,000
LED chip	SMD

Size(mm)

450x450x65

