

- LUCE -



- shiny silver
- rose gold
- gold
- matt black
- matt white

# LATTICE TRACK



## LATTICE TRACK

### TK/010/0E05

|                       |                               |
|-----------------------|-------------------------------|
| Power                 | 10W                           |
| Beam angle            | 15°/30°/45°                   |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 52lm/W                        |
| Color rendering index | ≥90                           |
| Operating temperature | -25-+50                       |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | SMD                           |

CE CB TÜV CCC 220-240V IP 20 Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable

## LATTICE TRACK

### TK/020/0E10

|                       |                               |
|-----------------------|-------------------------------|
| Power                 | 20W                           |
| Beam angle            | 15°/30°/45°                   |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 67lm/W                        |
| Color rendering index | ≥90                           |
| Operating temperature | -25-+50                       |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | SMD                           |

CE CB TÜV CCC 220-240V IP 20 Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable

## LATTICE TRACK

### TK/030/0E15

|                       |                               |
|-----------------------|-------------------------------|
| Power                 | 30W                           |
| Beam angle            | 15°/30°/45°                   |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 69lm/W                        |
| Color rendering index | ≥90                           |
| Operating temperature | -25-+50                       |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | SMD                           |



CE CB TÜV CCC 220-240V IP 20 Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable

## OPTIONS


|   |        |
|---|--------|
| 1 | NO DIM |
| 2 | TRIAC  |

## ACCESSORIES

| ROUND SPREAD LENS | RECTANGLE SPREAD LENS | SQUARE SPREAD LENS |
|-------------------|-----------------------|--------------------|
|                   |                       |                    |



COLOUR | BK ■ WH □ | MATERIAL | AL I ABS+PC |

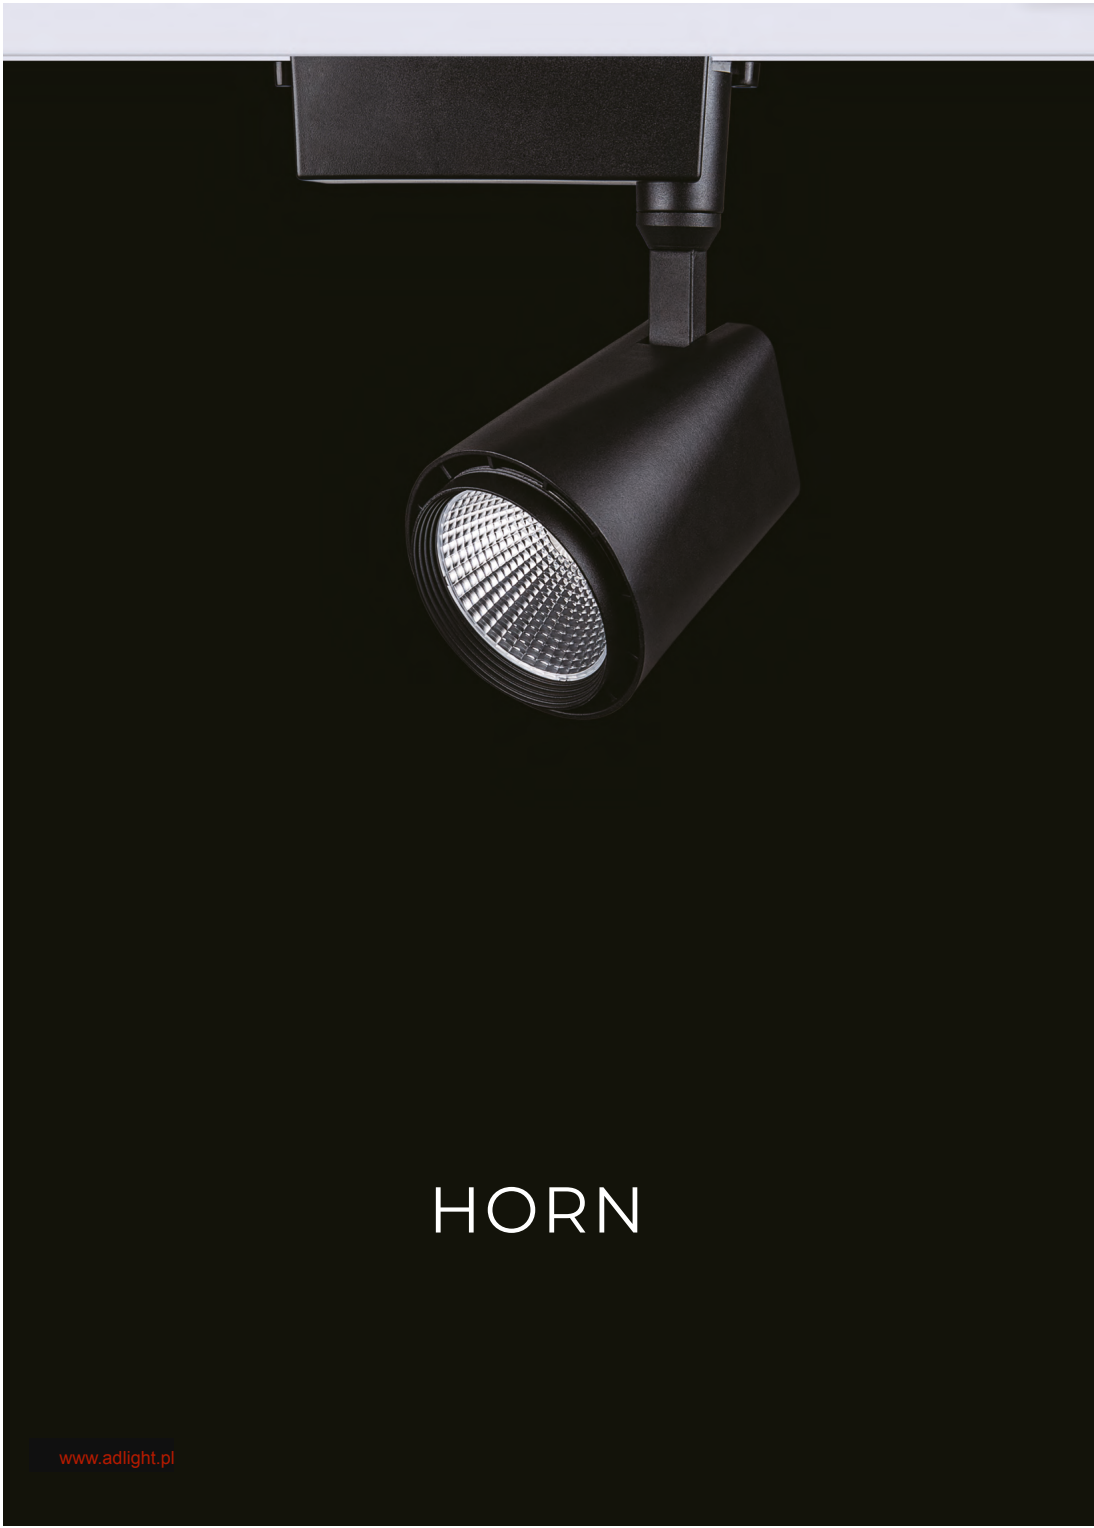

HORN

- LUCE -



|                       |                               |
|-----------------------|-------------------------------|
| HORN                  | TK/030/35/0077                |
| Power                 | 30W/35W                       |
| Beam angle            | 15°/23°/36°                   |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 100lm/W                       |
| Color rendering index | ≥90                           |
| Operating temperature | -25-+50                       |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | COB                           |

CE CB TÜV CCC

220-240V

IP 20

Voltage

Adjustable

Adjustable


Euro adapt

UGR<19

Adjustable

|         |           |
|---------|-----------|
| OPTIONS |           |
| 1       | NO DIM    |
| 2       | DIM 1-10V |
| 3       | TRIAC     |

|                                                                                     |  |
|-------------------------------------------------------------------------------------|--|
| ACCESSORIES                                                                         |  |
| HONEYCOMB LOUVER                                                                    |  |
|  |  |



# SPREAD



- LUCE -

| SPREAD                   |                       | TK/007/0091                                                                                                                                                                                                   |  |
|--------------------------|-----------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--|
|                          | Power                 | 7W                                                                                                                                                                                                            |  |
|                          | Beam angle            | 23°                                                                                                                                                                                                           |  |
|                          | Color temperature     | 2700K/3000K/3500K/4000K/5000K                                                                                                                                                                                 |  |
|                          | Light efficiency      | >85lm/W                                                                                                                                                                                                       |  |
|                          | Color rendering index | ≥85                                                                                                                                                                                                           |  |
|                          | Operating temperature | -25~+50                                                                                                                                                                                                       |  |
|                          | Rated life hours      | 35,000-50,000H                                                                                                                                                                                                |  |
|                          | LED chip              | COB                                                                                                                                                                                                           |  |
| <div>CE CB TUV CCC</div> |                       | <div><div><div>220-240V</div><div>Voltage</div></div><div><div>0°/°</div><div>Adjustable</div></div><div><div>355°</div><div>Adjustable</div></div><div><div>UGR&lt;19</div><div>Adjustable</div></div></div> |  |

| SPREAD                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |                               | TK/020/0092 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------|
| Power                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | 20W                           |             |
| Beam angle                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           | 23°                           |             |
| Color temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    | 2700K/3000K/3500K/4000K/5000K |             |
| Light efficiency                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | >90lm/W                       |             |
| Color rendering index                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | ≥85                           |             |
| Operating temperature                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                | -25~+50                       |             |
| Rated life hours                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     | 35,000-50,000H                |             |
| LED chip                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | COB                           |             |
| <div><div><div><div>CE</div><div>CB</div><div>TUV</div><div></div><div></div><div></div></div><div><div></div><div><div></div><div>Adjustable</div></div><div><div></div><div>Adjustable</div></div><div><div></div><div>Adjustable</div></div><div><div></div><div>Adjustable</div></div></div></div></div> |                               |             |

SPREAD

TK/030/0093

|                       |                               |
|-----------------------|-------------------------------|
| Power                 | 30W                           |
| Beam angle            | 23°                           |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | >90lm/W                       |
| Color rendering index | ≥85                           |
| Operating temperature | -25~+50                       |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | COB                           |

CE

CB

TUV







220-240V



Voltage

0°/°



Adjustable

355°



Adjustable

UGR<19



Adjustable



Adjustable

| OPTIONS |           |
|---------|-----------|
| 1       | NO DIM    |
| 2       | DIM 1-10V |
| 3       | TRIAC     |



70



90



90



120



105



130

COLOUR | BK ■ WH □ | MATERIAL | AL

PABLO







|                                                                                                                                                                                                                                                                                                                                                           |                               |                |  |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------|--|
| PABLO                                                                                                                                                                                                                                                                                                                                                     |                               | TK/101215/6A01 |  |
| Power                                                                                                                                                                                                                                                                                                                                                     | 10W/12W/15W                   |                |  |
| Beam angle                                                                                                                                                                                                                                                                                                                                                | 15°/23°/36°/60°               |                |  |
| Color temperature                                                                                                                                                                                                                                                                                                                                         | 2700K/3000K/3500K/4000K/5000K |                |  |
| Light efficiency                                                                                                                                                                                                                                                                                                                                          | 74lm/W                        |                |  |
| Color rendering index                                                                                                                                                                                                                                                                                                                                     | ≥90                           |                |  |
| Operating temperature                                                                                                                                                                                                                                                                                                                                     | -25~+50                       |                |  |
| Rated life hours                                                                                                                                                                                                                                                                                                                                          | 35,000-50,000H                |                |  |
| LED chip                                                                                                                                                                                                                                                                                                                                                  | COB                           |                |  |
| <div>CE CB TUV CCC RoHS IP 20</div> <div><div><div>220-240V</div><div>Voltage</div></div><div><div>90°</div><div>Adjustable</div></div><div><div>355°</div><div>Adjustable</div></div><div><div>Euro adapt</div><div>Euro adapt</div></div><div><div>UGR&lt;19</div><div>UGR&lt;19</div></div><div><div>Adjustable</div><div>Adjustable</div></div></div> |                               |                |  |



|                                                                                                              |                               |                |  |
|--------------------------------------------------------------------------------------------------------------|-------------------------------|----------------|--|
| PABLO                                                                                                        |                               | TK/101215/6A02 |  |
| Power                                                                                                        | 10W/12W/15W                   |                |  |
| Beam angle                                                                                                   | 15°/23°/36°/60°               |                |  |
| Color temperature                                                                                            | 2700K/3000K/3500K/4000K/5000K |                |  |
| Light efficiency                                                                                             | 74lm/W                        |                |  |
| Color rendering index                                                                                        | ≥90                           |                |  |
| Operating temperature                                                                                        | -25~+50                       |                |  |
| Rated life hours                                                                                             | 35,000-50,000H                |                |  |
| LED chip                                                                                                     | COB                           |                |  |
| <div>CE CB TUV CCC RoHS IP 20</div> <div>Voltage Adjustable Adjustable Euro adapt UGR&lt;19 Adjustable</div> |                               |                |  |



PABLO

TK/2025/6B01

|                       |                               |
|-----------------------|-------------------------------|
| Power                 | 20W/25W                       |
| Beam angle            | 15°/23°/36°/60°               |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 85lm/W                        |
| Color rendering index | ≥90                           |
| Operating temperature | -25-+50                       |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | COB                           |

CE

CB

TUV







220-240V

Voltage



Adjustable



Adjustable



Euro adapt



UGR<19



Adjustable



|                                                                                                                                                                                                                                                                                                                                                            |                       |                               |  |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|--|
| PABLO                                                                                                                                                                                                                                                                                                                                                      |                       | TK/2025/6B02                  |  |
|                                                                                                                                                                                                                                                                                                                                                            | Power                 | 20W/25W                       |  |
|                                                                                                                                                                                                                                                                                                                                                            | Beam angle            | 15°/23°/36°/60°               |  |
|                                                                                                                                                                                                                                                                                                                                                            | Color temperature     | 2700K/3000K/3500K/4000K/5000K |  |
|                                                                                                                                                                                                                                                                                                                                                            | Light efficiency      | 85lm/W                        |  |
|                                                                                                                                                                                                                                                                                                                                                            | Color rendering index | ≥90                           |  |
|                                                                                                                                                                                                                                                                                                                                                            | Operating temperature | -25~+50                       |  |
|                                                                                                                                                                                                                                                                                                                                                            | Rated life hours      | 35,000-50,000H                |  |
|                                                                                                                                                                                                                                                                                                                                                            | LED chip              | COB                           |  |
| <div>CE CB TUV CCC RoHS IP 20</div> <div><div><div>220V/240V</div><div>Voltage</div></div><div><div>90°</div><div>Adjustable</div></div><div><div>355°</div><div>Adjustable</div></div><div><div>Euro adapt</div><div>Euro adapt</div></div><div><div>UGR&lt;19</div><div>UGR&lt;19</div></div><div><div>Adjustable</div><div>Adjustable</div></div></div> |                       |                               |  |

COLOUR | BK ■ WH □ | MATERIAL | AL |




|                                                                 |                               |             |  |
|-----------------------------------------------------------------|-------------------------------|-------------|--|
| PABLO                                                           |                               | TK/030/6C01 |  |
| Power                                                           | 30W                           |             |  |
| Beam angle                                                      | 15°/23°/36°/60°               |             |  |
| Color temperature                                               | 2700K/3000K/3500K/4000K/5000K |             |  |
| Light efficiency                                                | 106lm/W                       |             |  |
| Color rendering index                                           | ≥90                           |             |  |
| Operating temperature                                           | -25~+50                       |             |  |
| Rated life hours                                                | 35,000-50,000H                |             |  |
| LED chip                                                        | COB                           |             |  |
| Voltage  Adjustable  Adjustable  Euro adapt  UGR<19  Adjustable |                               |             |  |



|                                                                 |                               |             |  |
|-----------------------------------------------------------------|-------------------------------|-------------|--|
| PABLO                                                           |                               | TK/030/6C01 |  |
| Power                                                           | 30W                           |             |  |
| Beam angle                                                      | 15°/23°/36°/60°               |             |  |
| Color temperature                                               | 2700K/3000K/3500K/4000K/5000K |             |  |
| Light efficiency                                                | 106lm/W                       |             |  |
| Color rendering index                                           | ≥90                           |             |  |
| Operating temperature                                           | -25~+50                       |             |  |
| Rated life hours                                                | 35,000-50,000H                |             |  |
| LED chip                                                        | COB                           |             |  |
| Voltage  Adjustable  Adjustable  Euro adapt  UGR<19  Adjustable |                               |             |  |

|         |           |
|---------|-----------|
| OPTIONS |           |
| 1       | NO DIM    |
| 2       | DIM 1-10V |
| 3       | DIM DALI  |
| 4       | TRIAC     |

|             |                    |
|-------------|--------------------|
| ACCESSORIES |                    |
| PMMA        | LINEAR SPREAD LENS |
| SPREAD LENS | SOFTENING LENS     |
| GLASS SBL   | HONEYCOMB LOUVER   |
|             |                    |
|             |                    |
|             |                    |

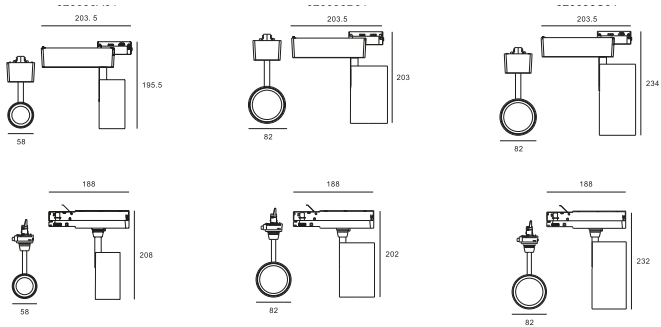

COLOUR | BK ■ WH □ | MATERIAL | AL |



|                                                                                                                                                                                                                                                                         |                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| PABLO                                                                                                                                                                                                                                                                   | TK/38/6D01                    |
| Power                                                                                                                                                                                                                                                                   | 38W                           |
| Beam angle                                                                                                                                                                                                                                                              | 15°/23°/36°/60°               |
| Color temperature                                                                                                                                                                                                                                                       | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency                                                                                                                                                                                                                                                        | 100lm/W                       |
| Color rendering index                                                                                                                                                                                                                                                   | ≥90                           |
| Operating temperature                                                                                                                                                                                                                                                   | -25-+50                       |
| Rated life hours                                                                                                                                                                                                                                                        | 35,000-50,000H                |
| LED chip                                                                                                                                                                                                                                                                | C.O.B                         |
| <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>Adjustable</div> <div>Adjustable</div> <div>Euro adapt</div> <div>UGR&lt;19</div> <div>Adjustable</div> </div> </div> |                               |



|                                                                                                                                                                                                                                                                         |                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| PABLO                                                                                                                                                                                                                                                                   | TK/38/6D02                    |
| Power                                                                                                                                                                                                                                                                   | 38W                           |
| Beam angle                                                                                                                                                                                                                                                              | 15°/23°/36°/60°               |
| Color temperature                                                                                                                                                                                                                                                       | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency                                                                                                                                                                                                                                                        | 100lm/W                       |
| Color rendering index                                                                                                                                                                                                                                                   | ≥90                           |
| Operating temperature                                                                                                                                                                                                                                                   | -25-+50                       |
| Rated life hours                                                                                                                                                                                                                                                        | 35,000-50,000H                |
| LED chip                                                                                                                                                                                                                                                                | C.O.B                         |
| <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>Adjustable</div> <div>Adjustable</div> <div>Euro adapt</div> <div>UGR&lt;19</div> <div>Adjustable</div> </div> </div> |                               |



|                                                                                                                                                                                                                                                                         |                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| PABLO                                                                                                                                                                                                                                                                   | TK/45/6E01                    |
| Power                                                                                                                                                                                                                                                                   | 45W                           |
| Beam angle                                                                                                                                                                                                                                                              | 15°/23°/36°                   |
| Color temperature                                                                                                                                                                                                                                                       | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency                                                                                                                                                                                                                                                        | 100lm/W                       |
| Color rendering index                                                                                                                                                                                                                                                   | ≥90                           |
| Operating temperature                                                                                                                                                                                                                                                   | -25-+50                       |
| Rated life hours                                                                                                                                                                                                                                                        | 35,000-50,000H                |
| LED chip                                                                                                                                                                                                                                                                | C.O.B                         |
| <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>Adjustable</div> <div>Adjustable</div> <div>Euro adapt</div> <div>UGR&lt;19</div> <div>Adjustable</div> </div> </div> |                               |


COLOUR | BK ■ WH □ | MATERIAL | AL |



|                                                                                                                                                                                                                                                                         |                               |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
| PABLO                                                                                                                                                                                                                                                                   | TK/045/6E02                   |
| Power                                                                                                                                                                                                                                                                   | 45W                           |
| Beam angle                                                                                                                                                                                                                                                              | 15°/23°/36°                   |
| Color temperature                                                                                                                                                                                                                                                       | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency                                                                                                                                                                                                                                                        | 100lm/W                       |
| Color rendering index                                                                                                                                                                                                                                                   | ≥90                           |
| Operating temperature                                                                                                                                                                                                                                                   | -25-+50                       |
| Rated life hours                                                                                                                                                                                                                                                        | 35,000-50,000H                |
| LED chip                                                                                                                                                                                                                                                                | C.O.B                         |
| <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>Adjustable</div> <div>Adjustable</div> <div>Euro adapt</div> <div>UGR&lt;19</div> <div>Adjustable</div> </div> </div> |                               |

| OPTIONS |           |
|---------|-----------|
| 1       | NO DIM    |
| 2       | DIM 1-10V |
| 3       | DIM DALI  |
| 4       | TRIAC     |

| ACCESSORIES |                    |
|-------------|--------------------|
| PMMA        | LINEAR SPREAD LENS |
| SPREAD LENS | SOFTENING LENS     |
| GLASS SBL   | HONEYCOMB LOUVER   |
|             |                    |
|             |                    |

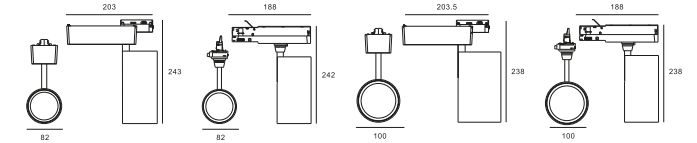

COLOUR | BK ■ WH □ | MATERIAL | AL |



**PABLO**  
020096  
X

LED CHIP **bridgelux** **CITIZEN**  
LED LIGHTING



[www.adlight.pl](http://www.adlight.pl)



**- LUCE -**

| PABLO TK/020/6X01     |                               |
|-----------------------|-------------------------------|
| Power                 | 20W                           |
| Beam angle            | 15°-60°                       |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 50lm/W                        |
| Color rendering index | ≥90/97                        |
| Operating temperature | -25+50                        |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | COB                           |


CE CB TÜV CCC ENEC IP 20 220-240V 90° 355° Euro adapt UGR<19 Adjustable

| PABLO TK/020/6X02     |                               |
|-----------------------|-------------------------------|
| Power                 | 20W                           |
| Beam angle            | 15°-60°                       |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 50lm/W                        |
| Color rendering index | ≥90/97                        |
| Operating temperature | -25+50                        |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | COB                           |

CE CB TÜV CCC ENEC IP 20 220-240V 90° 355° Euro adapt UGR<19 Adjustable

| OPTIONS |           |
|---------|-----------|
| 1       | NO DIM    |
| 2       | DIM 1-10V |
| 3       | DIM DALI  |
| 4       | TRIAC     |

| LIGHT SPOT SHAPE CHOICE |           |
|-------------------------|-----------|
|                         | ROUND     |
|                         | SQUARE    |
|                         | TRIANGLE  |
|                         | RECTANGLE |
|                         | TRAPEZOID |
|                         | SECTOR    |
|                         | RHOMBUS   |

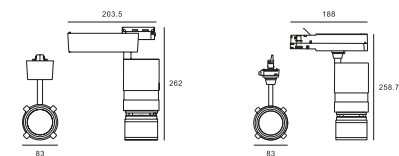

COLOUR | BK ■ WH □ | MATERIAL | AL


[www.adlight.pl](http://www.adlight.pl)

POLE

- LUCE -




| POLE                  | TK/012/097A                   |
|-----------------------|-------------------------------|
| Power                 | 12W                           |
| Beam angle            | 15°/23°/36°                   |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 85lm/W                        |
| Color rendering index | ≥90                           |
| Operating temperature | -25+50                        |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | COB                           |



| ACCESSORIES |                |                  |
|-------------|----------------|------------------|
| PMMA        | SOFTENING LENS | HONEYCOMB LOUVER |
|             |                |                  |

| OPTIONS |           |
|---------|-----------|
| 1       | NO DIM    |
| 2       | DIM 1-10V |
| 3       | TRIAC     |








COLOUR | BK ■ WH □ GD ■ SLV □

MATERIAL | AL



**NEW**  
**POT**

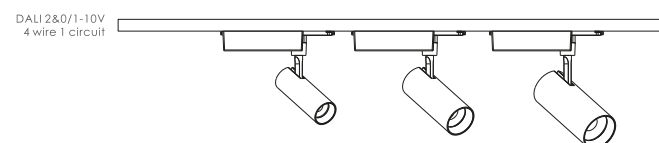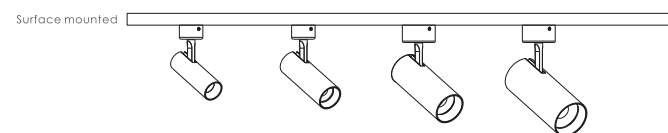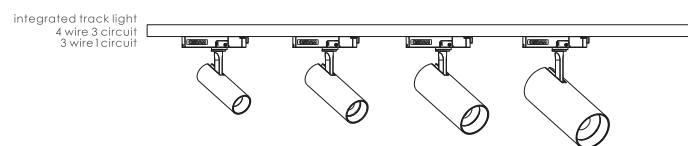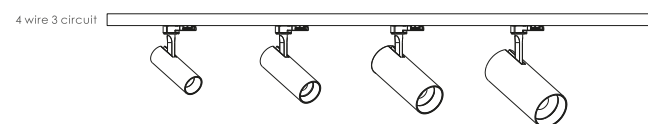

#### HONEYCOMB


black




FW030-3



FW043-3



FW059-3



FW073-3

#### SCREENING CROSSPIECE

black



102A-P01



102B-P01



102C-P01



102D-P01

white



102A-P01



102B-P01



102C-P01



102D-P01

gold



102A-P01



102B-P01



102C-P01



102D-P01

#### CROSS-BARRLE

black



102B-P02



102C-P02



102D-P02



| POT | TK/08/2A01                                                 |                               |
|-----|------------------------------------------------------------|-------------------------------|
|     | Power                                                      | 8W                            |
|     | Beam angle                                                 | 15°/23°/36°/50°               |
|     | Color temperature                                          | 2700K/3000K/3500K/4000K/5000K |
|     | Light efficiency                                           | 66lm/W                        |
|     | Color rendering index                                      | ≥90                           |
|     | Operating temperature                                      | -25+50                        |
|     | Rated life hours                                           | 35,000-50,000H                |
|     | LED chip                                                   | C.O.B                         |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable |                               |



| POT | TK/028/2D01                                                | TK/032/2D01                   |  |
|-----|------------------------------------------------------------|-------------------------------|--|
|     | Power                                                      | 28W/32W                       |  |
|     | Beam angle                                                 | 15°/23°/36°/50°               |  |
|     | Color temperature                                          | 2700K/3000K/3500K/4000K/5000K |  |
|     | Light efficiency                                           | 87lm/W                        |  |
|     | Color rendering index                                      | ≥90                           |  |
|     | Operating temperature                                      | -25+50                        |  |
|     | Rated life hours                                           | 35,000-50,000H                |  |
|     | LED chip                                                   | C.O.B                         |  |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable |                               |  |




| POT | TK/08/2B01                                                 |                               |
|-----|------------------------------------------------------------|-------------------------------|
|     | Power                                                      | 12W/15W                       |
|     | Beam angle                                                 | 15°/23°/36°/50°               |
|     | Color temperature                                          | 2700K/3000K/3500K/4000K/5000K |
|     | Light efficiency                                           | 98lm/W                        |
|     | Color rendering index                                      | ≥90                           |
|     | Operating temperature                                      | -25+50                        |
|     | Rated life hours                                           | 35,000-50,000H                |
|     | LED chip                                                   | C.O.B                         |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable |                               |

| OPTIONS |        |
|---------|--------|
| 1       | NO DIM |
| 2       | TRIAC  |



| POT | TK/08/2C01                                                 |                               |
|-----|------------------------------------------------------------|-------------------------------|
|     | Power                                                      | 20W/25W                       |
|     | Beam angle                                                 | 15°/23°/36°/50°               |
|     | Color temperature                                          | 2700K/3000K/3500K/4000K/5000K |
|     | Light efficiency                                           | 84lm/W                        |
|     | Color rendering index                                      | ≥90                           |
|     | Operating temperature                                      | -25+50                        |
|     | Rated life hours                                           | 35,000-50,000H                |
|     | LED chip                                                   | C.O.B                         |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable |                               |

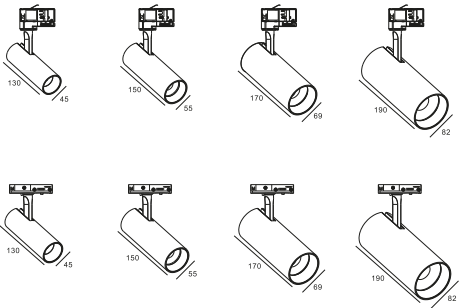

COLOUR | BK ■ WH □ | MATERIAL | AL |

COLOUR | BK ■ WH □ | MATERIAL | AL |



| POT                                                        | TK/10/2A02            |                               |
|------------------------------------------------------------|-----------------------|-------------------------------|
|                                                            | Power                 | 10W                           |
|                                                            | Beam angle            | 15°/23°/36°/50°               |
|                                                            | Color temperature     | 2700K/3000K/3500K/4000K/5000K |
|                                                            | Light efficiency      | 68lm/W                        |
|                                                            | Color rendering index | ≥90                           |
|                                                            | Operating temperature | -25-+50                       |
|                                                            | Rated life hours      | 35,000-50,000H                |
|                                                            | LED chip              | C.O.B                         |
| Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable |                       |                               |



| POT                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | TK/032/2D02           | TK/035/2D02                   | TK/042/2D02 |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|-------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Power                 | 32W/35W/42W                   |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Beam angle            | 15°/23°/36°/50°               |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Color temperature     | 2700K/3000K/3500K/4000K/5000K |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Light efficiency      | 89lm/W                        |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Color rendering index | ≥90                           |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Operating temperature | -25-+50                       |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | Rated life hours      | 35,000-50,000H                |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | LED chip              | C.O.B                         |             |
| <div><div><div></div><div>VoltageAdjustableAdjustableEuro adaptUGR&lt;19Adjustable</div></div></div> |                       |                               |             |




| POT                                                        | TK/15/2B02            |                               |
|------------------------------------------------------------|-----------------------|-------------------------------|
|                                                            | Power                 | 15W                           |
|                                                            | Beam angle            | 15°/23°/36°/50°               |
|                                                            | Color temperature     | 2700K/3000K/3500K/4000K/5000K |
|                                                            | Light efficiency      | 100lm/W                       |
|                                                            | Color rendering index | ≥90                           |
|                                                            | Operating temperature | -25-+50                       |
|                                                            | Rated life hours      | 35,000-50,000H                |
|                                                            | LED chip              | C.O.B                         |
| Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable |                       |                               |

| OPTIONS |        |
|---------|--------|
| 1       | NO DIM |
| 2       | TRIAC  |



| POT                                                        | TK/20252830/2C02      |                               |
|------------------------------------------------------------|-----------------------|-------------------------------|
|                                                            | Power                 | 20W/25W/28W/30W               |
|                                                            | Beam angle            | 15°/23°/36°/50°               |
|                                                            | Color temperature     | 2700K/3000K/3500K/4000K/5000K |
|                                                            | Light efficiency      | 86lm/W                        |
|                                                            | Color rendering index | ≥90                           |
|                                                            | Operating temperature | -25-+50                       |
|                                                            | Rated life hours      | 35,000-50,000H                |
|                                                            | LED chip              | C.O.B                         |
| Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable |                       |                               |

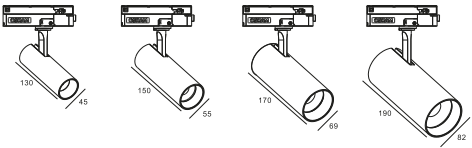

COLOUR | BK ■ WH □ | MATERIAL | AL |

COLOUR | BK ■ WH □ | MATERIAL | AL |



| POT                                                 | TK/08/2A03                                     |
|-----------------------------------------------------|------------------------------------------------|
|                                                     | Power8W                                        |
|                                                     | Beam angle15°/23°/36°/50°                      |
|                                                     | Color temperature2700K/3000K/3500K/4000K/5000K |
|                                                     | Light efficiency66lm/W                         |
|                                                     | Color rendering index≥90                       |
|                                                     | Operating temperature-25+50                    |
|                                                     | Rated life hours35,000-50,000H                 |
|                                                     | LED chipCOB                                    |
| Voltage  Adjustable  Adjustable  UGR<19  Adjustable |                                                |



| POT                                                 | TK/028/2D03                                    | TK/032/2D03 |
|-----------------------------------------------------|------------------------------------------------|-------------|
|                                                     | Power28W/32W                                   |             |
|                                                     | Beam angle15°/23°/36°/50°                      |             |
|                                                     | Color temperature2700K/3000K/3500K/4000K/5000K |             |
|                                                     | Light efficiency87lm/W                         |             |
|                                                     | Color rendering index≥90                       |             |
|                                                     | Operating temperature-25+50                    |             |
|                                                     | Rated life hours35,000-50,000H                 |             |
|                                                     | LED chipCOB                                    |             |
| Voltage  Adjustable  Adjustable  UGR<19  Adjustable |                                                |             |




| POT                                                 | TK/1215/2B03                                   |
|-----------------------------------------------------|------------------------------------------------|
|                                                     | Power12W/15W                                   |
|                                                     | Beam angle15°/23°/36°/50°                      |
|                                                     | Color temperature2700K/3000K/3500K/4000K/5000K |
|                                                     | Light efficiency98lm/W                         |
|                                                     | Color rendering index≥90                       |
|                                                     | Operating temperature-25+50                    |
|                                                     | Rated life hours35,000-50,000H                 |
|                                                     | LED chipCOB                                    |
| Voltage  Adjustable  Adjustable  UGR<19  Adjustable |                                                |

| OPTIONS |        |
|---------|--------|
| 1       | NO DIM |
| 2       | TRIAC  |



| POT                                                 | TK/2025/2C03                                   |
|-----------------------------------------------------|------------------------------------------------|
|                                                     | Power20W/25W                                   |
|                                                     | Beam angle15°/23°/36°/50°                      |
|                                                     | Color temperature2700K/3000K/3500K/4000K/5000K |
|                                                     | Light efficiency84lm/W                         |
|                                                     | Color rendering index≥90                       |
|                                                     | Operating temperature-25+50                    |
|                                                     | Rated life hours35,000-50,000H                 |
|                                                     | LED chipCOB                                    |
| Voltage  Adjustable  Adjustable  UGR<19  Adjustable |                                                |

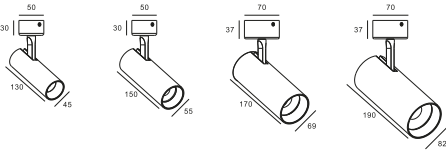

COLOUR | BK ■ WH □ | MATERIAL | AL |

COLOUR | BK ■ WH □ | MATERIAL | AL |





# POT

Various optical performance



Magnify x1.3  
JP073-3-1.3



Magnify x1.5  
JP073-3-1.5



Magnify x3  
JP073-3-3



Magnify x4  
JP073-3-4



Stretch 1.2x4  
JP073-3-1.2x4



Stretch 1.5x5  
JP073-3-1.5x5



Stretch 1x6  
JP073-3-1x6



wires 1 circuit DALI dimming,  
4 wires 1 circuit 1-10V dimming.



Magical effect due to uniform light  
emission surface.



7° 15° 24° 36° 50° Rich optical angle  
to meet different space needs.



Precise light distributions for point-  
precise illuminances with no spill light.



Variety optical components,  
honeycomb louver, cross anti-glare  
ring, anti-glare baffle kits is available.




- LUCE -

| POT                                                                               | TK/010/2B04                   | TK/015/2B04 |
|-----------------------------------------------------------------------------------|-------------------------------|-------------|
| Power                                                                             | 10W/15W                       |             |
| Beam angle                                                                        | 15°/23°/36°/50°               |             |
| Color temperature                                                                 | 2700K/3000K/3500K/4000K/5000K |             |
| Light efficiency                                                                  | 98lm/W                        |             |
| Color rendering index                                                             | ≥90                           |             |
| Operating temperature                                                             | -25-+50                       |             |
| Rated life hours                                                                  | 35,000-50,000H                |             |
| LED chip                                                                          | COB                           |             |
| CE CB TÜV CCC ENEC IP 20 220-240V Voltage Adjustable Adjustable UGR<19 Adjustable |                               |             |

| POT                                                                               | TK/020/2C04                   | TK/020/2C04 | TK/020/2C04 | TK/020/2C04 |
|-----------------------------------------------------------------------------------|-------------------------------|-------------|-------------|-------------|
| Power                                                                             | 20W/25W/28W/30W               |             |             |             |
| Beam angle                                                                        | 15°/23°/36°/50°               |             |             |             |
| Color temperature                                                                 | 2700K/3000K/3500K/4000K/5000K |             |             |             |
| Light efficiency                                                                  | 84lm/W                        |             |             |             |
| Color rendering index                                                             | ≥90                           |             |             |             |
| Operating temperature                                                             | -25-+50                       |             |             |             |
| Rated life hours                                                                  | 35,000-50,000H                |             |             |             |
| LED chip                                                                          | COB                           |             |             |             |
| CE CB TÜV CCC ENEC IP 20 220-240V Voltage Adjustable Adjustable UGR<19 Adjustable |                               |             |             |             |


| POT                                                                               | TK/032/2D04                   | TK/035/2D04 | TK/042/2D04 |
|-----------------------------------------------------------------------------------|-------------------------------|-------------|-------------|
| Power                                                                             | 32W/35W/42W                   |             |             |
| Beam angle                                                                        | 15°/23°/36°/50°               |             |             |
| Color temperature                                                                 | 2700K/3000K/3500K/4000K/5000K |             |             |
| Light efficiency                                                                  | 87lm/W                        |             |             |
| Color rendering index                                                             | ≥90                           |             |             |
| Operating temperature                                                             | -25-+50                       |             |             |
| Rated life hours                                                                  | 35,000-50,000H                |             |             |
| LED chip                                                                          | COB                           |             |             |
| CE CB TÜV CCC ENEC IP 20 220-240V Voltage Adjustable Adjustable UGR<19 Adjustable |                               |             |             |

| OPTIONS |           |
|---------|-----------|
| 1       | NO DIM    |
| 2       | DIM 1-10V |
| 3       | DALI 2    |

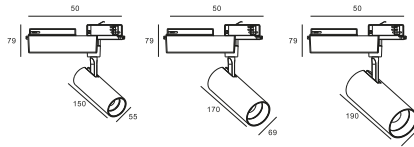

COLOUR | BK ■ WH □ | MATERIAL | AL |



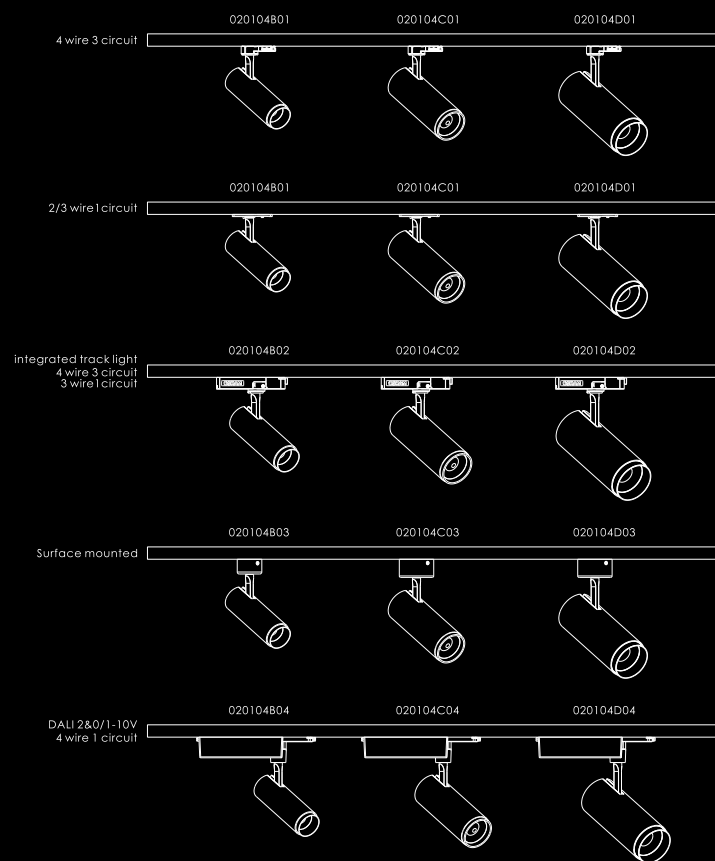

NEW  
POT



| POT | TK/1215/4B01                                                                                                                                                                                                      |                               |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
|     | Power                                                                                                                                                                                                             | 12W/15W                       |
|     | Beam angle                                                                                                                                                                                                        | 15°-36°/36°-60°               |
|     | Color temperature                                                                                                                                                                                                 | 2700K/3000K/3500K/4000K/5000K |
|     | Light efficiency                                                                                                                                                                                                  | 96lm/W                        |
|     | Color rendering index                                                                                                                                                                                             | ≥90                           |
|     | Operating temperature                                                                                                                                                                                             | -25+50                        |
|     | Rated life hours                                                                                                                                                                                                  | 35,000-50,000H                |
|     | LED chip                                                                                                                                                                                                          | COB                           |
|     | <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>90°</div> <div>355°</div> <div></div> <div></div> <div></div> </div> </div> |                               |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable                                                                                                                                                        |                               |



| POT | TK/015/4B01                                                                                                                                                                                                       |                               |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
|     | Power                                                                                                                                                                                                             | 15W                           |
|     | Beam angle                                                                                                                                                                                                        | 15°-36°/36°-60°               |
|     | Color temperature                                                                                                                                                                                                 | 2700K/3000K/3500K/4000K/5000K |
|     | Light efficiency                                                                                                                                                                                                  | 95lm/W                        |
|     | Color rendering index                                                                                                                                                                                             | ≥90                           |
|     | Operating temperature                                                                                                                                                                                             | -25+50                        |
|     | Rated life hours                                                                                                                                                                                                  | 35,000-50,000H                |
|     | LED chip                                                                                                                                                                                                          | COB                           |
|     | <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>90°</div> <div>355°</div> <div></div> <div></div> <div></div> </div> </div> |                               |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable                                                                                                                                                        |                               |



| POT | TK/2025/4C01                                                                                                                                                                                                      |                               |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
|     | Power                                                                                                                                                                                                             | 20W/25W                       |
|     | Beam angle                                                                                                                                                                                                        | 15°-36°/36°-60°               |
|     | Color temperature                                                                                                                                                                                                 | 2700K/3000K/3500K/4000K/5000K |
|     | Light efficiency                                                                                                                                                                                                  | 80lm/W                        |
|     | Color rendering index                                                                                                                                                                                             | ≥90                           |
|     | Operating temperature                                                                                                                                                                                             | -25+50                        |
|     | Rated life hours                                                                                                                                                                                                  | 35,000-50,000H                |
|     | LED chip                                                                                                                                                                                                          | COB                           |
|     | <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>90°</div> <div>355°</div> <div></div> <div></div> <div></div> </div> </div> |                               |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable                                                                                                                                                        |                               |



| POT | TK/020/4C02                                                                                                                                                                                                       | TK/025/4C02                   | TK/028/4C02 | TK/030/4C02 |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------|-------------|
|     | Power                                                                                                                                                                                                             | 20W/25W/28W/30W               |             |             |
|     | Beam angle                                                                                                                                                                                                        | 15°-36°/36°-60°               |             |             |
|     | Color temperature                                                                                                                                                                                                 | 2700K/3000K/3500K/4000K/5000K |             |             |
|     | Light efficiency                                                                                                                                                                                                  | 85lm/W                        |             |             |
|     | Color rendering index                                                                                                                                                                                             | ≥90                           |             |             |
|     | Operating temperature                                                                                                                                                                                             | -25+50                        |             |             |
|     | Rated life hours                                                                                                                                                                                                  | 35,000-50,000H                |             |             |
|     | LED chip                                                                                                                                                                                                          | COB                           |             |             |
|     | <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>90°</div> <div>355°</div> <div></div> <div></div> <div></div> </div> </div> |                               |             |             |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable                                                                                                                                                        |                               |             |             |




| POT | TK/2832/4D01                                                                                                                                                                                                      |                               |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|
|     | Power                                                                                                                                                                                                             | 28W/32W                       |
|     | Beam angle                                                                                                                                                                                                        | 15°-36°/36°-60°               |
|     | Color temperature                                                                                                                                                                                                 | 2700K/3000K/3500K/4000K/5000K |
|     | Light efficiency                                                                                                                                                                                                  | 90lm/W                        |
|     | Color rendering index                                                                                                                                                                                             | ≥90                           |
|     | Operating temperature                                                                                                                                                                                             | -25+50                        |
|     | Rated life hours                                                                                                                                                                                                  | 35,000-50,000H                |
|     | LED chip                                                                                                                                                                                                          | COB                           |
|     | <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>90°</div> <div>355°</div> <div></div> <div></div> <div></div> </div> </div> |                               |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable                                                                                                                                                        |                               |



| POT | TK/032/4D02                                                                                                                                                                                                       | TK/035/2D02                   | TK/042/4D02 |
|-----|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------|-------------|
|     | Power                                                                                                                                                                                                             | 32W/35W/42W                   |             |
|     | Beam angle                                                                                                                                                                                                        | 15°-36°/36°-60°               |             |
|     | Color temperature                                                                                                                                                                                                 | 2700K/3000K/3500K/4000K/5000K |             |
|     | Light efficiency                                                                                                                                                                                                  | 88lm/W                        |             |
|     | Color rendering index                                                                                                                                                                                             | ≥90                           |             |
|     | Operating temperature                                                                                                                                                                                             | -25+50                        |             |
|     | Rated life hours                                                                                                                                                                                                  | 35,000-50,000H                |             |
|     | LED chip                                                                                                                                                                                                          | COB                           |             |
|     | <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div></div> <div></div> <div>IP 20</div> </div> <div> <div>220-240V</div> <div>90°</div> <div>355°</div> <div></div> <div></div> <div></div> </div> </div> |                               |             |
|     | Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable                                                                                                                                                        |                               |             |

OPTIONS


|   |        |
|---|--------|
| 1 | NO DIM |
| 2 | TRIAC  |

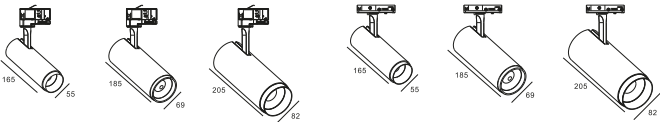

COLOUR | BK ■ WH □ | MATERIAL | AL

OPTIONS

|   |        |
|---|--------|
| 1 | NO DIM |
| 2 | TRIAC  |



COLOUR | BK ■ WH □ | MATERIAL | AL



| POT                                                                                                                                                                                                                                                                                | TK/1215/4B03          |                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|
|                                                                                                                                                                                                                                                                                    | Power                 | 12W/15W                       |
|                                                                                                                                                                                                                                                                                    | Beam angle            | 15°-36°/36°-60°               |
|                                                                                                                                                                                                                                                                                    | Color temperature     | 2700K/3000K/3500K/4000K/5000K |
|                                                                                                                                                                                                                                                                                    | Light efficiency      | 97lm/W                        |
|                                                                                                                                                                                                                                                                                    | Color rendering index | ≥90                           |
|                                                                                                                                                                                                                                                                                    | Operating temperature | -25+50                        |
|                                                                                                                                                                                                                                                                                    | Rated life hours      | 35,000-50,000H                |
|                                                                                                                                                                                                                                                                                    | LED chip              | C.O.B                         |
| <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div>CCC</div> <div> <div>220-240V</div> <div>IP 20</div> </div> </div> <div> <div>Voltage</div> <div>Adjustable</div> <div>Adjustable</div> <div>Euro adapt</div> <div>UGR&lt;19</div> <div>Adjustable</div> </div> </div> |                       |                               |



| POT                                                                                                                                                                                                                                                                                | TK/010/4B04 TK/015/4B04 |                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------|-------------------------------|
|                                                                                                                                                                                                                                                                                    | Power                   | 10W/15W                       |
|                                                                                                                                                                                                                                                                                    | Beam angle              | 15°-36°/36°-60°               |
|                                                                                                                                                                                                                                                                                    | Color temperature       | 2700K/3000K/3500K/4000K/5000K |
|                                                                                                                                                                                                                                                                                    | Light efficiency        | 93lm/W                        |
|                                                                                                                                                                                                                                                                                    | Color rendering index   | ≥90                           |
|                                                                                                                                                                                                                                                                                    | Operating temperature   | -25+50                        |
|                                                                                                                                                                                                                                                                                    | Rated life hours        | 35,000-50,000H                |
|                                                                                                                                                                                                                                                                                    | LED chip                | C.O.B                         |
| <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div>CCC</div> <div> <div>220-240V</div> <div>IP 20</div> </div> </div> <div> <div>Voltage</div> <div>Adjustable</div> <div>Adjustable</div> <div>Euro adapt</div> <div>UGR&lt;19</div> <div>Adjustable</div> </div> </div> |                         |                               |



| POT                                                                                                                                                                                                                                                                                | TK/2025/4C03          |                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|
|                                                                                                                                                                                                                                                                                    | Power                 | 20W/25W                       |
|                                                                                                                                                                                                                                                                                    | Beam angle            | 15°-36°/36°-60°               |
|                                                                                                                                                                                                                                                                                    | Color temperature     | 2700K/3000K/3500K/4000K/5000K |
|                                                                                                                                                                                                                                                                                    | Light efficiency      | 82lm/W                        |
|                                                                                                                                                                                                                                                                                    | Color rendering index | ≥90                           |
|                                                                                                                                                                                                                                                                                    | Operating temperature | -25+50                        |
|                                                                                                                                                                                                                                                                                    | Rated life hours      | 35,000-50,000H                |
|                                                                                                                                                                                                                                                                                    | LED chip              | C.O.B                         |
| <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div>CCC</div> <div> <div>220-240V</div> <div>IP 20</div> </div> </div> <div> <div>Voltage</div> <div>Adjustable</div> <div>Adjustable</div> <div>Euro adapt</div> <div>UGR&lt;19</div> <div>Adjustable</div> </div> </div> |                       |                               |



| POT                                                                                                                                                                                                                                                                                                                                                                                                                                 | TK/020/4C04           | TK/025/4C04                   | TK/028/4C04 | TK/030/4C04 |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|-------------|-------------|
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | Power                 | 20W/25W/28W/30W               |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | Beam angle            | 15°-36°/36°-60°               |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | Color temperature     | 2700K/3000K/3500K/4000K/5000K |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | Light efficiency      | 81lm/W                        |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | Color rendering index | ≥90                           |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | Operating temperature | -25.+50                       |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | Rated life hours      | 35,000-50,000H                |             |             |
|                                                                                                                                                                                                                                                                                                                                                                                                                                     | LED chip              | COB                           |             |             |
| <div><div><div><div><div>CE</div><div>CB</div><div>TUV</div><div>CCC</div></div><div><div><div><div>220-240V</div><div>IP 20</div></div><div><div>Voltage</div><div>Adjustable</div></div></div><div><div><div>90°</div><div>Adjustable</div></div><div><div><div>3555</div><div>COB</div></div><div><div>Euro adapt</div><div>UGR&lt;19</div></div></div><div><div><div>Adjustable</div></div></div></div></div></div></div></div> |                       |                               |             |             |




| POT                                                                                                                                                                                                                                                                                | TK/2832/4D03          |                               |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|
|                                                                                                                                                                                                                                                                                    | Power                 | 28W/32W                       |
|                                                                                                                                                                                                                                                                                    | Beam angle            | 15°-36°/36°-60°               |
|                                                                                                                                                                                                                                                                                    | Color temperature     | 2700K/3000K/3500K/4000K/5000K |
|                                                                                                                                                                                                                                                                                    | Light efficiency      | 89lm/W                        |
|                                                                                                                                                                                                                                                                                    | Color rendering index | ≥90                           |
|                                                                                                                                                                                                                                                                                    | Operating temperature | -25+50                        |
|                                                                                                                                                                                                                                                                                    | Rated life hours      | 35,000-50,000H                |
|                                                                                                                                                                                                                                                                                    | LED chip              | C.O.B                         |
| <div> <div> <div>CE</div> <div>CB</div> <div>TUV</div> <div>CCC</div> <div> <div>220-240V</div> <div>IP 20</div> </div> </div> <div> <div>Voltage</div> <div>Adjustable</div> <div>Adjustable</div> <div>Euro adapt</div> <div>UGR&lt;19</div> <div>Adjustable</div> </div> </div> |                       |                               |




| POT                                                                                                                                                                                                                                                                                                                                                                                          | TK/032/4D04           | TK/035/4D04                   | TK/042/4D04 |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|-------------|
|                                                                                                                                                                                                                                                                                                                                                                                              | Power                 | 32W/35W/42W                   |             |
|                                                                                                                                                                                                                                                                                                                                                                                              | Beam angle            | 15°-36°/36°-60°               |             |
|                                                                                                                                                                                                                                                                                                                                                                                              | Color temperature     | 2700K/3000K/3500K/4000K/5000K |             |
|                                                                                                                                                                                                                                                                                                                                                                                              | Light efficiency      | 87lm/W                        |             |
|                                                                                                                                                                                                                                                                                                                                                                                              | Color rendering index | ≥90                           |             |
|                                                                                                                                                                                                                                                                                                                                                                                              | Operating temperature | -25~+50                       |             |
|                                                                                                                                                                                                                                                                                                                                                                                              | Rated life hours      | 35,000-50,000H                |             |
|                                                                                                                                                                                                                                                                                                                                                                                              | LED chip              | COB                           |             |
| <div><div><div><div>CE</div><div>CB</div><div>TUV</div><div>CCC</div></div><div><div><div><div>220-240V</div><div>IP 20</div></div><div><div>Voltage</div><div>Adjustable</div></div></div><div><div><div>355°</div><div><div></div></div></div><div><div>Adjustable</div><div>Euro adapt</div></div></div><div><div><div>UGR&lt;19</div><div>Adjustable</div></div></div></div></div></div> |                       |                               |             |

| OPTIONS |        |
|---------|--------|
| 1       | NO DIM |
| 2       | TRIAC  |



COLOUR | BK ■ WH □ | MATERIAL | AL

| OPTIONS |           |
|---------|-----------|
| 1       | NO DIM    |
| 2       | DIM 1-10V |
| 3       | DALI/2    |

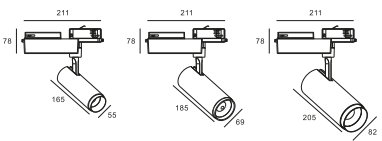

COLOUR | BK ■ WH □ | MATERIAL | AL



ALA

- LUCE -



ALA


TK/012/106A TK/015/106A TK/020/106A

|                       |                               |
|-----------------------|-------------------------------|
| Power                 | 12W/15W/20W                   |
| Beam angle            | 15°/23°/36°                   |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 87lm/W                        |
| Color rendering index | ≥90                           |
| Operating temperature | -25+50                        |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | COB                           |

CE CB TÜV CCC ENEC IP 20 220-240V 10W 350° Euro adapt UGR<19 Adjustable

#### OPTIONS

|   |           |
|---|-----------|
| 1 | NO DIM    |
| 2 | DIM 1-10V |
| 3 | TRIAC     |



COLOUR | BK ■ WH □

MATERIAL | AL



RGP



- LUCE -

| RGP                   | TK/042/7A03                   | TK/050/7A03 |
|-----------------------|-------------------------------|-------------|
| Power                 | 42W/50W                       |             |
| Beam angle            | 12°/23°/36°/60°               |             |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |             |
| Light efficiency      | 84lm/W                        |             |
| Color rendering index | ≥90                           |             |
| Operating temperature | -25+50                        |             |
| Rated life hours      | 35,000-50,000H                |             |
| LED chip              | COB                           |             |

CE CB TÜV CCC ENEC IP 20 220-240V 10W 35W Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable




black



white

| OPTIONS |           |
|---------|-----------|
| 1       | NO DIM    |
| 2       | DIM 1-10V |
| 3       | DIM DALI  |
| 4       | TRIAC     |



COLOUR | BK ■ WH □

MATERIAL | AL



# SNIPER



- LUCE -





|                       |                               |
|-----------------------|-------------------------------|
| SNIPER                | TK/121520/103A                |
| Power                 | 12W/15W/20W                   |
| Beam angle            | 15°/23°/38°/60°               |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 74lm/W                        |
| Color rendering index | ≥90                           |
| Operating temperature | -25-+50                       |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | COB                           |

CE

CB

TUV

CCC

IP20

220-240V~50/60Hz


Adjustable

Adjustable






Euro adapt

UGR<19

Adjustable

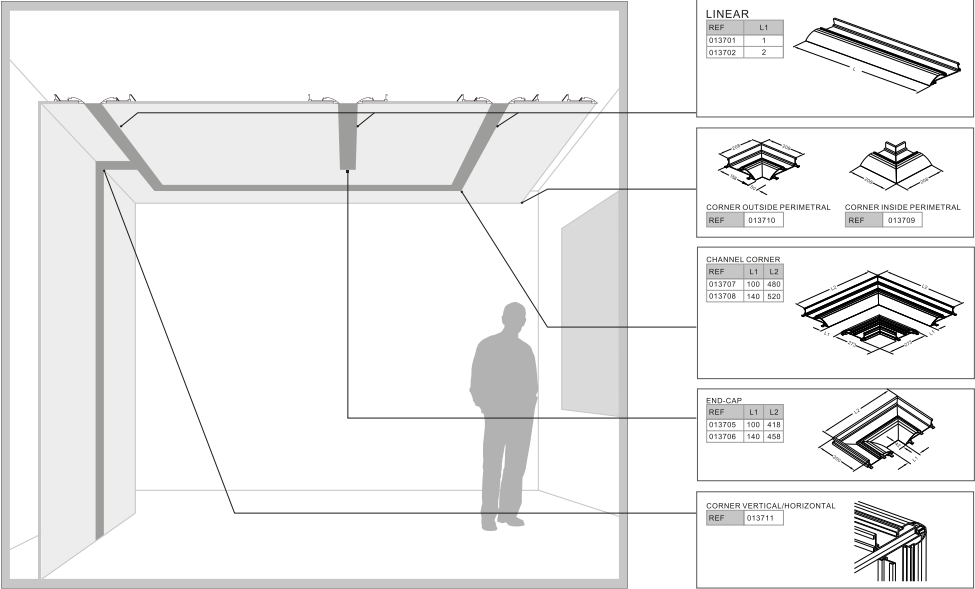

|             |
|-------------|
| OPTIONS     |
| 1 NO DIM    |
| 2 DIM 1-10V |
| 3 DIM DALI  |
| 4 TRIAC     |

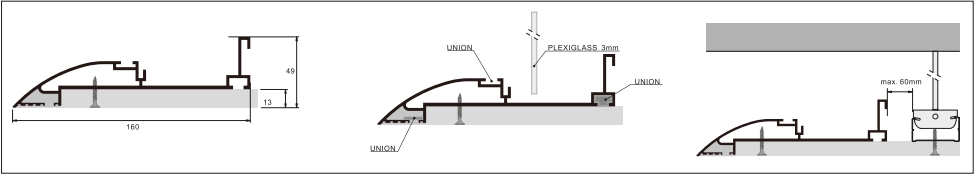

COLOUR | BK ■ WH □ | MATERIAL | AL |



GRAB



- LUCE -

GRAB


TK/025/4B03 TK/030/4B03

|                       |                               |
|-----------------------|-------------------------------|
| Power                 | 25W/30W                       |
| Beam angle            | 15°-36°/36°-60°               |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |
| Light efficiency      | 93lm/W                        |
| Color rendering index | ≥85                           |
| Operating temperature | -25+50                        |
| Rated life hours      | 35,000-50,000H                |
| LED chip              | COB                           |

CE CB TÜV CCC ENEC IP 20 220-240V 10W 3527 Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable

OPTIONS

|   |           |
|---|-----------|
| 1 | NO DIM    |
| 2 | DIM 1-10V |
| 3 | TRIAC     |



COLOUR | BK ■ WH □

MATERIAL | AL





# TO

## Design, without limits

Now, the range of possibilities for creating smaller and more compact spotlights is much wider. And the freedom granted to our designers to create spectacular new models allows us to talk about the present and to foresee a future full of illusions.




- LUCE -

| TO                    | TK/020/5A01                   | TK/025/5A01 |
|-----------------------|-------------------------------|-------------|
| Power                 | 20W/25W                       |             |
| Beam angle            | 15°/23°/36°/60°               |             |
| Color temperature     | 2700K/3000K/3500K/4000K/5000K |             |
| Light efficiency      | 70lm/W                        |             |
| Color rendering index | ≥90                           |             |
| Operating temperature | -25/+50                       |             |
| Rated life hours      | 35,000-50,000H                |             |
| LED chip              | COB                           |             |

CE CB TÜV CCC ENEC IP 20 220-240V 15W 35W Voltage Adjustable Adjustable Euro adapt UGR<19 Adjustable

## OPTIONS

|   |           |
|---|-----------|
| 1 | NO DIM    |
| 2 | DIM 1-10V |
| 3 | DIM DALI  |



COLOUR | BK ■ WH □ | MATERIAL | AL |



SMILE




- LUCE -

| SMILE                                                                                                                                                                                      | TK/08/8B01            | TK/010/8B01                   |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|
|                                                                                                                                                                                            |                       |                               |
|                                                                                                                                                                                            | Power                 | 8W/10W                        |
|                                                                                                                                                                                            | Beam angle            | wallwasher                    |
|                                                                                                                                                                                            | Color temperature     | 2700K/3000K/3500K/4000K/5000K |
|                                                                                                                                                                                            | Light efficiency      | 63lm/W                        |
|                                                                                                                                                                                            | Color rendering index | ≥90                           |
|                                                                                                                                                                                            | Operating temperature | -25-+50                       |
|                                                                                                                                                                                            | Rated life hours      | 35,000-50,000H                |
|                                                                                                                                                                                            | LED chip              | COB                           |
| <div><div>CE CB TÜV CCC</div><div>IP 20</div><div>220-240V</div><div>355</div><div>Voltage</div><div>Adjustable</div><div>Euro adapt</div><div>UGR&lt;19</div><div>Wall washer</div></div> |                       |                               |

| SMILE                                                                                                            | TK/08/8C01            | TK/010/8C01                   |
|------------------------------------------------------------------------------------------------------------------|-----------------------|-------------------------------|
|                                                                                                                  |                       |                               |
|                                                                                                                  | Power                 | 8W/10W                        |
|                                                                                                                  | Beam angle            | wallwasher                    |
|                                                                                                                  | Color temperature     | 2700K/3000K/3500K/4000K/5000K |
|                                                                                                                  | Light efficiency      | 63lm/W                        |
|                                                                                                                  | Color rendering index | ≥90                           |
|                                                                                                                  | Operating temperature | -25-+50                       |
|                                                                                                                  | Rated life hours      | 35,000-50,000H                |
|                                                                                                                  | LED chip              | COB                           |
| <div><div>CE CB TÜV CCC</div><div>IP 20</div><div>220-240V</div><div>UGR&lt;19</div><div>Wall washer</div></div> |                       |                               |

| OPTIONS |        |
|---------|--------|
| 1       | NO DIM |



COLOUR | BK ■ WH □ | MATERIAL | PC | AL |